SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1899, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXXX.—No. 24. ESTABLISHED 1845 | NEW YORK, JUNE 17, 1899. | $3.00 A YEAR. WEEKLY.

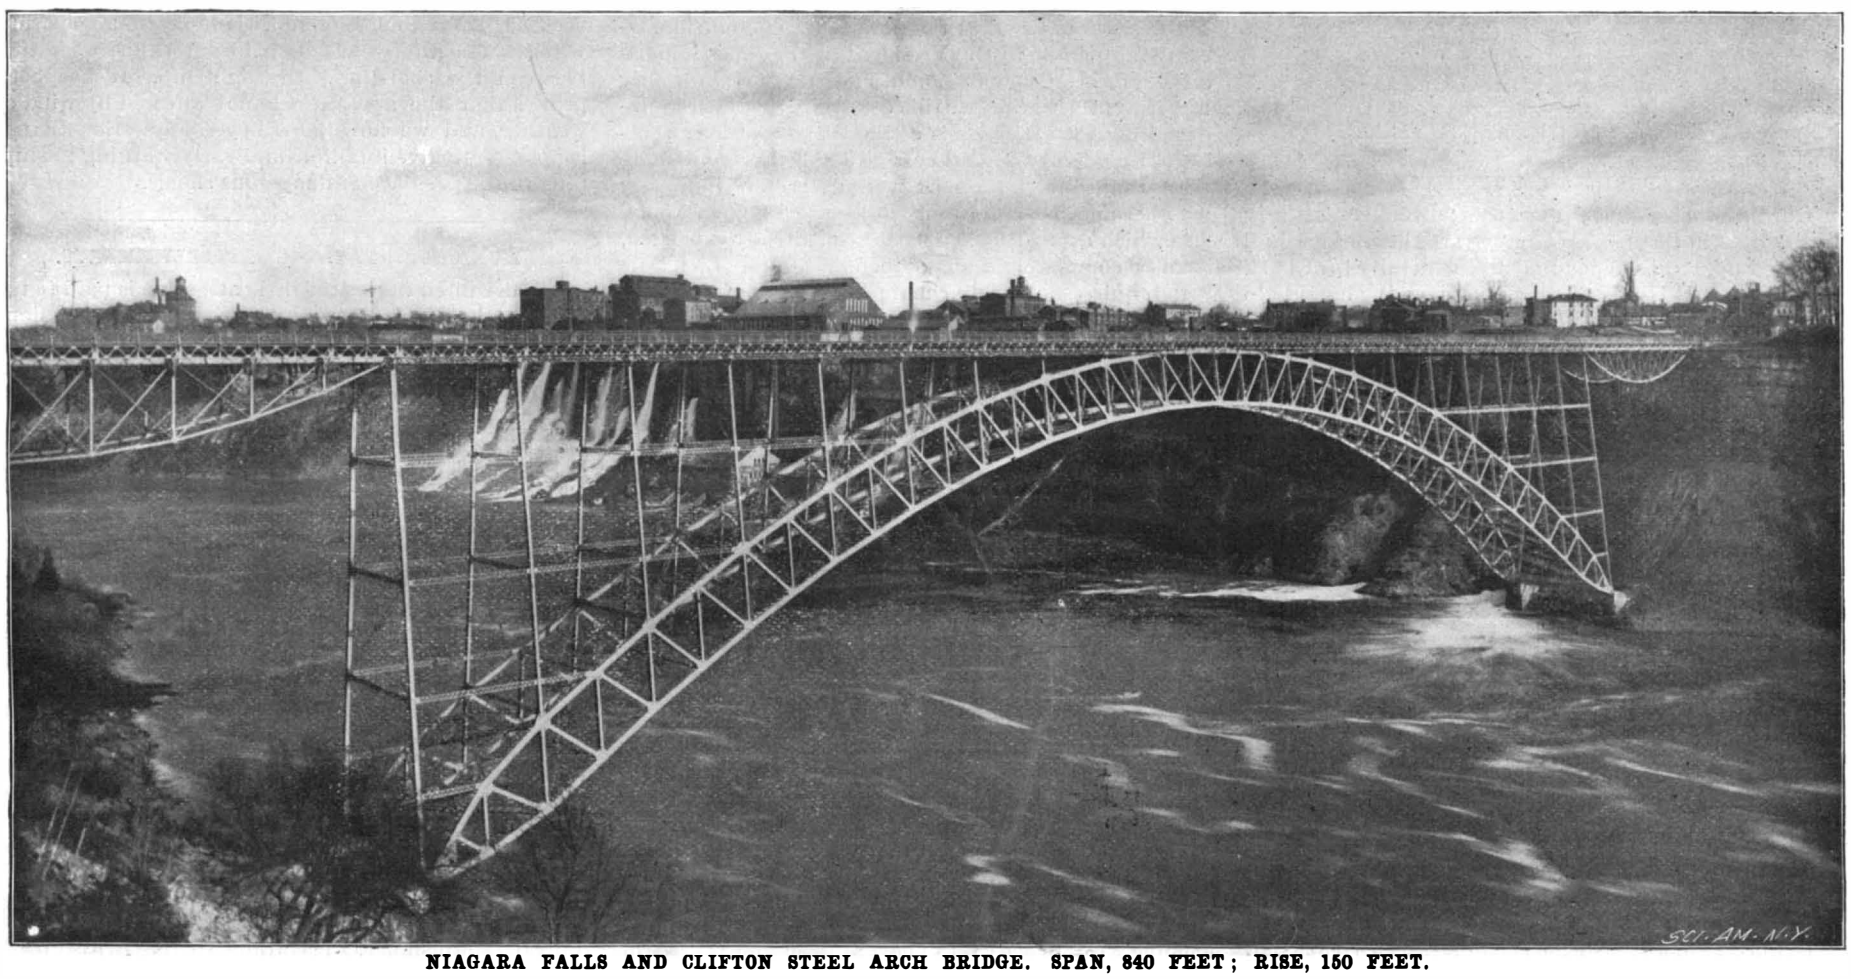

NIAGARA FALLS AND CLIFTON STEEL ARCH BRIDGE. SPAN, 840 FEET; RISE, 150 FEET.

THE BRIDGES OF NIAGARA GORGE—NIAGARA RAILWAY ARCH BRIDGE. SPAN, 550 FEET; RISE, 114 FEET.—[See page 396.]

© 1899 SCIENTIFIC AMERICAN, INC.

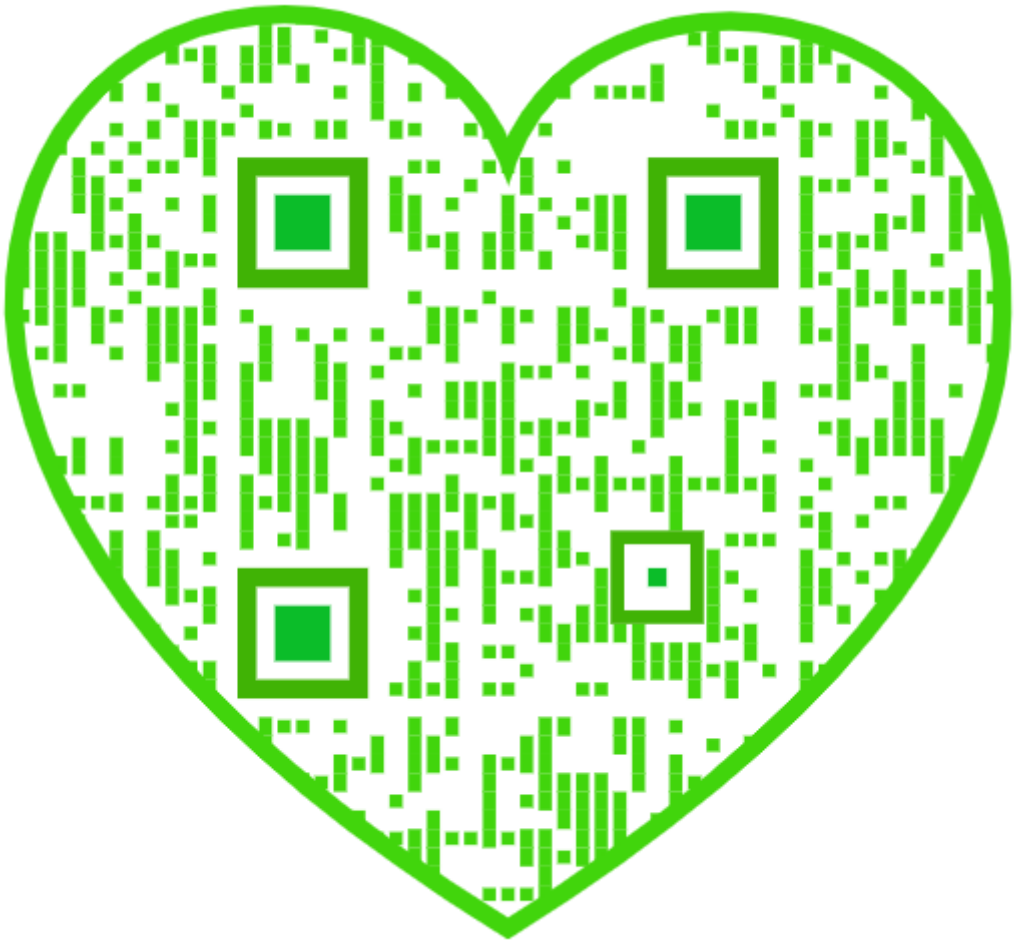

Scientific American.

ESTABLISHED 1845.

MUNN & CO., - - - EDITORS AND PROPRIETORS.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, - - NEW YORK.

TERMS TO SUBSCRIBERS.

One copy, one year, for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845)..... $3.00 a year.
Scientific American Supplement (Established 1876)..... 5.00 "
Scientific American Building Edition (Established 1885)..... 2.50 "
Scientific American Export Edition (Established 1878)..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner Franklin Street, New York.

NEW YORK, SATURDAY, JUNE 17, 1899.

A PERIL TO THE NAVY.

Our finest armored cruiser, the "Brooklyn," is now in dry dock at the Brooklyn navy yard, having her hull patched up, straightened out and generally bent back into shape. It is only a few weeks since the battleship "Massachusetts" was in the same dock, undergoing the same treatment. In both cases these fine ships were disabled within a mile or so of the Brooklyn navy yard and at a time when they were steering a correct course through the proper harbor channels. The "Massachusetts," when the mishap occurred, was on the way to join Admiral Sampson's squadron, and though she was fully equipped for sea, with all stores on board, and down to her maximum draught, she should nevertheless have had ample water in the channels between the navy yard and the sea. As it was she grounded heavily on the Diamond Shoal, a reef that extends into the channel from Governor's Island, and received injuries which took many months to repair and cost the government about $50,000. The "Brooklyn" grounded, or struck a sunken obstruction, when in mid-channel between Governor's Island and the Battery, on her way to the Decoration-day services at Grant's Tomb. Her bottom plates were indented, rivets sheared off, and damage done that will cost about $8,000 to repair.

How long is this kind of thing to continue? If the recurrence of such preventible disasters were not suggestive of the grave perils to which the navy is exposed, it would become positively ridiculous—with such imperturbable gravity do we wreck our ships, and then proceed to patch them up again at so many thousand dollars apiece. The wonder of it all is that these obstructions were not removed from the channels years ago, when our first deep-draught warships were constructed. Surely it was not necessary for the "Massachusetts" to smash up $60,000 worth of her bottom to convince us that Diamond Shoal was a reality, and not a fiction—a few fathoms of sounding line would have done that; and if there are sunken wrecks encumbering the channels of New York Harbor, it is surely a doubtful policy to use the bottom of the "Brooklyn" as a dragnet to determine their whereabouts.

We know nothing in all the river and harbor work of the War Department that compares in urgency with this problem of the approaches to the Brooklyn navy yard, and how it should come to be thus neglected is a mystery. Just beyond Governor's Island, skirting the Brooklyn water front, a channel 1,500 feet wide and 40 feet deep is to be constructed along the front of a series of docks into which a 25-foot draught ship will rarely enter; yet the ships of the navy are allowed to pass to and fro in peril for the want of a little dredging which would cost not a tithe of the millions that are to be spent on the above-named work.

WHAT POOR ROADS COST OUR FARMERS.

If ever there were two classes of people that had a good cause in common they are the bicyclists and the farmers. The question on which their interests agree is that of the need for good roads; for while a hard, smooth surface is an absolute necessity to the wheelman, it is of even more vital importance to the farmer, seeing that the condition of the roads makes a serious difference one way or the other in his yearly profits. As the result of an inquiry made in 1895 by the United States Department of Agriculture, replies were received from over 1,200 counties giving the cost of hauling crops in various parts of the United States. The average load hauled was found to be 2,002 pounds; the average length of haul, $12\frac{1}{10}$ miles; the average cost of hauling a ton of crops to market was $3.02; while the average cost of hauling a ton for a distance of one mile was 25 cents.

In order to compare the roads of the United States with those of Europe the bureau through its consuls made careful inquiry on the subject of cost of hauling in England, France, Germany, Belgium, Italy, and Switzerland. The average cost of hauling one ton one mile was found to be in England 10 cents, in France 10 cents, in Germany 8½ cents, in Belgium 9½ cents, in Italy 7½ cents, and in Switzerland from 6 to 8 cents, the average for all these European states being $8\frac{6}{10}$ cents per ton per mile. More than one cause may enter into this determination of cost, but that the great cost in America is due to our poorly made dirt roads is proved by the fact that while over the superb roads of Europe a farmer will haul three or four tons at a load, our farmers are able to haul only a ton or less than a ton over the "plow and scraper" ridge of soil which even at this late day is dignified by the name of road in many parts of the country.

THE NEW CANAL COMMISSION.

Bearing in mind the vast interests at stake, we do not hesitate to say that the new canal commission, recently appointed by the President, is the most important engineering commission of modern times. Not only has it to decide whether this country is justified in undertaking a work which is estimated to cost over $130,000,000, and may easily cost 30 or 40 per cent more than that, but its report will determine indirectly whether another important work—the Panama Canal—in which over $156,000,000 has been already expended, shall be completed or abandoned.

It requires no very intimate knowledge of the canal question to prove that only one canal is required at the Isthmus, and that not more than one will be built. It is also evident to any one who is not blinded by national prejudice that a great maritime highway like this should be, and in the very nature of things must be, broadly international in the policy of its administration. As the matter now stands, there are two great rival projects before the public—one two-fifths completed and the other not yet commenced. Each has features to recommend it, although engineering, commercial, and military considerations point strongly to the completion of the Panama Canal as the most feasible scheme.

Although the present commission has been appointed for the ostensible purpose of examining all routes that are plausible, it is well understood that its chief duty is to determine which of the two routes, Nicaragua or Panama, has most to commend it to the active support of the United States government. To assist it in this work it will find a vast amount of engineering data ready to hand. At Nicaragua, in addition to the early surveys of Childs and Lull, it will have the Menocal surveys and those of the Ludlow and Walker commissions. At Panama it will find a complete set of surveys, plans, observations, etc., in such shape as to allow of active construction being undertaken at brief notice.

The commission includes Admiral Walker, Prof. Haupt, and Col. Hains, the former commission; Alfred Noble, of the Ludlow commission; two additional engineers, viz., Lieut.-Col. Oswald H. Ernst, of the United States Army, and George S. Morison, a former President of the Society of Civil Engineers; Prof. Wm. H. Burr of Columbia and Prof. Emory R. Johnson of Pennsylvania and Senator Pasco of Florida. There are thus two engineers from the army, three from civil life, two college professors, a senator and an admiral of the navy. One million dollars has been appropriated to cover the expenses of the investigation, which, all things considered, should be of such a character as to settle the question, as far as the United States is concerned, once and forever.

COMMERCIAL VALUE OF WIRELESS TELEGRAPHY.

A striking evidence of the growth of scientific knowledge and the fidelity with which the scientific press safeguards the public against glaring scientific falsehood, is found in the recent attempt to produce a panic among the shareholders in telegraph and cable companies on account of the success of wireless telegraphy. It was otherwise twenty years ago, when the extravagant claims put forth for electric lighting caused the holders of gas shares to dispose of their valuable holdings. In vain did the scientific press urge moderation, pointing out that the cost and difficulties of the new system of illumination would prevent it from driving out gas lighting—at least for some years to come.

Remarkable as have been the results obtained with wireless telegraphy across the English Channel, there is nothing to warrant the belief that wire telegraphy is doomed. There is one radical difficulty which, alone, is sufficient to restrict wireless telegraphy, at least in the present stage of its development, to a very limited range of practical application. We refer to the fact that no means has yet been devised by which the wireless messages can be directed exclusively to the station for which they are intended. Before wireless telegraphy can be used for general commercial purposes some method must be devised whereby, as in wire telegraphy, the transmitter can communicate with one particular receiver to the exclusion of all others, and the receiver can exclude all messages except the particular one directed to it. Until this is achieved the new system must be barred from the field of ordinary commercial work.

A limitation affecting long distance telegraphy is also found in the fact that the length of the vertical rod has a definite relation to the distance through which the message is sent, and as the mast used in the channel experiments, where the distance was 30 miles, was 177 feet high, it can be seen that this consideration also imposes a limit upon wireless telegraphy. Marconi has recently stated that the present limit of distance over which messages can be sent is about 80 miles; evidently then the problem of trans-ocean telegraphy by this system is far from solution. As a matter of fact, the inventor, with his characteristic modesty, has refrained from making any claims for his system except along those lines in which he has clearly demonstrated its usefulness. The most valuable application of the system is that which was successfully tested at the South Foreland, England, where now for some time wireless telegraphy has been in successful operation between the shore and the lightship. It has been proved that the apparatus is not affected by wind or weather, and we now know beyond question that it is possible to give infallible and early warning to shipping of the presence of dangerous shoals.

MUNICIPAL BATHING ESTABLISHMENTS.

In the United States too little attention is paid to the individual comfort of its citizens. Everything is done for their safety, but in many little ways we are still far behind our transatlantic brethren. One of our greatest municipal defects is the lack of public baths. It is not necessary to dwell upon the need for public baths among all civilized peoples, the virtue of water and soap is conceded. Unfortunately, among the poorer classes it is not always possible for them to obtain adequate bathing facilities in the densely populated districts in which they live. Public baths properly constructed and handled form one of the most effective and far-reaching of municipal institutions for the promotion of cleanliness, good health and good citizenship. Boston, Mass., is a notable exception to the average American city as regards the bathing facilities which this city furnishes to her inhabitants. The experiments of Boston are highly instructive to all cities looking to civic development in the direction of ministering to the practical and essential needs of a community. Public baths in Boston date from 1866, and these were, we believe, the first public baths to be established by a municipality in this country. At first provision was made for a system of baths distributed at various points on the long shore line rather than for a few central establishments according to the British plan. Five floating baths were constructed at that time, and the general type was a low wooden building supported on a floating platform. Within each was a shallow tank through which the water flowed freely, air and light being admitted through the roof. The usual dressing rooms, etc., were provided. These proved so satisfactory that now there are ten of these floating baths.

In 1898 the number of bathing establishments was raised to twenty-three and there were 2,000,000 bathers, an increase of one and one-quarter millions over the previous year. New styles of floating baths have been devised in which the tank is left open to the sky and the capacity of one of them is 1,200 to 1,500 persons per day. In addition to the floating baths two swimming pools were established to supply the wants of the population which lives in the center of Boston. One of them is located in the small park contiguous to the tenement district of Roxbury, fresh water being supplied to the tanks by the city water works, 80,000 to 90,000 gallons being used per day, and from 1,200 to 1,500 patrons daily attend this bath. Men are allowed to bathe in the early morning and evening, the boys in the forenoon and girls and women in the afternoon. That a pool of this kind is not necessarily an expensive luxury will be seen when it is said that it cost only $2,000 to complete it.

The most important of Boston's beach baths is at the North End Park, which, with its pleasure piers and improvements, cost the city $350,000. Frequently 5,000 people bathe per day at this point. The baths which we have mentioned so far are, of course, restricted to summer use; but a new public bath house, open all the year around, will be opened on June 15. The building is most substantial and is thoroughly fireproof. Separate bath rooms for men and women are provided on the second floor, and ample waiting rooms occupy the first floor. The men's rooms are provided with thirty inclosed shower baths and three inclosed tubs, while the women have eleven shower baths and six bathing cabinets. Each shower cabinet contains a dressing alcove and seat. All the partitions are of marble and the fittings are of the latest sanitary type, and the bather can regulate the temperature of the water flowing from the spray as desired. The tubs are of heavy white porcelain, with nickel-plated fittings, and it is doubtful if there is any more real comfort to be obtained in the luxurious bath rooms of the Back Bay district.

In the practical working of the entire system in Boston, fatalities are practically unknown. Swimming instruction is given to thousands and remedies are provided for use in case of cramps or other illnesses. In

© 1899 SCIENTIFIC AMERICAN, INC.

order to connect the baths more closely with the city schools, the head swimming instructor visits the public educational institutions before the close of the school year and teaches the children the motions of swimming. The aim in Boston has been to dignify the practice of bathing and to furnish an innocent recreation and to cause the people to regard bathing establishments as necessary to their well-being as the water supply, school house, library, or parks. The course of Boston in this matter cannot be commended too warmly, and the object lesson is of great value outside of the immediate advantage to her citizens.

CALIFORNIA OLIVE INDUSTRY.

The olive is one of the oldest known fruits. It is noted by Pliny and is frequently mentioned in the Bible, where it forms the basis of many parables and figures of speech. In Grecian mythology the olive tree occupies an important place, and to-day the "olive branch" is the world symbol for peace. The olive tree itself is rather melancholy in appearance, but the eye soon becomes accustomed to the tone which the olive trees give to the landscape, and in nearly all of the Mediterranean countries they are found almost everywhere. In general, the olive will flourish wherever the vine can be cultivated for wine-growing purposes. It will not bear a temperature below 21° or 22° F., and in Europe it cannot be grown above 46° latitude. The young plants and fruit are very delicate, but the tree itself is quite tough. Naturally, in Italy, where the olive forms one of the principal agricultural products and contributes so largely to the wealth of the country, the trees are cultivated with the greatest care. The kernel of the olive requires about two years to germinate naturally, but it is found by mixing clay and goat manure nature's processes can be hastened so that it will germinate the same year. The trees attain great age, and a large olive tree near Nice is believed to be a thousand years old and is said to have yielded 500 pounds of oil in a single year.

The culture of the olive in the United States is increasing rapidly, and in California the industry has attained such proportions that already $500,000 is invested in it. Olives were first introduced into the State by the Franciscan Missions almost a century ago. The oldest olive trees in Califoria date from the last century. They are six in number and are stationed at the San Gabriel Mission and are still bearing fruit and are a living monument to the wisdom of the Franciscan Brothers. According to some authorities, the oldest tree is at the Capistrano Mission, thirty miles south of Los Angeles. The seed from which this tree was grown came from Corsica in 1769. It is now 50 feet high and the trunk is at least 5 feet in diameter. The old trees at the Missions are as robust and thrifty as when they first commenced bearing fruit. The Franciscans raised most of their trees from cuttings which they brought from Spain. They found the soil and surroundings most congenial for olive raising, and that the trees flourished even better than on their native soil. The oil enabled the exile of the Fathers to be more supportable by supplying one of the accustomed luxuries of their far-away homes in distant Castile.

The modern history of the California olive culture began about twenty years ago, when the Hon. Ellwood Cooper, of Santa Barbara, who is regarded as the father of the industry, began his investigations on raising the olive as a commercial possibility. He first secured cuttings from the trees of the old Mission and set out a number of olive orchards in Santa Barbara and other places. The result has amply justified his venture. Now there is hardly a part of the State that has not its olive orchard. The olive seems to thrive best under the influence of sea breezes. It takes to almost any character of soil where the drainage is good and flourishes in the localities beyond the range of very heavy frosts. The tree does not require a great deal of attention, and does not resent neglect. The care of an olive orchard is less than for almost any other kind of fruit. The trees are highly symmetrical when grown, and on some ranges are planted along the roadside for the shade and the added beauty which they afford to the landscape. Olives are almost never raised from the seed, as this requires a long time. They are usually raised from cuttings, and have been produced by Mr. Cooper in the fourth year, and a good crop in seven years; 122 pounds is the average per tree. The method of propagation requires constant attention and great experience, but the plants are grown on such an enormous scale the cost of them is very small. In the spring, after the cuttings are rooted, they are transferred to olive-growing nurseries, where they become trees of from three to five feet high in from twelve to eighteen months.

In California opinions are much at variance regarding the variety of olive to grow. Formerly the Mission was the only olive planted. In recent years many different varieties have been brought from Europe. Different locations may require different varieties, but above all other considerations is the quality of the oil produced. The varieties that make the best oil should be selected in all cases, provided that quantity is a fair average to a given acreage planted. This rule is also applicable as well for pickling unless the fruit is too small for economic handling.

Mr. Cooper has trees twelve to fifteen years old which yield 250 pounds of olives, but they do not bear every year. It is estimated that there are now no less than 24,223 acres of olive trees in California, with 1,162,739 trees, of which half are now bearing. The soil must be occasionally cultivated and the trees must be pruned and sprayed to exterminate numerous insects. The greatest drawback to the successful cultivation of the olive is the black scale.

Olive oil making is a simple process; the quality depends on the care exercised from the picking of the fruit through every stage of manufacture until it is put into bottles and corked. About 8½ pounds of olives are required to a large bottle of oil. The fruit is gathered later in the season than other crops, and in the best orchards the olives are plucked one by one from the branches and not shaken from the trees or allowed to drop. Special ladders mounted on wheels are run among the branches of the trees, and the pickers ascend the ladders and pluck the olives, which they drop into a specially made device, usually of tin, strapped about the waist, and which is adapted to hold a considerable amount of fruit.

The olives must not be allowed to stand in heaps, in sacks or any sort of package long enough to heat through, otherwise the oil will become musty and rancid. Absolute cleanliness is required in every step of the process. The olives are first dried, during which process they lose about half of their weight; they are then crushed by a heavy stone rolling over them, and are next pressed the same as in cider making. The first expression is what is known as the "virgin" oil; the lower grades follow in succession. There are at least a dozen oil mills in the State of California.

A considerable part of the olive oil imported is adulterated by cotton seed and other oils, but now with the splendid olive oil made in California there should be no difficulty in getting the pure article in any part of the United States. It is a mistake to believe, however, that absolutely pure olive oil made in Southern Europe cannot be purchased here. It is expensive, but it can be bought; but the ordinary olive oil bought of grocers is apt to be adulterated, if it is not entirely fictitious. Large quantities of olives are pickled in California and are shipped in bottles or small barrels.

The olive industry is an example of what may be accomplished in the way of introducing a new agricultural pursuit in the splendid South west.

THE WORLD'S COAL PRODUCTION.

The coal production and consumption of the world during the past fifteen years are presented in some tables just prepared by the Treasury Bureau of Statistics. These show that while the United Kingdom is still the largest coal producer of the world, the United States is a close second, and if the present rate of gain is continued, will soon become the leading coal-producing country of the world. The coal production of the United Kingdom in 1897 was 202,000,000 tons; that of the United States, 179,000,000 tons; Germany, 91,000,000; France, 30,000,000; Belgium, 22,000,000; Austria-Hungary, 12,000,000; Russia, nearly 10,000,000; Australasia, nearly 5,000,000; Japan, over 5,000,000; British India, 4,000,000; Canada, nearly 4,000,000; and Spain, 2,000,000, while no other country reached 1,000,000 tons in production. The United States, however, has gained much more rapidly during the fifteen years under consideration than has the United Kingdom, or, indeed, any of the important coal-producing countries of the world, her gain during the fifteen years being over 73 per cent and that of the United Kingdom less than 24 per cent. The announcement just made by the Geological Survey that the coal product of the United States in 1898 was 219,836,000 short tons against 226,287,000 for Great Britain shows that the United States is rapidly gaining upon that country as a coal producer, and will soon become the leading coal-producing nation of the world.

As an exporter of coal, however, the United States takes low rank in proportion to its production, and stands fourth in the list of coal-exporting countries. In 1897, the exportations of coal from the United Kingdom were 48,000,000 tons; from Germany, 12,000,000 tons; from Belgium, over 6,000,000; and from the United States, a little less than 4,000,000, though in 1898 the quantity exported was slightly above 4,000,000 tons. Australasia comes next to the United States as a coal-exporting country, her exports amounting to nearly 3,000,000, tons, while France exported about 2,500,000, Japan 2,000,000, and Canada about 1,250,000 tons in 1897.

France is the largest coal-importing country, her importations in 1897 being nearly 12,000,000 tons, while Germany imported 6,000,000; Austria-Hungary, 5,600,000; Italy, 4,250,000; Canada, nearly 4,000,000; Belgium, nearly 3,000,000; Russia, 2,500,000; Sweden, over 2,250,000; the United States, nearly 1,500,000; and Australasia, 1,000,000 tons, while no other country imported as much as 1,000,000 tons.

Great Britain is also the largest consumer of coal in proportion to population, her coal consumption in 1897 being 3·87 tons per capita, that of Belgium 2·70 tons, the United States 2·42, Germany 1·58, Canada 1·25, France 0·98, Australasia 0·97, Sweden 0·50, Austria-Hungary 0·37, Spain 0·19, Italy 0·13, Russia 0·09, and Japan 0·07 of a ton per capita.

According to these figures, which are summarized from a report of the production of the principal countries of the world, just issued by the British government, the United States now produces about 30 per cent of the coal of the world, the coal production of the fourteen countries enumerated being in 1897, 566,000,000 tons, of which the United States produced 179,000,000, while in 1883 she produced but 27 per cent of the total product. The 1898 figures make an even more satisfactory showing for the United States.

THE DEATH OF FRANK THOMSON.

The American railroad is celebrated all over the world on account of the extent of the various lines, and the system and enterprise upon which they are conducted. Successful railway management calls for qualities akin to those of statesmanship, and this must be combined with technical training and business ability of the most exacting kind. Mr. Frank Thomson, of the Pennsylvania Railroad, who died on June 5, was the type of such a railway president. As the head of one of the largest of our systems, he had an opportunity which is given to few men, and he had a faculty for divining public needs before the public itself was aware of the fact. It is to him that we owe the introduction of our present dustless stone roadbeds, our block signals, and the system of prizes for faithfulness and great efficiency. It will readily be seen that the debt of the traveling public to Frank Thomson is very great.

Mr. Thomson was born at Chambersburg, Pennsylvania, in 1841. He entered the Pennsylvania Railroad shops at Altoona at the age of seventeen years, after a rudimentary education in the local schools. In four years at the Altoona shops he mastered all the mechanical principles of railroad engineering. His energy and ability were promptly recognized by the General Superintendent of the road, and when the war broke out, young Thomson was put in charge of the military railroad. He restored the Orange and Alexandria and the Loudon and Hampshire railroads. He also played an important part in the construction of the road across the "Long Bridge," over the Potomac, at Washington. In 1862 he reported for duty on the military route south of Nashville. After his return to Washington he assisted Col. Scott in the transportation of 20,000 men to the relief of the Army of the Cumberland. He enjoyed the rather unique distinction of being called to a Council of War in 1864. When he arrived in Washington, the Council was convened in Stanton's bedroom, where the latter lay sick. The War Secretary said on seeing him, "Is it possible that we waited for three days to get the opinion of that red-headed stripling?" The opinion given by the stripling was so conclusive, however, that the movement projected was not made. In 1864 he was appointed Superintendent of the eastern division of the Pennsylvania road; in 1873 he was made Superintendent of motive power. Soon afterward he became General Manager, and in this capacity he introduced the standard track, solid roadbed, the system of track inspection and the award of prizes for the best sections of track. He was a good disciplinarian, and the high grade of efficiency for which the Pennsylvania Railroad is noted is largely due to him. In 1882 he became the second Vice-President, and in 1897 he succeeded George B. Roberts as President of the road.

Mr. Thomson was a splendid example of what a bright young man can accomplish in America provided he has reasonable opportunities for the display of his talent.

TRADE WITH CUBA AND OUR NEW POSSESSIONS.

American producers are already finding an enlarged market in Cuba, Porto Rico, Hawaii, and the Philippines, as is shown by the figures of the Treasury Bureau of Statistics, which indicate that the exports of the fiscal year, which ends with the present month of June, will show a larger exportation to Hawaii and the Philippines than ever before, and larger to Cuba and Porto Rico than in any previous year, except those in which the reciprocity features of the McKinley law were in operation.

The total exports to Cuba, Porto Rico, Hawaii, and the Philippines in the full fiscal year will be about $30,000,000, against $17,000,000 last year. Our sales to these islands for the fiscal year 1899, even under the unsettled conditions which have prevailed in most of them, exceed those of any previous year, save those of 1893. Of course, these figures do not include any of the supplies sent by the government to any of its troops in the islands.

It is also interesting to know that the exportations to Spain are approaching their normal conditions; those for the ten months ending with May were $8,000,000, against $10,000,000 for the corresponding months of last year.

© 1899 SCIENTIFIC AMERICAN, INC.

A SIMPLE FASTENER FOR GATES.

A patent was recently granted to John F. Marcum and Godfrey Hauenstein, of Olds, Iowa, for a gate-fastening device so constructed that it automatically moves to its locking position as the gate closes.

Swinging on one gate-post is a locking yoke comprising two divergent plates secured to a rock-bar. To the upper end of this gate-post a segment-rack is secured having a notch at its central portion and stops at its ends. The top edge of the rack between the stops is inclined downwardly and outwardly. Pivoted to the

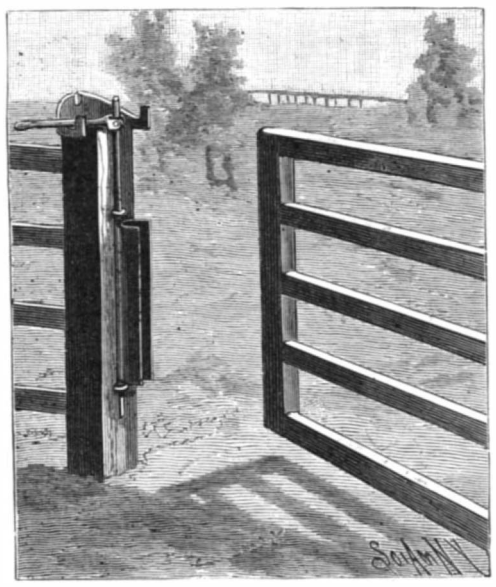

AUTOMATIC GATE-FASTENER.

upper end of the rock-bar is a latch-lever adapted to engage the central notch in the rack to hold the yoke in its locking position.

In opening the gate, the latch-lever is swung up to clear the notch. Then by pushing the gate in either direction the yoke will be rocked to release the gate. At this time the latch-lever will engage one of the stops at the end of the rack.

The gate when being swung to its closing position engages the yoke and automatically swings it to its locking position, the latch-lever being moved into the central notch of the rack.

By inclining the upper edge of the rack, the locking-yoke will be prevented from being swung to its closed position by force of wind or other slight pressure; because the latch-lever will frictionally engage the inclined edge.

AN IMPROVED ACETYLENE GENERATOR.

An efficient acetylene apparatus should neither undergenerate nor overgenerate gas. The carbide and water should be properly brought together, so that a steady flow of gas is obtained without regard to the number of jets in use. The carbide should be so decomposed that the production of heat is avoided; for hot acetylene has not only a low light-value, but its use is needlessly expensive. To meet these requirements, the Pan-American Acetylene Company, of Buffalo, N. Y., have devised an apparatus in which the defects encountered in many gas-machines seem to have been effectually overcome.

The apparatus in question, known as the "Northlight," has bottom water-feed generation, the principle

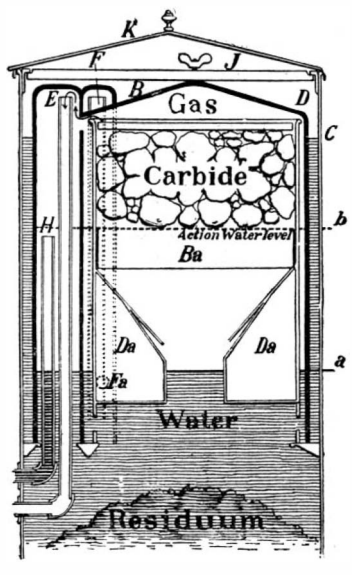

Fig. 2.—SECTION OF THE GENERATOR.

of which is well shown in Fig. 1, representing a miniature generator comprising tumblers inverted in a dish of water. The water in rising within the generator-glass touches the carbide. As soon as the gas thus produced has filled the pipes and apparatus, it forces back the water from the carbide, thereby stopping further generation.

In the actual apparatus, the generator (Fig. 2) consists of an outer casing inclosing a water-sealed gas-bell, *B*, in which there is a peculiar grate (omitted in the engraving) terminating in upward points which support the carbide in a free mass.

The bell, *B*, is formed with sleeves covering the receiving ends of the gas-pipes, *E* and *F*, and of the vent-pipe, *H*. The carbide having been placed upon its grating, water is poured into the outer casing to a certain height. The water in seeking its level rises within the bell, expels the air through the pipe, *H*, and finally comes into contact with the lower edge of the carbide. Gas is immediately generated and is conducted by the pipe. *E*, to the gasometer, and thence throughout the building. The residuum instantly clears itself from the carbide and falls down into the water below. The gas, in passing through the apparatus and distributing pipes then receives a check—assuming that the burners are not in use—and at once begins to push back on the water, forcing it away from the carbide, thus stopping further generation. As acetylene is then consumed at the burners, the pressure within the generator correspondingly decreases, permitting the water to rise again, as at first, into contact with the carbide to generate a fresh supply of gas. It is therefore evident that the generation is controlled merely by the pressure of the gas upon the water, the one acting automatically upon the other. The auxiliary gas-pipe, *F*, leading to the gasometer, is used only when the pressure is so great that the water is forced down below a secondary opening.

The various pipes shown on the exterior of the apparatus (Fig. 3) connect the generator with the gasometer, and comprise a system of traps or water-seals which prevent a back-flow of the gas.

In this apparatus it will be observed that a very small quantity of carbide is made to touch a very large sheet of water. The gas generated is therefore cool. It will be furthermore observed that the carbide is not surrounded by a mass of viscid, slaked lime, thereby preventing that imprisonment of the heat which forms so objectionable a feature in many machines. Incidentally, the fact that the generating chamber is surrounded by a belt of cool water further guards against the production of unnecessary heat. The value of the coolest possible generation is now recognized by

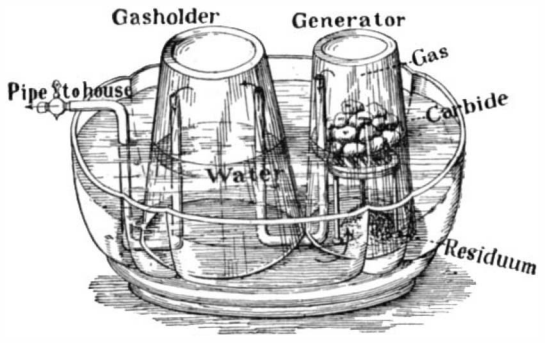

Fig. 1.—A MINIATURE BOTTOM-WATER FEED APPARATUS.

all authorities on acetylene, as heat causes the polymerization of the gas atoms with loss of lighting power.

The merits of the apparatus described earned for it the only gold medal for acetylene machines at the Trans-Mississippi Exposition.

AN AIR-CUSHION FLUID-PRESSURE REGULATOR.

The fluid pressure regulators most commonly in use employ a complicated mechanism composed of weights, levers, or metal springs, to procure the automatic regulation desired. A decided improvement on this form of regulator is to be found in a device made by Julian d'Esté & Company, Boston, Mass., which embodies in its construction a diaphragm acted upon at one side by the fluctuating fluid-pressure, and at the other side by a constant air-pressure.

The regulator consists of a casing, the interior of which is divided into two chambers by a flexible diaphragm. In the lower of these two chambers air is pumped through a convenient nipple, by means of an ordinary bicycle pump, until the desired pressure upon the lower side of the diaphragm is obtained. A spindle is attached to the diaphragm and carries at its upper end a double valve controlling a series of ports through which the fluid (such as steam, water, or the like) flows.

From this construction it follows that at its under side the diaphragm is subjected to a constant yielding air-pressure and at its upper side to the varying pressure of the fluid. When the pressure of the fluid passing through the ports in the upper chamber exceeds that of the air in the lower chamber, the diaphragm is depressed, thus causing the spindle to close the double valve above and to shut off the fluid. When the pressure has decreased and has sunk below that of the air in the lower chamber, the diaphragm will rise, thereby causing the double valve to open the ports which it controls in order to permit the passage of the fluid. The valve, it is evident, can be made to open or close automatically at any desired pressure by varying the pressure of the air in the lower chamber.

The air chamber, if so desired, may be placed in any convenient position and at any distance away, being connected by a pipe with the cover clamping the diaphragm in position. The filling-pipe of the air chamber may be brought down on the wall or supporting column to a convenient point with the fitting (with which the air pump is connected) on the end of it.

When used in libraries, schoolhouses, and office buildings, the air cushion regulator satisfies a want

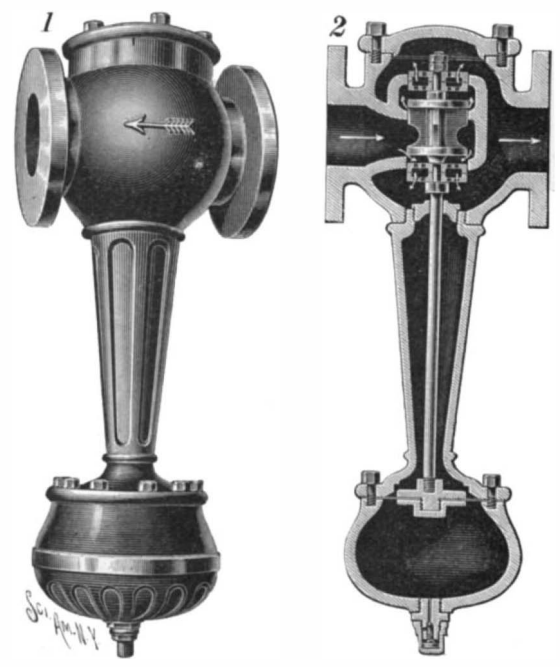

A SIMPLE PRESSURE REGULATOR.

long felt; for it reduces the high pressure steam now in common use for heating to very low pressure without making any sound whatever.

The Motion of a Perfect Liquid.

At a recent meeting of the Royal Institution Prof. H. S. Hele-Shaw dealt with the subject of "The Motion of a Perfect Liquid," says The Mechanical Engineer. There was no such thing in existence, he explained, as a perfect fluid, and actual liquids differed from it in the possession of several properties, particularly that of viscosity. Yet by virtue of this very property they could be made to flow in the manner of a perfect fluid if inclosed as a thin film between two plates. For this purpose increased viscosity in the liquid was an advantage, because it gave stability; thus the high viscosity of glycerine enabled it to be more effectually controlled than water. By using plates of glass and appropriate coloring matters, the lecturer proceeded to exhibit by the aid of the lantern a series of experiments elucidating the motions of an ideal liquid. He pointed out that the effects actually obtained in this way completely agreed with some of those which mathematical analysis had been able to work out, the films indeed not only affording a striking instance of mathematical prediction, but even offering solutions of problems whose complexity baffled

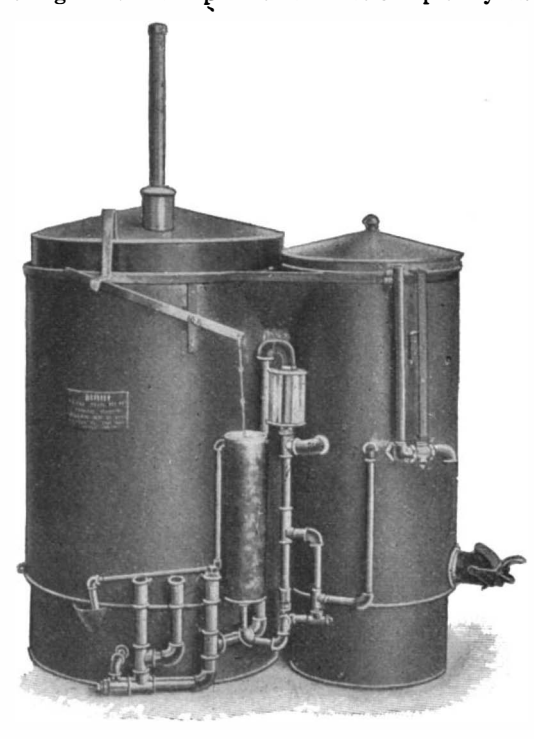

Fig. 3.—THE "NORTHLIGHT" ACETYLENE-GAS GENERATOR.

mathematicians except in a few simple cases. Prof. Hele-Shaw also showed how the liquid could be made to imitate the lines of magnetic and electric induction, and how, by altering the thickness of the film in places, the form of the stream lines could be changed to represent the altered resistance of a magnetic field, due to the presence of a paramagnetic or diamagnetic body.

© 1899 SCIENTIFIC AMERICAN, INC.

A REMARKABLE BRIDGE DISASTER.

We present two illustrations of a bridge disaster which recently occurred on the Belt Line branch of the Great Northern Railroad, where it crosses the Nemadji River, near Superior, Wisconsin. The Nemadji at this point flows through a shallow valley over which the railroad is carried at an elevation of about from 50 to 60 feet above the river. The crossing itself consists of a single track deck span of the combination type, with timber posts and top chord and steel bottom chord and diagonals. The approach at either end consists of trestle-work of the standard type, with pile foundations, and its whole length from bank to bank is about 1,200 feet, consisting first of 200 feet of trestle, then a combination truss of about 110 feet span followed by about 900 feet of trestle work across the bottom land.

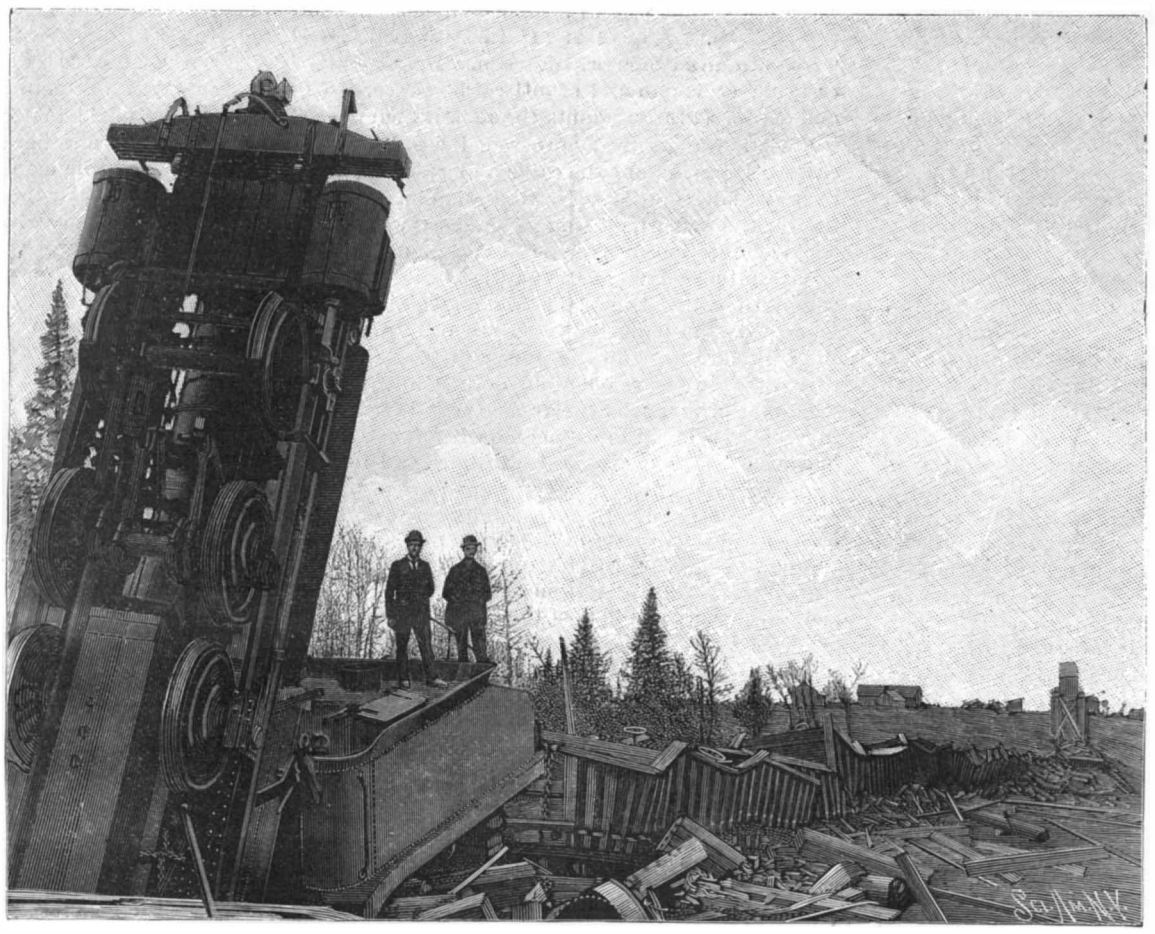

NEMADJI RIVER TRAIN WRECK—SHOWING FALLEN ENGINE AND TRAIN.

At the time of the accident a heavy ore train, consisting of several fully loaded ore cars, some box cars, a flat car, and a caboose, and drawn by one of the powerful freight engines of the company, was crossing the structure. The whole train with the exception of two box cars, the flat car, and caboose had passed over the river crossing, when the trestle collapsed at a point somewhat to the rear of the engine, and the whole train with the length of supporting trestle beneath it fell over in the direction of the center line of the structure and assumed the remarkable position shown in the two accompanying illustrations. It would appear that the locomotive was well clear of the dangerous point in the structure at the time it gave away, but that it was drawn backward by the weight of the falling train behind it. The tender assumed a fairly upright position, but the locomotive fell cab downward and was left standing on end as shown. The remarkable feature of the accident is that none of the cars and no part of the bridge fell either to the right or left, the whole structure pivoting forward and downward upon its foundation, the cars in many cases remaining upon the rails. The last two box cars, the flat car, and the caboose, remained on the truss above the river, the couplings fortunately breaking and preventing the end of the train from being drawn down into the general wreck.

While at first sight it would seem astonishing that the whole train with its supporting trestle should fall symmetrically forward and not as one might expect to either side, a brief study of the wreck as shown in the upper engraving will explain this phenomenon. It will be noticed that the superstructure, that is to say, the longitudinal stringers, cross-ties, and the track, is carried upon vertical "bents," which consist usually of heavy timbers twelve inches square, although in this case they are built up of 6 × 12 inch timbers spliced together. As a rule there are four timbers to each "bent," the two on the inside being generally vertical and those on the outside having a considerable amount of batter or inward inclination from the ground to the top cap, or transverse carrying piece. The supporting timbers are braced at intervals of about 16 feet of their height by horizontal timbers, and they are further "sway-braced" by diagonal 4 × 12 inch timbers, all the sticks at every point of intersection being firmly bolted together. Upon the ground each bent is carried upon a transverse 12 × 12 inch timber which either rests upon short pieces 6 × 12 inches by 3 feet in length, or is carried upon piles which are driven to a firm bearing in the ground.

It will be noticed that this construction, while it provides ample strength for carrying a vertical load and remarkable lateral rigidity insuring safety against overturning, depends for longitudinal stability mainly upon the superstructure, that is, the stringers, ties, and track; so that should the superstructure be broken through at any point, there is nothing to prevent the whole system of vertical bents from pivoting forward like a line of child's building blocks, and falling upon one another. As long as the superstructure remains intact, the longitudinal forces acting upon the bridge, such, for instance, as the forward thrust resulting from a sudden application of the brakes of a train, are transmitted through the floor system to the opposite abutment; but it is evident that a break at any point in the continuity of the floor imperils the stability in a longitudinal direction of the whole trestle, even if it should happen to be some thousands of feet in length.

The proper safeguard against an accident of this kind is to introduce longitudinal diagonal bracing, extending from the caps of the bents immediately below the floor system, down to the foundations. It is not necessary to insert these braces at every bent, for if they were introduced, say, at every fourth or sixth bent, the collapse of a portion of the bridge would be limited in its destructive effect to a certain stated length of the trestle, instead of, as now, involving the collapse of the whole structure. It will be noticed that in the case of the Nemadji bridge the wreck of the trestle to the rear of the train was prevented by the existence of the truss bridge across the river, whose piers, coupled with the inertia of the truss itself, offered sufficient resistance to longitudinal overturning.

NEMADJI RIVER TRAIN WRECK—LOOKING FORWARD FROM REAR OF TRAIN.

The Fall of Meteorites in British Central Africa.

A fine collection of meteorites has just been added to the Department of Minerals in the British Museum. It consists of four stones which were seen to fall on January 25 in the native villages on the eastern slopes of Mount Zombo, British Central Africa. Two of them weighed 14 and 17 ounces respectively and the other two 29 and 19 ounces. At Zomba a crash like thunder was heard and the reverberations lasted for a few minutes afterward and the detonation was heard at a place 90 miles distant. At one of the new villages the people were found squatting around the stone in a circle discussing the "miracle" as they termed it. None would approach the stone and it was still lying where it fell when the officials arrived. As far as it is at present known, the area over which the Zomba stones fell represented 9 miles long and about 3 miles wide. It is probable the larger number of stones may have reached the earth.

To Move Buildings in Budapest.

A Chicago company is to undertake modern building moving methods in Europe. This company has closed contracts for changing the location of nine structures in the city of Budapest, Hungary, where grading and reconstruction of the street system have been found necessary. The American system of building removal was unknown, but the government engineers began investigations which ended in American engineers being asked to bid on the moving of public and other structures.

© 1899 SCIENTIFIC AMERICAN, INC.

The Proper Reading Distance.

At a distance of several meters or yards, says Dr. Norburne B. Jenkins in The Medical Record, little or no muscular effort is required for the normal eye to see objects distinctly; but an extreme exertion of the ciliary muscle, which controls the crystalline lens, is necessary if the vision be directed to an object a few centimeters or half-inches distant from the eye. The following may illustrate the work of the muscles of the eye in reading at several distances: A sheet of paper about twenty centimeters (eight inches) square, printed with type sufficiently large to be easily read at five or six meters or yards, is placed at this distance from a person with normal or emmetropic eyes. Practically no contraction of the muscles of convergence or of the ciliary muscles is necessary in order to read the type. Should the paper be placed a meter or yard from the eyes, the ciliary muscles and the muscles controlling the motions of the eyeballs are called upon for additional work, but no inconvenience is occasioned to emmetropic eyes by prolonged vision at this distance. If the paper now be placed within a few centimeters or half-inches of the eyes, the ciliary muscles contract to their utmost. The internal recti likewise are in a state of extreme exertion in accomplishing the convergence necessary in order that both eyes may see the same type at the same instant. The muscles are no longer adequate to the increased tension. They become exhausted and vision is embarrassed. The type is alternately blurred and distinct, in consequence of the alternate failure and recovery of the muscles. Should this process continue for many minutes, pain and vertigo come on, and the sufferer is forced to direct his vision from the paper. The nearer objects approach the eyes, the greater will be the necessary muscular effort and the sooner will the muscles refuse to perform their functions; the farther the type is held from the eyes, the less is the requisite muscular effort; hence it is probable that the farthest point at which distinct reading-vision is possible is the proper distance for continuous reading. Probably this point is more than thirty-five centimeters (fourteen inches) distant from the eyes, and is dependent upon the strength of the muscles, habit, and the visual acuity.

The Development of Submarine Telegraphs.

The development of the submarine telegraph from a mere gutta percha coated wire laid in New York Harbor by Prof. Morse in 1842 to the great cables which now engirdle the entire earth except the bed of the Pacific is described in a statement just issued by the Treasury Bureau of Statistics, entitled "Chronology of Submarine Telegraph Construction throughout the World, and the Development of Submarine Telegraphy." This publication, which has been prepared by the Bureau of Statistics in view of the special interest just now developed in a submarine telegraph line to connect the United States with Hawaii, Guam, the Philippines, and the Asiatic coast, shows not only the location, number, and length of the submarine telegraphs of the world, but also the history of this great system and the part which American genius and enterprise have had in its development.

The statement credits Salva, a Spaniard, with the first recorded suggestion of submarine telegraphy, made before the Barcelona Academy of Sciences in 1795. Aldini, a nephew of Galvani, performed experiments in the transmission of electric signals under the sea near Calais, France, in 1803; Schilling ignited gunpowder by electricity transmitted through a subaqueous conducting wire under the Neva River near St. Petersburg in 1812; telegraph signals were transmitted through insulated wires under the River Hugli, in India, by the director of the East India Company's telegraph system in 1839; and in 1842 Prof. Morse transmitted electric currents and signals through an insulated copper wire laid for that purpose between Castle Garden and Governor's Island in New York Harbor, and in the following year suggested submarine electric communication between the United States and Europe. In 1845 Ezra Cornell, in conjunction with Prof. Morse, laid and successfully operated submarine copper wires in the Hudson River between New York and Fort Lee, and in 1847 a section of the telegraph line connecting New York and Washington was laid through the waters of a narrow creek by J. J. Craven, of New Jersey, thus demonstrating the practicability of actual submarine telegraphic service. In 1850 a submarine telegraph line was laid across the English Channel and signals exchanged, but without further success, though in the following year a cable containing four copper wires insulated with gutta percha and protected by galvanized iron wires wound spirally about it was laid across the English Channel and put into successful operation as a submarine telegraph line.

These experiments having proved the practicability of submarine telegraphy, the great enterprise of a telegraph line under the Atlantic Ocean was undertaken, and the subsequent developments are described in the statement as follows:

1857. First attempt to lay a submarine telegraphic cable across the Atlantic Ocean, the enterprise being headed by Cyrus W. Field, of New York, and Charles Bright, J. W. Brett and others, of England. The cable was to extend from Valentia, Ireland, to Newfoundland, the length of cable necessary being estimated at 2,500 miles. The construction of this cable was similar to that across the English Channel. After 255 miles had been laid from Valentia westward, the cable broke and the work was abandoned.

1858. Renewal by Mr. Field and his associates of the attempt to lay a submarine telegraphic cable across the Atlantic. The United States naval vessel "Niagara" and the British vessel "Agamemnon," carrying each one-half of the cable, proceeded to mid-ocean, and after joining the ends of their respective sections, on July 29, proceeded westward and eastward, paying out the cable and reaching their respective destinations, Newfoundland and Valentia, on the same day, August 5, 1858, when electrical connection between the continents was at once established over 2,050 nautical miles of cable which they had thus laid. Congratulatory messages were exchanged between the President of the United States and the Queen of England, and there was public rejoicing in both countries over what was pronounced the great event of the century. After less than one month of operation, however, the cable ceased working and it was never operated further, nor was any part of it ever recovered. During the time of its operation, 730 messages of about 10,000 words were passed over it. Its total cost was $1,256,250.

1859. A submarine telegraphic cable to connect England with British India was laid through the Red Sea and Arabian Sea to Kurrachee, India, having a total length of 3,043 nautical miles, but with several intermediate landings. Some portions of the line worked satisfactorily for thirty days, but few if any messages were sent over the entire length, and it soon proved a complete failure.

1860. Elaborate study of the entire subject of submarine telegraphs and the construction of cables was made by a committee appointed by the British Board of Trade, resulting in an expression of the belief that submarine telegraphy might, despite past failures, become successful and profitable if sufficient care were exercised in constructing, laying, and managing the cable.

1861. A submarine telegraphic cable, which had been manufactured with great care, was laid across the Mediterranean from Malta to Alexandria, Egypt, with intermediate landing places at Tripoli and Benghazi. The cable consisted of seven copper wires stranded together, covered with several coatings of gutta percha alternated with other non-conducting and waterproof material, and in turn covered and protected by eighteen iron wires wound spirally about this core. This cable proved a permanent success and went into general operation shortly after its construction. The speed of transmission, which on the Atlantic cable and shorter submarine lines had been three words per minute, was brought up to ten words per minute on each separate section, but was only three words per minute when all the sections were united and operated as a single line of 1,331 miles.

1862. A submarine cable which had been laid across the Mediterranean Sea between France and Algeria in 1861 proved a complete failure after a few months of experiment.

1864. Construction of a cable line to connect India with England undertaken by the Indian government, the line to be laid through the Arabian Sea and Persian Gulf to connect with land lines, thence to Calais, and by the short submarine line under the British Channel to England. The submerged line in the Arabian Sea and the Persian Gulf had a total length of 1,450 miles, but with three intermediate landing places. This line consisted of a copper core surrounded by layers of gutta percha, alternated with other non-conducting and waterproof material, being protected by an outer sheathing of twelve galvanized iron wires wound spirally about it, which in turn were protected by double wrappings of tarred hemp yarn. All of these materials and the various sections of the cable were constantly and thoroughly tested electrically and otherwise during its construction. The line when laid proved a complete success, becoming the first successful telegraphic connection between England and India.

1865. Another attempt made by Cyrus W. Field, of the United States, and his associates in the United States and England to lay a submarine telegraph cable from Valentia, Ireland, to Newfoundland and the United States. The cable, for which the contract price was $3,000,000, partly in cash and partly in shares of the company, consisted of seven copper wires surrounded by numerous coatings of gutta percha and other waterproof nonconductors. This was in turn surrounded by ten Bessemer steel wires, this being the first use of steel wires for cable protection, each wire being separately wound with pitch-soaked hemp yarn, the shore ends being also further protected by thirty-six heavy iron wires wound spirally about the completed cable. The steamer "Great Eastern," then the largest steamship afloat, was specially fitted up for laying this cable. Great care was exercised in every particular, but, after 1,186 miles had been laid westward from Valentia, the cable broke in water over 11,000 feet deep, and the attempts to recover it were unsuccessful.

1866. Mr. Field and his associates renewed their efforts to lay a cable across the Atlantic. A new company, with $3,000,000 capital, was formed, with the double purpose of attempting to find the end of the cable partially laid in 1865, and complete the line, and also to lay another cable parallel with and near to it. The cable manufactured for the proposed new line was similar to that of 1865. The "Great Eastern" was remodeled to further meet the requirements of the work, and left Valentia, Ireland, July 13, 1866, paying out the cable in a line about 25 miles north of that followed in the preceding year. She safely arrived at Newfoundland in fourteen days from the date of leaving Valentia, and electrical communication was immediately established between the United States and England, which has never since been more than temporarily interrupted. The "Great Eastern" then returned to the spot where the cable was lost in 1865, and, after eighteen days' work, succeeded in bringing the end on board from a depth of over 11,000 feet, the tests immediately made showing it to be in perfect working connection with the Valentia end. A splice was made and the laying of the line toward Newfoundland resumed, and on September 8 the cable was landed at that point and the second successful line of communication between the United States and Europe thus completed, Newfoundland being already in submarine telegraphic communication with the mainland and telegraph systems of the United States. The length between Trinity Bay, Newfoundland, and Valentia, Ireland, is given by the American Cyclopedia at 2,143 miles. The rate of speed in transmission over these cables was at the beginning eight words per minute, but increased to fifteen words per minute.

The success of the 1866 cables so completely demonstrated the practicability of submarine telegraphy that its progress thenceforward was very rapid. A second Anglo-Mediterranean line was laid from Malta to Alexandria in 1868, proving a complete success. A cable between France and Nova Scotia was laid in 1869, and another from Suez to Bombay, India. In 1871 a cable line was laid along the eastern coast of Asia to connect with land lines already constructed across Siberia and Russia. These land lines had been built shortly after the failure of the first Atlantic cable experiment, in the hope of connecting Europe and America by way of Siberia, Behring Straits, Alaska, British America, and the United States; but that plan becoming unnecessary after the success of the 1866 cable experiments, the land line across Russia and Siberia was utilized to connect a cable system of the eastern shore of Asia with the land and cable systems of Europe and America. In 1873 South America was connected by cable with the United States and thence with Europe; in 1875 cables were laid along the coast of Africa, connecting its important points with Europe and America; in 1880 cables were laid across the Gulf of Mexico and along the western coast of South America and connected by an overland line across the Isthmus of Panama. The invasion of the Pacific has been already begun by the construction of lines extending from Australia 1,200 miles southeastwardly to New Zealand and 800 miles northeastwardly to New Caledonia, but leaving the Pacific the one great body of water which has not yet been completely spanned by submarine telegraph wires. This it is believed is now practicable, since the distance between the four landing places now under the control of the United States, Hawaii, Wake Island, Guam, and the Philippines, is in each case less than that through which submarine cables are now being daily operated between France and the United States.

New Field for Fruit Preserving Machinery.

For some time past there has been considerable agitation going on in Jamaica as to the most practical way in which the surplus fruit and vegetables can be preserved for shipment. There is an excellent opportunity for those who have devices for evaporating or preserving fruit and vegetables to patent and introduce their machines into Jamaica and where there must shortly be an extensive demand for them.

Exhibition of Liquefied Hydrogen.

Great interest was exhibited at the Royal Institution, London, on June 7, when Prof. Dewar for the first time exhibited liquefied hydrogen to the public. He delivered a lecture on the subject and showed that the air surrounding the liquid was solidified like snow. Strange to say, cork placed in the liquid sank like a stone.

© 1899 SCIENTIFIC AMERICAN, INC.

Correspondence.

Chain and Sprocket Problem.

To the Editor of the SCIENTIFIC AMERICAN:

As the theory of the movement of a bicycle is being gradually introduced into text books on mechanics and discussed in mathematical journals, it is interesting to know whether certain results of mathematical investigation in this direction might be of practical value to the constructor. In this communication no reference shall be made to the dynamical laws governing the motion of a bicycle, but I shall submit for practical consideration the arithmetical solution of a problem which is connected with the sprockets and chain of a bicycle, and which may be stated as follows:

What must be the relation between the number of teeth of the sprockets and the number of links of the chain in order to have a continuous change between the teeth of the sprockets and the links of the chain?

To make the problem clear, consider a tooth A_m of the front sprocket and a tooth B_n of the rear sprocket which are connected with the links a_m and b_n of the chain respectively (m and n designate the orders of the teeth in counting). In a similar manner let A_{m-1}, B_{n-1}, a_{m-1}, b_{n-1} be the teeth and links next to the previous teeth and links in the opposite direction of the motion of the teeth and links. Now let the chain describe a complete revolution. What must be the relation between the number of teeth and links, so that after a complete revolution of the chain the links a_{m-1} and b_{n-1} will be applied to the teeth A_m and B_n respectively? To answer this question let m and n be the number of teeth of the rear and front sprocket respectively, and c the number of links of the chain.

If c is divisible by m and n the problem cannot be solved, since the same link will always be applied to the same tooth. The conditions of the problem are evidently

$$(1)\quad ma + 1 = c$$
$$(2)\quad nb + 1 = c$$

where a and b are two integral numbers to be determined. The co-existence of these conditions gives the required relation—

$$(3)\quad ma = nb, \text{ or } \frac{n}{m} = \frac{a}{b}$$

i. e., the two integral numbers a and b must be proportional to the numbers m and n respectively. As an example, suppose that the front sprocket has 27 and the rear sprocket 9 teeth. Then $\frac{27}{9} = \frac{b}{a} = \frac{6}{2}$, assuming $a = 2$ and $b = 6$, the number of links, according to (1) and (2),

$$c = 27 \,.\, 2 + 1 = 9 \,.\, 6 + 1 = 55.$$

In this case the gear would be (28-inch wheel)

$$\frac{27}{9} \,.\, 28 = 84.$$

During a complete revolution of the chain the front sprocket makes $2\frac{1}{7}$ revolutions and the rear sprocket $6\frac{1}{9}$ revolutions, so that during the second and every successive revolution of the chain every link is applied to a tooth next to the tooth in the previous revolution. A great number of other possibilities and extensions of the original problem might be added, but the foregoing example is sufficient to illustrate its value. The condition implied by equations (1) and (2) is seldom realized in the driving mechanism of a bicycle. Take, for instance, the data of a real case, where $m = 24$, $n = g$ and $C = 56$. It is impossible to find two numbers a and b, so that

$$24 \,.\, a + 1 = 56, \text{ and } 9 \,.\, b + 1 = 56.$$

The practical advantage of the arrangement of the number of teeth and links, according to the condition named above, seems to lie in the fact that by constant interchanging of teeth and links driving the motion the movement and wearing of sprockets and chain becomes more uniform. It would be interesting to know what practical bicycle builders think of such an improvement, and how much importance they attach to my proposition.

ARNOLD EMCH, Ph.D.,
Professor of Graphic Mathematics.

Kansas State Agricultural College, June 6, 1899.

A Hydrogen Experiment.

To the Editor of the SCIENTIFIC AMERICAN:

In Storer and Lindsay's Elementary Manual of Chemistry, page 43, we find the following experiment:

"Support a rather wide tube of thin glass—the neck of a broken retort, for example—in a vertical position, and connect the upper opening with a gas holder containing hydrogen. Allow the gas to flow until the tube is filled; then apply a lighted match to the mouth of the tube, and regulate the flow of gas so that the latter may continue to burn slowly at the lower edge of the tube.

"With a second gas holder containing oxygen, connect a piece of narrow gas tubing drawn out to a fine point; and, while the oxygen is flowing through this tube, pass it up into the larger tube filled with hydrogen. As the stream of oxygen passes through the burning hydrogen at the bottom of the vertical tube, it takes fire, and afterward continues to burn in the atmosphere of hydrogen within the tube. Care must be taken that no mixture of hydrogen and oxygen shall accidentally accumulate in the tube."

The members of my chemistry class decided to put this matter to a test and determine, if possible, whether it was the oxygen burning in the atmosphere of hydrogen, or whether it was the hydrogen that was really burning while the oxygen supported the combustion. At first a glass tubing was used to convey the oxygen gas into the atmosphere of hydrogen, which appeared precisely as though the oxygen were burning and gave a very yellow flame, due, of course, to the sodium in the glass. Next a platinum tube was substituted for the glass tube and the operation repeated in a darkened room, when a dark zone could be readily distinguished in the center of the flame, surrounded by the typical blue, almost invisible hydrogen flame, which we think proves conclusively that the hydrogen burns around the outside of the escaping oxygen, and that the oxygen furnishes or supports the combustion, and that the oxygen itself does not burn.

CHARLES W. RANDALL, M.S.

[It is usual to call hydrogen a combustible and oxygen a supporter of combustion; but the usage is a convenience simply. Both are consumed in combustion. Neither of these could be set on fire in a gas with which it would not combine. The language of the experiment quoted is much abler than the text book from which our correspondent quotes it. We do not consider the point involved of much practical consequence. —ED.]

He Welcomes the Trusts.

A correspondent of The Age of Steel writes: Among my valued acquaintances here in the East is a gentleman who has the distinction of being a much-sought and reliable public accountant. He is, in fact, one of the most expert in the profession. I met him the other day rushing down Broadway to catch a train. "Busy! Well, I should say so," said he in reply to my salutation. "Run to death by trusts; can't begin to keep up with calls; wish there were fourteen days in each week. Why? I get paid $25 to $50 per day to go through the books of concerns going into trusts, because the trusts won't buy a concern on its own representation of its condition, and I am called in. My charges don't cut any ice in the matter at all; it is a correct statement they want.

"And this isn't the best part of it either, for the capitalization of these trusts represents fully 50 per cent of water. The absolute cash value, shown by my reports, is usually covered by the preferred, guaranteed, dividend-paying bonds, and these bonds are taken by those inside the trusts, and the stock, which is usually all water, is sold to the dear public. Now, it won't take long for the public to get its eye teeth cut, and to wake up to the fact that they have tackled the wrong end of the mule, and that they need not even hope for dividends. Then there will be some high and lofty kicking and an accounting will be demanded, and then I will be again called in. Oh, I tell you these trusts are a great thing, and I catch them both coming and going. But let me tell you something, my dear boy, sub rosa, you know—don't buy any stock in a trust."

Meeting of the Association of Agricultural Chemists.

The Sixteenth Annual Meeting of the Association of Official Agricultural Chemists will be held in San Francisco, Cal., beginning July 5. Arrangements have been perfected by which members will receive substantial reduction on the railroads and at hotels, and interesting excursions have been planned. The agricultural industries of California are of such enormous importance that probably no other locality could be selected which would answer better as a place of meeting. Dr. H. W. Wiley, Chief Chemist of the United States Department of Agriculture, is the Secretary of the Association of Official Agricultural Chemists.

Removal of the Reservoir.

The actual work of tearing down the old reservoir for the New York Library, on Fifth Avenue, between 40th and 42d Streets, was begun on June 7. The debris in the interior of the reservoir, which has not been used for some time, will be first removed, and the destruction of the walls will soon begin. There are 110,000 cubic yards of stone work to be removed. The contractor will receive $105,000 for the removal of the stonework, and the remainder of the $378,000 which the contractor is to receive will be for the construction of the foundation for the new Library.

AN Automobile Show will be opened on June 17, at Richmond, near London, by Prince Edward of Saxe-Weimar. There will be tests of hill climbing and races between fast trotting horses and automobiles. An American company is about to establish a motor carriage factory at Coventry. It is possible that an automobile race will be held between New York and Chicago, between M. Charron, the winner of the French automobile race, and the inventor of the Winton machine.

Science Notes.

A Cincinnati physician has been making practical tests in cigar factories on the eye of the employes. The test is to discover the effect upon the eyes of persons addicted to excessive smoking, also to see what effect the fumes of tobacco in factories have on the sight. He also intends to examine the eyes of letter carriers and others with reference to the effect of smoking on the eyes.

The Sydney, Australia, cycle track has been lighted in a novel way, by means of inverted arc lights. Fifty-five arc lights and seventy incandescents are placed around the track at intervals of thirty-five feet, the lamps being inverted with the reflectors immediately over the arc. There are absolutely no shadows cast, and leading cyclists are of the opinion that it is safer to ride at night under this light than by daylight.

A curious event recently occurred in Oklahoma. The village of Mountain View, Oklahoma, was organized in a day. A rival town existed about a mile and a half west, and it was deemed advisable to consolidate it with Mountain View. The rival, "Oakdale," was purchased entire, for $34,380, and is now being transported to Mountain View. This is probably the first instance where one town was bought out and moved en masse.

In 1854 the "New World" of the People's Line made a record for the run between New York and Albany which has never been equaled, the time being six hours and twenty minutes. The "Adirondack" recently made the trip in six hours and forty-four minutes. The first Hudson River steamer, Fulton's "Clermont," required thirty-two hours to make the run from New York to Albany in 1807. In 1817 the "Chancellor Livingston" made the run in eighteen hours. In 1837 the "Rochester" made a record of ten hours and one minute. In 1860 the "Drew" made the trip in six hours and fifty minutes.

Prof. Moritz has investigated the conditions necessary for the absorption of drugs, and finds that medicaments are absorbed most speedily when taken with plain water while fasting. Soup, milk, wine, etc., retard absorption, even when the medicine is taken fasting, but absorption is still more slow when the medicament is taken with liquid after food, and most slowly of all when taken after food in the absence of liquid. To secure the most speedy absorption of any drug, therefore, it should be administered with water on an empty stomach, and in many cases it will be found that a definite effect will thus be produced, though no effect would be perceptible if the same dose were administered shortly after food.—Münch med. Woch., 45, 1521.

Of late years much attention has been paid to the subject of color blindness among railway employes, but acuteness of hearing has not been equally well observed. The New York Medical Journal quotes Dr. Stein, who has examined forty-four firemen and thirty-eight engine drivers, and finds only three out of the whole number to possess perfectly normal hearing power. He finds, however, by frequent excursions on locomotives that these employes hear sound signals under favorable circumstances, except those of the whistle. Nevertheless, he thinks there should be an established or minimum standard of requirements as to hearing. These views are the result of Continental experiments, and it would be interesting to know what the figures would be as regards the hearing of railway employes in the United States.

"That there is something more serious than the mere wound in the bite even of a healthy animal," says Appleton's Popular Science Monthly, January, "is attested by Mr. Pagin Thornton. . . . 'And what is more surprising to me,' he says, 'is that some of us may have hands crippled for some time from bites of a man's teeth.' Dog bites are always dangerous, but largely from the size of the wound which a dog biting in earnest will inflict. With men they usually fail to do their best. Animals recover from wounds more easily than men do; but Lord Ebrington says that deer bitten by dogs in Exmoor hardly ever recover. Much of the poisoning caused by bites is supposed to be due to the state of the animal's teeth; and in this way the bite of a herbivorous animal, whose teeth are usually soiled, may cause worse after-effects than that of a carnivora, whose wet mouth and wet tongue keep its teeth fairly clean. A similar difference is observable in the effects of being clawed and bitten by carnivora. Wounds made by the claws of leopards are poisonous, while those caused by the teeth are rarely septic. The force with which a bite in earnest is inflicted is an important element in its dangerous character. 'It seems,' says The London Spectator, 'as if for the moment the animal threw all its force into the combination of muscular action which we call a "bite." In most cases the mere shock of impact, as the beast hurls itself on its enemy, is entirely demoralizing, or inflicts physical injury. A muzzled mastiff will hurl a man to the ground in the effort to fasten its teeth in his throat or shoulder. Then the driving and crushing force of the jaw muscles is astonishing.'"

© 1899 SCIENTIFIC AMERICAN, INC.

A LARGE STATIC MACHINE FOR X-RAY WORK.

BY FRANCIS H. WILLIAMS, M.D., BOSTON.

There are many forms of apparatus for exciting vacuum tubes to generate X-rays, and doubtless we are soon to have simpler exciters than a large static machine. I planned this one because I felt satisfied that it would answer my purpose in making X-ray examinations in diseases of the chest until a more efficient form of apparatus was devised. I have also a coil which gives a steady light, but is less powerful than this machine.

The machine is in a dark room inclosed in a wooden case, supported two inches above the floor on glass blocks. The case is 8 feet long, 7½ feet high, and 3 feet wide.

Fig. 4 shows my method of making X-ray examinations, the curtain which ordinarily hides the static machine from view being drawn aside to show one end of the machine. Over the patient are two cords, one of which controls a brass rod that short-circuits the machine, throwing the Crookes tube out of the circuit, while the other controls the amount of light. The fluorescent screen on which the X-ray picture is formed is seen on the chest of the patient.

Fig. 2 shows the machine with most of the front of the case removed. The house officer on the right of the picture suggests the proportions of the machine. For convenience, the terminal on the right is extended by a brass rod to a brass ball (hung on a wooden rod) near the middle of the machine; this brings the terminals nearer together. The condensers are covered on the outside on the bottom only.

The machine has four revolving clean plate glass circles 6 feet in diameter and ¼ inch thick and four fixed glass circles 6 feet 4 inches in diameter; it is run by a one horse power motor through a countershaft, and it has a speed controller, which is essential, for by its means the number of revolutions per minute of the plates may be varied from 50 to 275.

A small influence machine, with a single revolving plate, not shown in the figure, 2 feet in diameter, fastened to the inside of the case, is used to excite the larger machine. There are two electric heaters inside the case which may be used if necessary to warm the air when it contains a very large percentage of moisture. These are preferred to the use of chloride of calcium.

The revolving glass plates are attached to the shaft

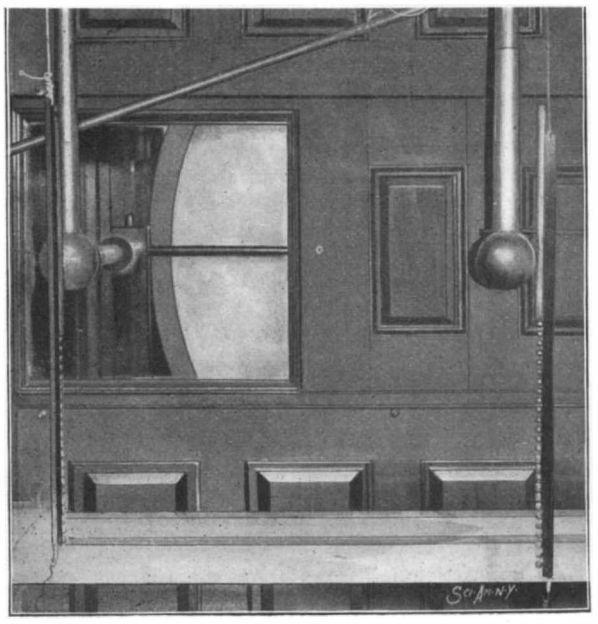

Fig. 1.—DETAILS OF ADJUSTABLE MULTIPLE SPARK-GAP.

by two cast-iron hubs one foot in diameter, each of which is made in three pieces. The center section of each hub is a disk which is loose on the shaft and serves as a separator between the two glass plates; the inner disks, which are contiguous to each other, are fast upon the shaft, while the outer disks are tightened against the glass plates by means of large nuts threaded on the shaft.

Perfect steadiness in the light from the tube is necessary, but when a long spark gap is used the light is unsteady, and this variability makes careful examinations with the fluorescent screen impossible. The long spark gap is also noisy. To overcome the lack of steadiness in the light, I devised what I have called an adjustable multiple spark gap. It consists of hollow brass balls ½ inch in diameter fastened ⅛ of an inch apart along the edge of a ¼ inch strip of vulcanite, Fig. 1, and this strip, with its balls, is free to move up and down through a vertical brass tube, which has a slot ¼ of an inch wide running its whole length; there are two such spark gaps, one on each terminal. When the electricity is turned on, a discharge is seen to go from one small ball to the next. These spark gaps are controlled by the cord seen hanging in the left of the picture, Fig. 4, nearly over the patient's head. By means of this cord, the row of balls and the tubes may be lowered or raised, and thus many or few of the short spark gaps may be brought into the circuit, and, consequently, much or little light be produced. Thus while examining the patient the light may be readily adapted to the needs of the case. This power of regulating the light is of prime importance in examining the heart and lungs. The light may be varied by changing the speed of the machine, but more readily by changing the spark gap, as just described.

The Crookes tube is placed in a closed box in order to prevent its light from brightening the room.

The other cord over the patient is used to raise or lower the brass rod which connects the terminals with the machine, and by this device the Crookes tube is thrown in or out of the circuit and shuts off as soon as the examination is over. The tube should be about three feet away from the patient. A thin screen of aluminum, not shown in the cuts, which should be grounded, should always be placed between the tube and the patient. There need be no fear of any burn, or inconvenience even, from X-ray examinations if simple precautions are taken. In about 3,000 examinations made at the Boston City Hospital I have seen no harmful effects produced.

No account of X-ray apparatus should be given with-

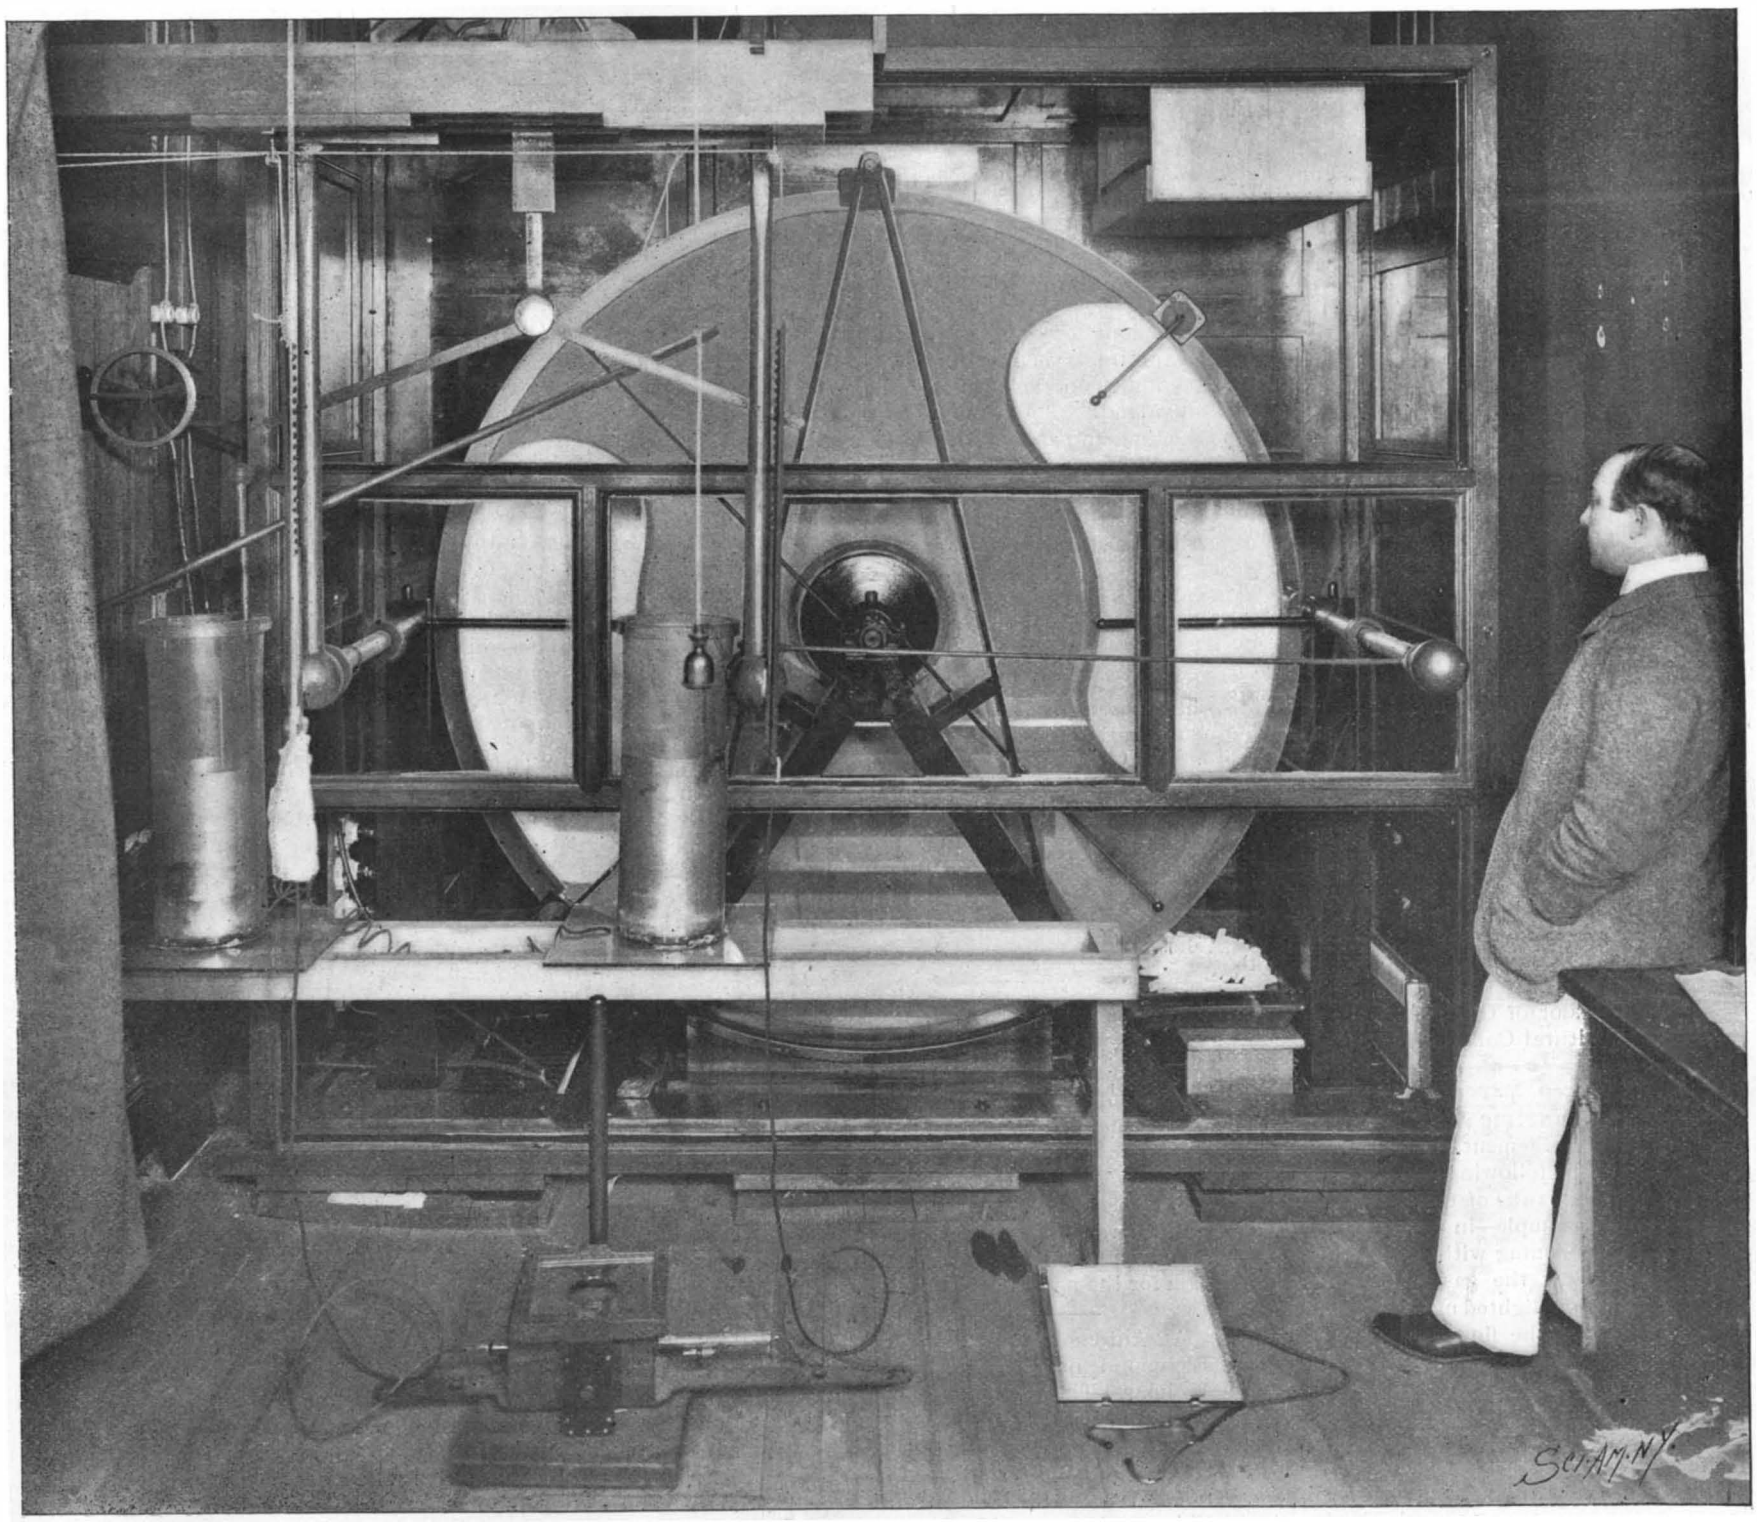

Fig. 2.—MAMMOTH STATIC MACHINE FOR X-RAY WORK.

Diameter of revolving plates, 6 feet; of fixed plates, 6 feet 4 inches.

© 1899 SCIENTIFIC AMERICAN, INC.

out referring to the investigations of Dr. William H. Rollins on vacuum tubes. One of the chief obstacles to practical X-ray work has been the inability to control the vacuum in the tube and to lower it when it became too high. This difficulty has been overcome by Dr. Rollins and others.

Three years or more ago, when the X-rays first came into use, it was a question whether pulmonary tuberculosis would give any indications of its presence in any stage. The examination of a few patients soon answered this question in the affirmative, and then the point arose as to how early signs would be obtained by the means of the Roentgen light. Experience has shown that slight abnormality even of the lungs is seen, and that by the aid of the X-rays, together with the usual methods of examination, the diagnosis of pulmonary tuberculosis may be made at an early stage. When we appreciate that in Massachusetts out of ten persons dying between the ages of twenty and thirty-six, six die of consumption, it is evident that this new method of examination will be of value.

There are in the minds of many two misconceptions in regard to the way in which the X-ray assists the physician in pulmonary tuberculosis. The first is that the "germs of consumption" can be seen, and second that they can be killed by the X-rays. We do not see by means of the X-rays the tubercle bacilli; they are microscopic objects which require a lens of very high magnifying power to make them visible, and even then this is only possible after they have been stained with an aniline color. Neither do the rays kill the "germs of consumption," nor, so far as our knowledge goes, have they any action upon them. The advances made by this method of examination are due to the fact that we can in one or both of the following ways. namely, by means of the darkened lung and the shortened excursion of the diaphragm, detect in many cases that the lungs are in an abnormal condition earlier than by other means. To appreciate this point it must be understood in the first place that the lungs in health, being filled with air, allow the X-rays to pass readily and therefore this portion of the chest is bright on the fluorescent screen; but when diseased they become more solid and obstruct the rays, and a shadow of the diseased part is thrown upon the screen. Second, during deep inspiration the diaphragm in health moves up and down through a certain distance; in disease the excursion may be lessened, and this diminished movement is seen upon the screen.

It is of great importance in heart disease to know accurately the size of this organ, and the X-rays give us more exact information on this point than we have hitherto been able to obtain. The heart may be smaller, or, as is more frequently the case, larger than it should be. The enlargement may be the result of inefficient action of the valves or it may be due to quite other causes, but whatever its origin there is nothing more important for the physician to know in many patients than its size, and the X-ray examination, as just stated, enables us to ascertain this more accurately than ever before. When it becomes customary to examine the chest with the X-rays, deaths from heart failure without previous warning will be less common. If the arteries or kidneys are diseased, the size of the heart is affected, and an enlarged heart may therefore suggest these complications. We can not only determine the size of the heart by the rays, but we can also follow its movements in health and disease by these means; and this has not been possible before.

In other diseases of the chest X-ray examinations are of value; for instance, tumors and fluid may be recognized in the chest.

The size and movements of the stomach may be followed under certain conditions, and these examinations may be of service in determining deformities of the pelvis. Many, though not all, stones in the kidneys or bladder can be recognized. We may also distinguish by the rays between gout and rheumatism, and they are also useful to surgeons in cases of fracture, in dislocations, and diseases of bones, and in locating bullets and some other foreign bodies.

To make X-ray examinations, training is needed in two directions; the problems connected with the apparatus must be understood in order to get the best results, and a large medical experience must be at command in order to interpret what is seen on the fluorescent screen and correlate it with evidence obtained in other ways.

One word of warning in regard to X-ray examinations; it should be clearly understood that this new method is only one of many which may be used by medical men to determine from what disease a patient is suffering; but in many cases (especially in diseases of the chest) it is capable of giving valuable evidence, which by itself, or in connection with other signs and symptoms, serves to point out the disease.

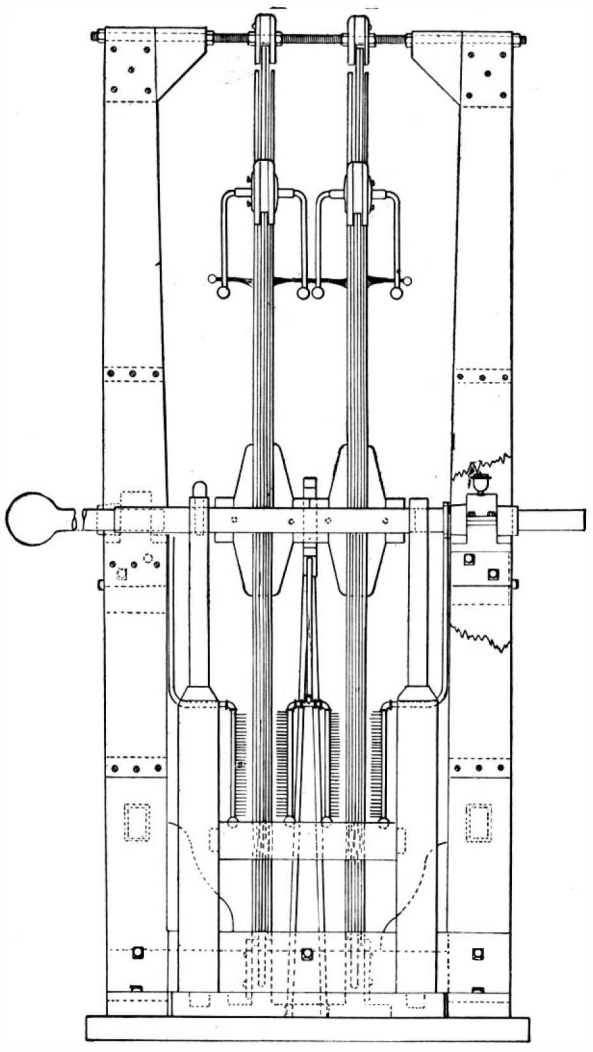

Fig. 3.—END ELEVATION.

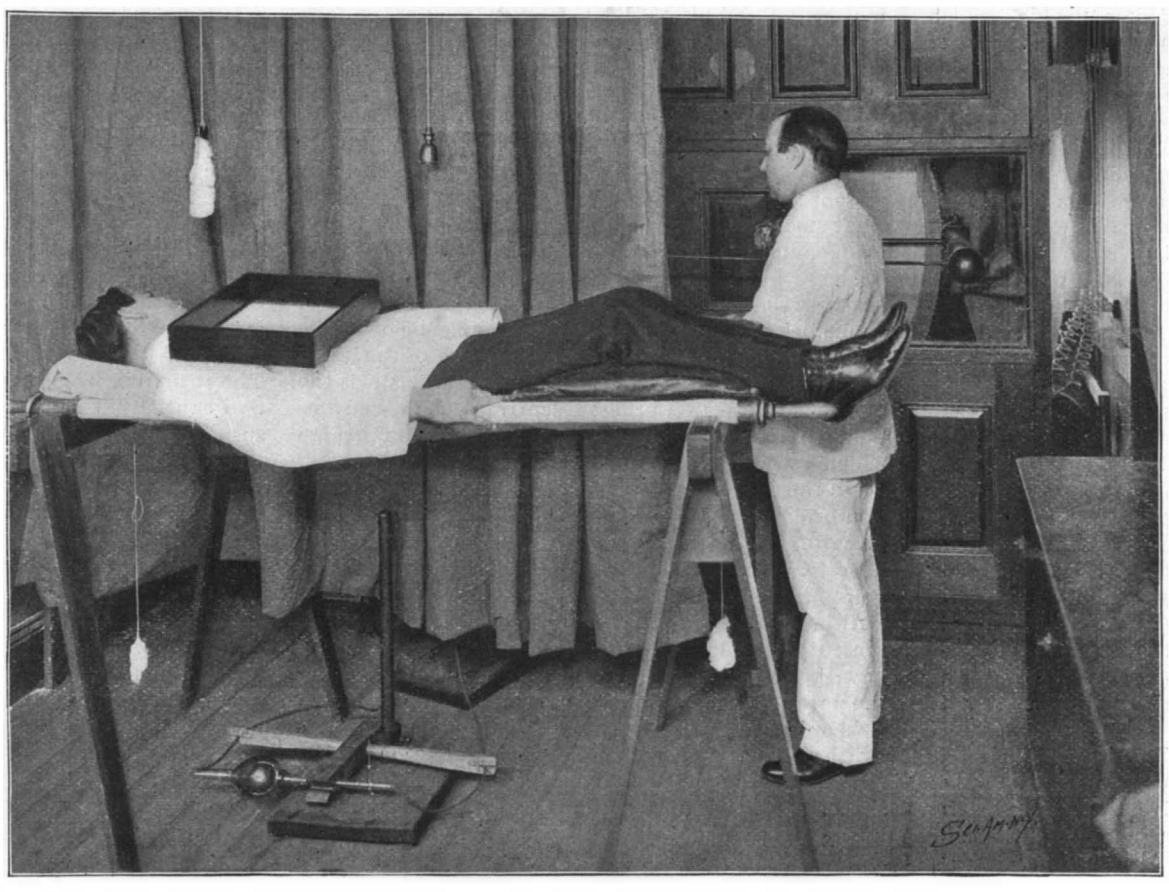

Fig. 4.—METHOD OF MAKING X-RAY EXAMINATION.

The Uganda Railroad.

The British government has just completed 300 miles of the Uganda Railroad. The total length of the route from Mombasa on the Indian Ocean to the northeast coast of Victoria Nyanza is 650 miles; nearly half of the entire road, which is to connect the sea with Uganda, is practically completed. Uganda is one of the most populous and promising parts of Africa, stretching far along the northern and northwestern sides of the second largest fresh water lake in the world. The New York Sun recently gave some interesting particulars regarding this road, from which we glean the following: The railway has been pushed toward the lake, which is the objective point, for the past three years in spite of such serious obstacles as the abnormal rainfall of 1897, which retarded the preparation of the roadbed, and the breaking out of the plague in India. In the first 200 miles the conditions for railroad making were very unfavorable.

There are very few spots where water may be obtained. Last August, when the line was about 200 miles on its way, it had only just emerged from the difficult jungle country. On March 31 of this year the line reached 279 miles, touching the densely populated country southeast of Kenia. It is believed that the railroad will now have an appreciable effect on the export trade. Since August 20 of last year trains have run regularly over most of the route completed at that time; the stations on the way number thirteen. Two trains start every day, one from the coast and the other from the inland terminus; the trains stop for the night. Deducting all the time spent at way stations and in obtaining water, the actual traveling time for the 162 miles is ten and one-quarter hours. This is not very high speed, but is a great improvement over caravan traveling. Only mixed trains carrying freight as well as passengers are now running. The fares for the 162 miles are $20, $10, and $1.70. The latter is for third-class travel and is confined to native and Indian patronage.

Of the financial prospect of the line it is not easy to speak at present, but, unless there are some untoward circumstances, the government will reap much indirect profit from the road. It has been spending $200,000 a year merely for the transport of the material needed by its agents and stations in the lake region. It is estimated that the railroad will reduce this charge to $30,000 a year. The transportation of the steamboat which the government sent to Lake Victoria Nyanza cost $100,000, and it could have been sent by rail for one-fifth of this sum.

Prof. Lanier on the Combustion of Magnesium.

Herr A. Lanier, in the Correspondenz, calls attention to the advantage of reducing the smoke of the flash mixture to a minimum by using an oxidant which itself yields no smoke, nitrate of ammonia being mentioned. Owing, however, to the extremely hygroscopic nature of this substance, some care is required. The salt must be fused to expel moisture; as soon as sufficiently cooled it is finely powdered, and preserved in a well-closed bottle. Various sensitometric determinations were made, and it was found that a mixture of 2 parts of magnesium and 1 of ammonium nitrate gave the same illumination as a mixture of 1 part of magnesium and ¾ part of potassium permanganate. Equal parts of magnesium and ammonium nitrate showed 2·4 times the actinic power of a mixture in which 3 of magnesium and 1 of ammonium nitrate were used. From the point of view of reducing smoke, the use of ammonium nitrate is of very great value, as far less magnesium will serve than when the metal is burned without any addition. Five grains was found to be ample for a fully exposed carte portrait in an ordinary room, and after five exposures the smoke was scarcely noticeable. To ignite the mixture, Herr Lanier places it upon a tuft of pyroxyline or a pad of touch paper (soft paper soaked in a solution of niter and dried). A taper on the end of a light wand may then be used conveniently. He sums up the following as the essential matters in using the magnesium flash with a minimum of smoke: (1) complete dryness of the materials; (2) an extremely fine state of division; (3) complete mixture—each charge being mixed separately with a feather on a sheet of paper; (4) the use of a base of pyroxyline or touch paper.

Victorium.

At the conversazione of the British Royal Society on May 3, information was given by Sir William Crookes of the discovery of what he believed to be a new element. In his work on the fractionation of yttria, he found in a photograph of a spectrum not visible to the eye a group of lines indicating a new element. In honor of the eightieth birthday of the Queen he has proposed to call it victorium. Its atomic weight is probably near 117.

© 1899 SCIENTIFIC AMERICAN, INC.

THE CUP CHALLENGER "SHAMROCK."

English yachtsmen, as represented in Sir Thomas Lipton, evidently do not believe greatly in the old adage which tells us that one should not "swap horses in crossing a stream," for at the very climax of their plucky attempts to regain the "America" cup, and just when their yachts are proving to be very dangerous competitors, we find them substituting a new designer in place of G. L. Watson, who turned out the "Valkyries," famous in the later history of the "America" cup races.

Among the better known British designers of yachts there are two who stand out pre-eminently in the production of successful racing machines. Expert opinion is divided as to the respective abilities of G. L. Watson and William Fife, Jr., the designer of the "Shamrock," although the former is better known to the general public on both sides of the Atlantic, because of the large number of racing yachts of the larger size, 80 to 90-footers, which he has produced. Fife has made his reputation chiefly in the smaller classes, some of his boats having proved to be all but unbeatable. His first attempt at a large craft was made in 1893, that banner year in international yacht racing, when he designed the "Calluna," an 80-foot cutter, for a syndicate of yachtsmen. She was not a success, and scored only one or two firsts in the whole of that season, being easily beaten by the American centerboard sloop "Navahoe." Fife's next attempt was the "Ailsa," a big 149-ton cutter, which made her debut in the Mediterranean in the spring of 1895, and created quite a sensation by beating the "Britannia," "Satanita," and other crack vessels by handsome margins. It had been agreed between the New York Yacht Club and Lord Dunraven, for whom the challenger, "Valkyrie III.," was at the time being built, that he should have the option of substituting any faster yacht, which might prove its superiority to his new boat, and bring her over to race for the cup, and it was for awhile confidently expected that the "Ailsa" would prove to be the boat selected. She did not, however, fulfill her first promise, and was completely worsted by the three-year-old "Britannia," during the 1895 season, with the result that she was regarded as being only something less of a failure than the "Calluna." At the close of the season, Fife took the yacht in hand again and made changes to such good effect that in subsequent seasons she easily disposed of the other big yachts of her date and scored a brilliant series of victories. Another famous Fife boat in the larger classes was the 65-footer "Isolde," which, under the captaincy of Hogarth, who has been selected as the captain of the "Shamrock," achieved one of the most brilliant reputations ever made by an English yacht, winning in four successive seasons 180 firsts, 95 seconds, and about $20,000 worth of prizes.

"VALKYRIE III." AND "SHAMROCK" COMPARED.

	"Valkyrie III."	"Shamrock."
Length over all	130 ft.	132 ft. 2 in.
Waterline length	88 ft. 10 3/16 in.	89 ft. 6 in.
Beam	26 ft. 2 in.	24 ft. 6 in.
Draught	20 ft.	20 ft.
Displacement	158 tons.	147 tons.
Sail area	13,026 sq. ft.	14,125 sq. ft.
Construction	Steel and wood.	Nickel steel, and manganese bronze.

We have deferred publishing any data regarding the "Shamrock" until we were in a position to secure it from a reliable source, and we are now enabled to present a sheer plan and midship section of the challenger, with her leading dimensions. If the drawings are compared with those of the "Columbia," which appeared in the SCIENTIFIC AMERICAN of March 18, 1899, it will be seen that there is a striking general resemblance between the two yachts. The waterline length, 89 feet 6 inches, is the same, both boats being built up to the allowable limit of 90 feet, with half a foot allowance for change of trim and possible variation of the actual from the calculated displacement. Both boats have the same draught of 20 feet. The "Shamrock" has a few inches more beam and is about a foot longer over all. In sail area the "Shamrock" will have a slight advantage, although this is necessarily a variable quantity in both boats, and may be enlarged or reduced (probably the former) when they are in the course of "tuning up." A considerable addition was made to "Defender's" sail area after her first few trials under canvas.

A comparison of "Shamrock" with "Valkyrie III." shows that she should be a faster boat. Not only is her model finer and easier to drive through the water, but she is considerably lighter as the result of the materials used in her construction. Although her displacement is several tons less than that of "Valkyrie III.," her sail-spread is greater. This results chiefly from the lightness of her hull, which weighs probably from seven to ten tons less than that of the "Valkyrie III." The weight saved in the hull can be put into the keel, where it adds immensely to the sail-carrying capacity. A reduction of nearly 2 feet in the beam, coupled with an addition of about a foot to the waterline length and 2 feet to the over-all length, means that "Shamrock" will have a form far more easy to drive than "Valkyrie III." With fairer lines, less displacement, less wetted surface, a lighter hull, and a considerably lower center of gravity (see sheer-plan), due to the absence of rise in the keel, and a larger sail-plan than "Valkyrie III.," the "Shamrock" should prove to be a very dangerous competitor—by far the most capable ever sent across the Atlantic. Whether she is as good a boat (having regard to the improved materials of construction) as Watson could have designed, remains to be proved; but there is no reason to suppose that Fife has failed to make as great an advance over "Ailsa" as "Ailsa," was over his first big boat, "Calluna."

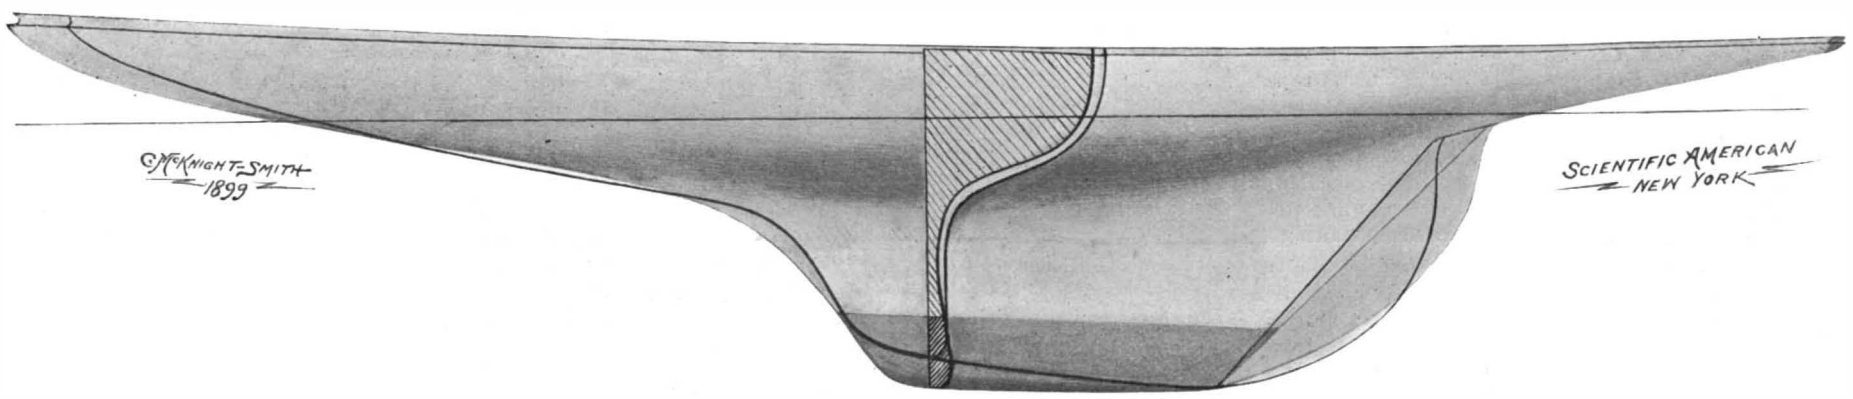

THE CUP CHALLENGER "SHAMROCK."

Shaded hull and lined section show "Shamrock"; heavy outline shows "Valkyrie III."

THE BRIDGES OF NIAGARA GORGE.

By no means the least interesting feature of Niagara Falls and that stretch of the river whose scenic features have assisted to make this locality world-famous, is the number of picturesque bridges which span the gorge, and form important links between the American and Canadian shores. In our issue of May 27, we gave a lengthy description of the natural features of Niagara Falls and River, accompanied by engravings showing the peculiar topographical character of the country. A brief glance at these engravings is sufficient to reveal the causes which have led to the bridges being thrown across the river below and not above the falls. Above the falls the river though shallow is extremely broad, widening in places to from 2 to 3 miles, and a crossing would be necessarily very costly. Below the falls, however, although the river is either too deep or too swift to admit of piers or even temporary false work, it is comparatively narrow, the distance from bank to bank at the summit varying from 1,200 feet just below the falls to 700 or 800 feet at the railroad bridges a mile further down the river. By reference to the engraving in the article referred to showing a bird's eye view of Niagara, it will be seen that there are at present four bridges across the gorge. The first is the great steel arch structure, known locally as the Upper Bridge, and again as the Niagara Falls and Clifton Bridge, which spans the river with a single arch, 840 feet between abutments, at a point about a quarter of a mile below the American Falls. A mile below is the cantilever bridge which carries the tracks of the Michigan Central Railroad, while closely adjoining it is the handsome steel arch bridge recently opened which was built to replace the old railroad suspension bridge which stood on the same side. A few miles further down the gorge, at Lewiston and Queenston, a suspension bridge is nearing completion which will take the place of the wrecked structure, the cables of which have for many years been a familiar feature at this point on the river.

Although it is true that there are but four bridges at present in existence, no less than nine separate bridges have been built at Niagara at different times during the past fifty years, the earlier structures having been either destroyed by windstorms or rendered obsolete by the advance of engineering and the growing demands of traffic. The first bridge to be erected at the site of the new Niagara Falls and Clifton structure was a suspension bridge of wood and iron, opened January 2, 1869, whose span was over 1,200 feet. The cables were of iron wire, the towers and the roadway of wood. It was only 10 feet in width, and, as two carriages could not pass each other upon it, long delays were frequent at either end. In 1887 the bridge was enlarged to a width of 17 feet, new 2½-inch steel cables and additional anchorages being added. The work was finished December 15, 1888, and on the night of January 9–10, 1889, the bridge, scarce a month old, was swept away by a fierce southwesterly hurricane. The rebuilding of the structure was at once commenced, and on May 7, four months after the disaster, it was again open to traffic.

The development of the electric railways on each side of the gorge and the evident advantages of making a connection at each end, and so forming a continuous belt line, led to the erection of the present magnificent arch bridge opened in 1898, whose span of 840 feet far exceeds that of any other arch bridge in the world, the next longest being the center span of the highway bridge at Bonn, Germany, which measures 639½ feet in length. The total length of the bridge is 1,240 feet and the rise 150 feet, the main span being supplemented by two shore spans, one 190 feet and the other 210 feet in length, which serve to carry the superstructure to a connection with the top of the cliffs. The masonry abutments of the main span are built at the edge of the river banks, the distance laterally between centers being 68 feet 9 inches. The two trusses have an inward batter at the rate of 1 7/16 in 12, and the posts of the supporting bents which carry the roadway lie in the same plane. The bents rest upon the alternate panel points of the trusses and they are strongly braced against longitudinal and lateral distortion. The roadway, 49 feet in width, provides two electric tracks, two driveways, and two footwalks for passengers. The shore spans are inverted bowstring trusses of graceful proportions. It is scarcely possible to speak in too high praise of the beauty and general engineering merit of this structure, and great credit is due to Mr. L. L. Buck and his assistants for having treated this formidable problem with such excellent æsthetic results that it rather adds than detracts from the scenic effects at this part of the gorge. In our illustrations of the bridge the point of view is on the Canadian shore looking northeast toward the Hydraulic Power Company's plant, just beyond which is seen the cascades formed by the tailraces of various smaller factories. The outlet of the 7,000-foot tunnel which discharges the water from the Niagara Power Company's plant is seen just below the downstream abutment of the arch bridge.

It is not necessary to give any lengthy description of the cantilever railroad bridge, a mile below the arch—so well is it known to the public. It was built in 1883 from the designs of Mr. C. C. Schneider and opened in December of that year. The crossing is about 100 yards above the site of the new steel arch, and the gorge at this point is 850 feet in width at the crest and 425 feet at the river edge, the depth to the surface of the water being 210 feet. As it was impossible to use false work, Mr. Schneider designed a cantilever bridge, with towers located at the foot of the sloping cliffs, and built out the main span by overhang—a method he had already carried through successfully at the Fraser River on the line of the Canadian Pacific Railway. The structure, which carries a double track, consists of two cantilevers resting on the towers and a central suspended truss. The shore arms of the cantilevers are 195 feet 2 inches and the river arms 175 feet in length, while the supported span is 119 feet 10 inches long, the total clear span between the towers being 470 feet, and the total length of the bridge between the anchorages on the edge of each cliff is a few inches over 910 feet. Although later developments in cantilever construction have rendered the Niagara bridge insignificant in comparison, the spans of the Forth bridge, for instance, being 1,710 feet, the Niagara cantilever will always be notable as being one of the earliest successful applications of the cantilever system of construction. The structure carries a double track, and it was designed for a rolling load consisting of two 66-ton locomotives followed by a trainload of 2,000 pounds to the lineal foot.

This was ample in 1883, but now, after a lapse of sixteen years, we have locomotives on some American roads weighing, with tender, up to 167 tons, and trains that

© 1899 SCIENTIFIC AMERICAN, INC.

will average 4,000 pounds rolling load to the foot. To meet the changed conditions the Michigan Central Railroad is now strengthening the whole structure in an ingenious and novel manner. A new truss equal in strength to the other two is to be built through the center of the structure from shore to shore, new bents and masonry foundations being erected in the center of the towers. The reconstructed bridge is to have an increased carrying power of 50 per cent.

The adjoining bridge site, 300 feet down stream, is of special interest, exceeding indeed any other across the gorge. Here, in 1848, was erected the first bridge to span the then formidable chasm. It was a crude affair, though creditable to its designer, Mr. Charles Ellet, if we consider the early date and the lack of appliances. The floor was only 7½ feet in width and it was not provided with any stiffening truss. In 1853 it gave place to the famous railway suspension bridge designed by Mr. John A. Roebling, in which the theories of the strength of materials and the strains in framed and suspended structures received a more thorough application than had ever before been attempted in this country. It required all the courage of Mr. Roebling's convictions to erect a suspension bridge for carrying railroad trains at a time when opinion inclined to the more rigid systems for this class of bridge; but the structure, although it has now been replaced by a steel arch, proved to be fully adequate to its duties for several decades of very severe work. The span measured 821 feet 4 inches between towers. It was carried on four cables of iron wire, 10 inches in diameter, and the floor system was double-decked, the upper deck carrying a single railroad track and the lower being used for common travel. It was stiffened by two timber trusses, 18 feet in depth, the trusses being built on the Pratt system.

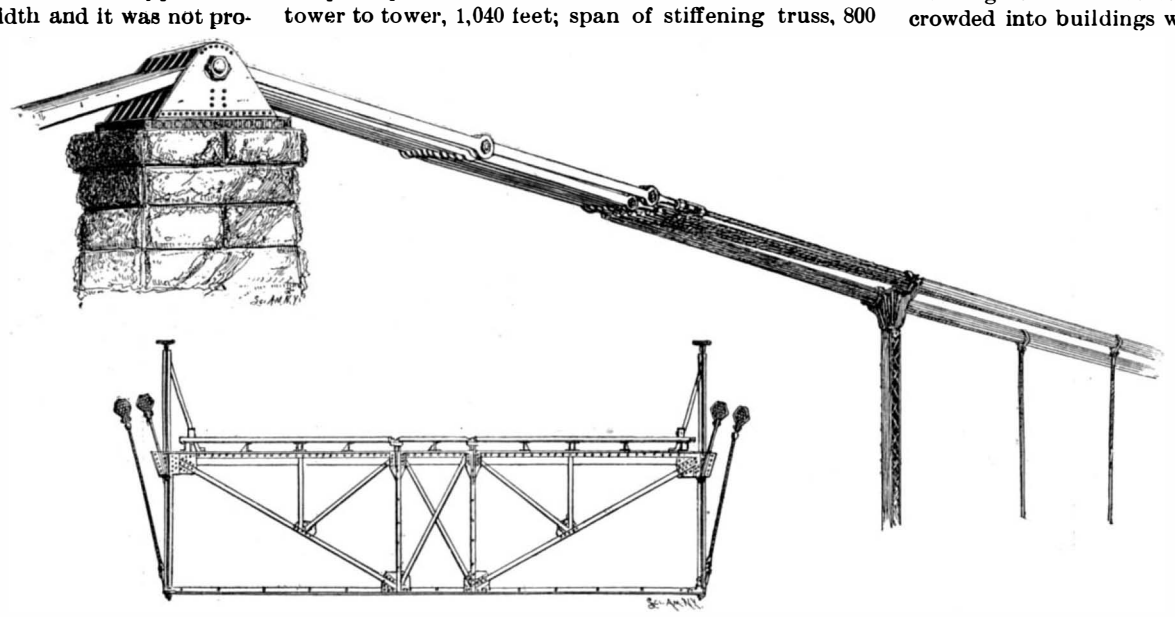

Lewiston Bridge—Tower, Eyebars, and Top of Rocker Bent.

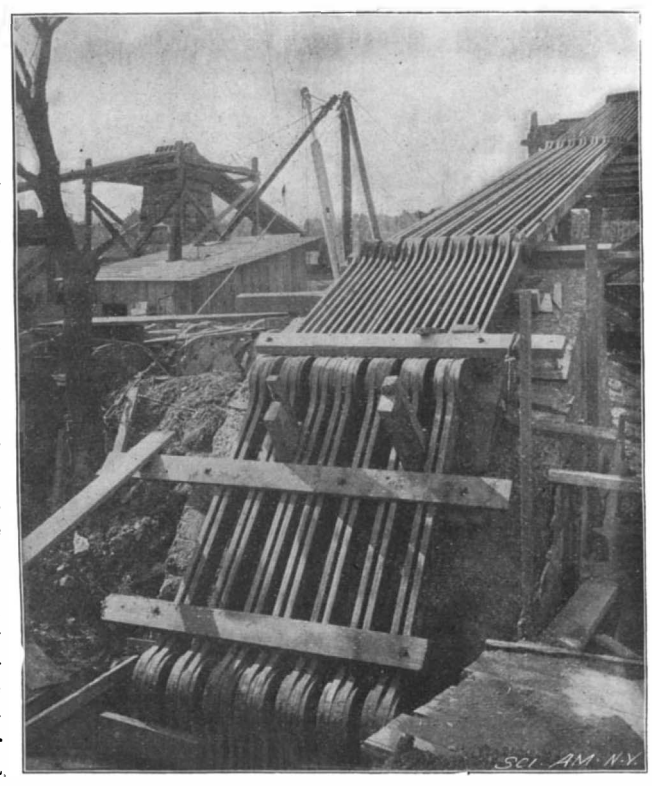

Lewiston Bridge—One of the Anchorages.

It should be mentioned that the wires of the early Ellet bridge were incorporated in the Roebling structure, and when the latter was taken down after forty-two years of service, the original strands curled up, taking the set they had carried when in the reel. In 1877 it was found that corrosion of the wires had taken place, and the defective material was taken out and other wires inserted and spliced, and at the same time the wooden truss was replaced by one of iron. In 1886 the stone towers showed such signs of deterioration that it was decided to replace them later with new towers of steel. This difficult task was accomplished by Mr. L. L. Buck, who also was responsible for the repairs of 1877, without any interference with the traffic. The Niagara Railway Arch, as it is called, is a two-hinged, spandrel-braced arch of 550 feet span and 114 feet rise. The masonry abutments are built about half way down the slope of the gorge, upon a solid stratum of gray limestone, and the main arch is flanked by two connecting shore spans, 115 feet in length, which carry the floor system from the arch to the edge of the adjoining cliffs. The structure is double-decked, the upper deck carrying two tracks and the lower providing a roadway with broad sidewalks carried on the outside of the trusses. The bridge is proportioned for a live load on each of the tracks of two 128-ton engines, followed by a train load of 3,500 pounds to the foot, besides the live load due to travel on the road and foot ways on the lower deck. The bridge was erected by building the shore trusses upon false work, tying them back to anchorages on the shore and then building out the main arch by overhang, as shown in our first page engraving. The material was brought out upon the suspension bridge and handled by travelers which ran upon the top chords of the arch trusses. The new bridge was built and the old bridge removed without any interruption of the traffic—a result which is greatly to the credit of Mr. Buck and his assistant, Mr. Richard S. Buck, the resident engineer in charge of construction at the site.

The Lewiston suspension bridge, which is now nearing completion, will also stand upon the site of an earlier structure—the old Lewiston suspension bridge, which was built in 1851-52 and destroyed by a windstorm on the morning of February 1, 1864. The new bridge will connect the southern termini of the Gorge Railroad (electric) which follows the cliff and shore line of the river from Niagara to Lewiston, on the American side, and the Niagara Falls Park and River Electric Railway, which runs near the edge of the cliff from above the Falls to Queenston on the Canadian side. The new bridge with the upper arch bridge will thus enable the tourist to make a complete circuit of the most interesting portion of the gorge without a change of car. The general appearance of the bridge can be judged from the accompanying drawing, and the principal dimensions are as follows: Distance from tower to tower, 1,040 feet; span of stiffening truss, 800 feet; width, 28 feet; width of roadway, 25 feet. The bridge carries a single electric track with a roadway on each side of it; but no special provision is made for the limited foot passenger traffic. The connecting span on the New York side will be 34½ feet long and that on the Canadian side 19½ feet. Much of the masonry of the towers came out of the towers of the old bridge. There are four cables, each consisting of fourteen 2½-inch steel wire ropes, the ropes being those which formerly carried the upper suspension bridge, already described. They were long enough to allow of their being cut in half and used in the new bridge, and to piece out the necessary span between towers, 75 feet at the end of each cable will be made up of eye-bars. The cables are continued in the eye-bar form from the towers down to the anchorages, 150 feet back from the edge of the cliffs. Here the eye-bars are carried into a shaft, at the bottom of which they are connected to anchor plates, the hole being filled up with concrete. A view of the top of an anchorage is shown in the accompanying cut. At each of the points where the suspended structure connects with the short flanking spans a rocker bent is introduced which rests on a shoe below and extends up to the cables above. The bent is hinged at the shoe, at the end of the truss, and at the cable. This construction, and indeed the whole bridge, is novel and not by any means lacking in picturesque effect.

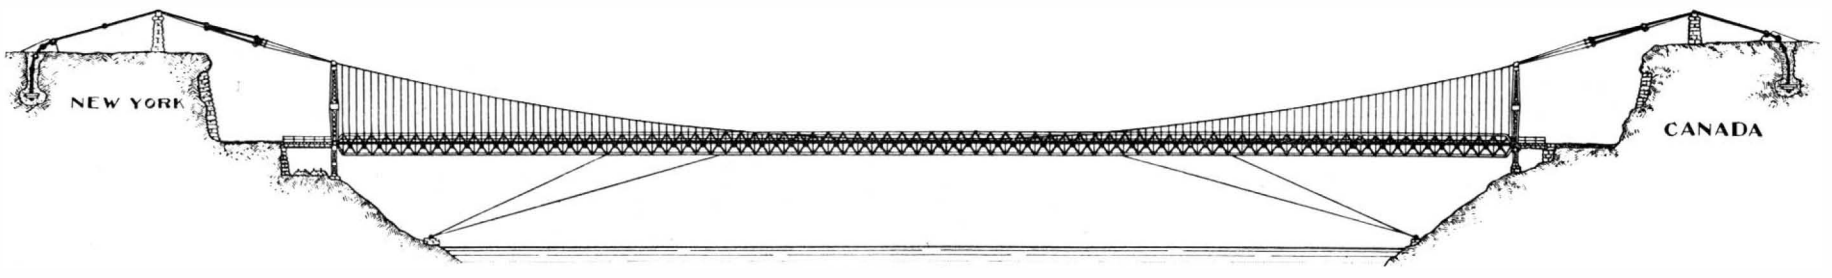

Lewiston Suspension Bridge, Niagara River—Span Between Towers, 1,040 Feet; Length of Stiffening Truss, 800 Feet.

THE BRIDGES OF NIAGARA GORGE.

Workingmen's Houses in Germany.

Vice-Consul J. F. Monaghan writes from Chemnitz, saying that there is a movement on foot to furnish workingmen with better tenements. Now, they are crowded into buildings which often look like barracks. The proposed houses will be built upon lots about 16½ feet wide by 102 feet deep, thereby allowing for a front yard for flowers and a back yard for a vegetable garden and shed, the latter for the keeping of poultry or some domestic animal. The houses will contain five rooms. A parlor and kitchen will be on the first floor, the parlor containing a porcelain stove and heating pipes, and the kitchen a wash boiler and stove. The three bedrooms on the second floor will easily hold five or six persons, and can be made to accommodate ten. In the largest an iron stove will be placed. A pump will provide water where the city waterworks do not extend to the house. In connection with the shed is a water-closet. The cost of such a house and lot, when a number are built at a time, will be between $850 and $940. It will rent for about $53 a year—that is, for the same price the workingman has to pay for two rooms in the barrack-like tenements of the large cities.

The Death of Isaac G. Johnson.

Isaac G. Johnson died at his Spuyten Duyvil home on June 3, in the sixty-eighth year of his age. He was born in Troy and graduated in 1848 at Rensselaer Polytechnic Institute. He soon entered upon the manufacture of malleable iron in Spuyten Duyvil, and in later years turned his attention to steel manufacture. He was well known as an inventor, and he secured a patent on a cap for armor-piercing shell. This was purchased by the Navy Department, and proved of the greatest value at the time of the destruction of Admiral Cervera's fleet.

The Current Supplement.

The current SUPPLEMENT, No. 1224, has many articles of great interest. "The School of Anthropometry at the Prefecture of Police" is an article fully illustrated. "Into the Heart of China" is the narrative of a journey through the center of China taken by Mr. W. Kirkpatrick Brice and is most interesting. "The Elephant and Its Ancestors" is an important article by W. Von Reichenau, and is freely illustrated. "The 'Wourali' Poison and Its Uses" is an original and valuable article, by Dr. Eugene Murray-Aaron. "Notes on the Abyssinians" is fully illustrated. "The Commercial Development of Germany" is continued, and an article on "Graphite, Its Formation and Manufacture," by Prof. Acheson, completes this very interesting number.

Contents.

(Illustrated articles are marked with an asterisk.)

Acetylene generator*..... 390
Bathing establishments, municipal..... 388
Bicycle, movement of..... 393
Bridge disaster*..... 391
Buildings in Budapest, moving.. 391
Canal commission, new..... 388
Chemists, agricultural..... 393
Coal production of the world.... 389
Gates, fastener for*..... 390
Hydrogen, liquefied..... 392
Inventions, index of..... 398
Inventions recently patented... 398
Johnson, Isaac G..... 397
Liquid, motion of a perfect..... 390
Magnesium, combustion of..... 395
Meteorites, fall of..... 391
Navy, peril to the..... 388
Niagara Gorge, bridges of.* 387, 396, 397
Notes and queries..... 393
Olive industry, California..... 389
Pressure regulator*..... 390
Railroad, Uganda..... 395
Reading distance, proper..... 392
Reservoir..... 393
Roads, poor, what they cost the farmer..... 388
Science notes..... 393
"Shamrock"*..... 396
Silk preserving machinery..... 392
Static machine*..... 394
Supplement, current..... 397
Telegraph, submarine 392
Thomson, death of Frank..... 389
Trusts..... 393
Victorium..... 395
Workingmen's houses in Germany..... 397
Yacht, racing*..... 396

© 1899 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Bicycle-Appliances.

PEDAL.—Charles D. Walker, Honolulu, Hawaii. The pedal comprises a disk held upon the crank and carrying on its periphery a pedal-ring having rotation upon balls running in raceways on the periphery of the disk. The pedal-ring carries a foot-support. As the pedal moves down, the rider's foot inclines the foot-support so that its rear end is lower than the front end, the greater portion of the support being in the rear of the pin. By reason of this arrangement, it is claimed that the rider secures a foothold which will reduce the strain on the pedal ball-bearings, and which will facilitate ankle-motion.

DRIVING-GEAR.—Edwin C. Pohle, Denver, Colo. On the bicycles in general use, the pedal is made to describe a complete circle, thus causing the foot to pass through a similar path, while the effectual advance of the foot is equal only to the diameter of the circle. In the present invention, the pedals advance through sixty degrees and then return, thereby avoiding much of the usual unnecessary motion. The inventor gives a reciprocating motion to the pedals by the introduction of a connection between the crank-shafts, and by a piston-rod connection with the driving-wheel, so that the power applied to one pedal advancing, causes the other to return; or the momentum of the bicycle carries the pedals through this advancing and returning motion. The rider can, therefore, use his power either in driving or retarding the bicycle.

ADJUSTABLE HANDLE-BAR.—Jesse Alexander, Brooklyn, New York city. The hollow cross-head of the bar is slotted in alinement with the steering-post. A spring-pressed slide-bar is adapted to engage a perforation in the handle-bar within the hollow cross-head. A bolt passes across the post through perforations therein, to clamp it and the hollow cross head. By depressing the slide bar, the handles can be raised or lowered to any position. The slide bar, upon being released, springs into engagement with the slotted cross-head and holds the bar in position.

Electrical Apparatus.

ELECTRIC LIGHTING APPARATUS.—Andrew Plecher, Savannah, Ga. This apparatus is designed to be employed for especial X-ray illumination, or for general electric lighting. The lamp used comprises a vacuum-bulb in which is located one pole of an electro-magnet having a fluorescent surface. The helix of the magnet is arranged in a primary circuit-wire around which an insulated secondary wire is wound throughout its length between lamps. The helix extends the full length of the primary wire between lamps, and is provided in the bulb with cathode-terminals. The cathode rays, as they radiate from the terminals, are laterally deflected by the influence of the magnet, and in bombarding the especially-prepared surface, cause that fluorescent surface to shine intensely.

Mechanical Devices.

GRAVITY-MACHINE.—William H. Hawkes, Ann Arbor, Mich. This machine is designed to measure the distances a body falls during successive equal intervals of time, in order to show experimentally the acceleration due to gravity, at the same time to record the measured distances. Upon the frame of the machine a pulley is journaled, about which passes a band carrying a weight. Over the band a pencil is mounted, which is actuated by the armature-lever of an electromagnet to leave a mark upon the moving band. In the circuit of the magnet a mercury-cup is placed, into which dips the lower end of a pendulum. The pendulum in swinging dips into the mercury at the end of each down stroke, completes the circuit, and causes the pencil to leave a mark upon the band. These marks represent the distances fallen by the body carried by the band during the beats of the pendulum.

Miscellaneous Inventions.

BARREL-COVER-TIE HOLDER.—Colonel F. Dean, Carmel, N. Y. The holder provided by this inventor is designed to hold a cloth cover on the barrel. The holder consists of a single length of wire bent to form two concentric rings and having the ends turned around the rings at top and bottom and then turned outwardly to form prongs to be driven into the barrel. The device is to be permanently attached to a barrel, and is designed to be used many times for shipment and re-shipment.

FUMIGATING SHOE-TREE.—John S. Busky, Brooklyn, New York city. The tree is hollowed to form a cavity in which an antiseptic or fumigating apparatus is placed, provided with means for impregnating it with an antiseptic liquid. The tree has openings from the interior cavity to the outside, through which the liquid may act upon the shoe.

GARMENT-HANGER.—Adam K. Bowman, Greensburg, Pa. This hanger for skirts and the like consists of skeleton wings extended in opposite directions. Each wing has an upward and outward inclination and is provided with an inclined end supporting-section. A coil connects the lower members of the wings, and a shank extends upwardly from the junction of the two wings. If the waistband should become unbuttoned, the skirt could not drop from the device, since the weight of the skirt would carry the wings down until they had spread apart sufficiently to hold the skirt.

HINGED BUCKLE.—Jesse R. Young, 710 Bank Street, Kansas City, Mo. Considerable difficulty is experienced in sewing a buckle to a strap or rein because the rigid metal keeper is in the way of the needle and presser-foot of the sewing-machine, so that several stitches have to be sewn by hand. To overcome this difficulty, the inventor hinges his keeper to the buckle, folding it over so that the sewing can proceed without interference. After the stitching is completed, the keeper is folded back over the strap, and riveted in place.

VEST.—Joseph G. Ewing, McDonald, Pa. In order to economize material and labor, and thus reduce the cost of manufacturing coats and vests, means have been devised for providing false lapels which resemble those of the usual construction. The means consist in turning the cloth over at the front edge of the vest and holding it in place by a piece of inelastic tape stitched to the cloth. This line of stitching and the lapped edge of the cloth form a pocket which is stuffed to form a swell resembling the lapel ordinarily seen on a coat or vest.

FILTERING APPARATUS.—Charles V. F. Ludwig, St. Louis, Mo. The purpose of the present invention is to provide a filtering apparatus designed to purify the water of rivers and streams, the apparatus being arranged to filter the water directly and to return the sediment to the source of supply. The filter has a filtering-wall of porous stone constructed with arches. Revoluble brushes are in contact with the arch-surfaces and have propellers which are actuated by the current. The propellers turn the brushes so that any sediment passing under the arches is scraped off. The sediment thus removed readily floats off or settles.

ACETYLENE-GAS GENERATOR.—Oliver H. Hampton, Williamsburg, Ind. The bell of the gasometer has a sliding connection with a weight normally resting on a support in the tank and is connected with the generator by a vertical gas-pipe. A bell in the generator-tank is provided with a depending tube sliding on the gas-pipe, and is apertured at its upper end to permit the escape of the gas. The acetylene generated flows into the gasometer-bell, and when the pressure of the gas has risen within this bell to the desired degree, the gasometer-bell overbalances the generator-bell, and the latter is forced upwardly by the pressure of the gas.

ATTACHMENT FOR TYPE-FORMING MACHINES.—Charles A. Hollenbeck and Richard F. Wilson, Albany, N. Y. The generally-employed method of forming linotype or line slugs, consists in casting a line of one table on one slug and a line of the other on the other slug; and, after cutting off the blank parts of the slugs, the portions containing the tables are placed end to end. In order to overcome the difficulties of this tedious process, the present invention provides an assembling-slide carrying an adjustable upright and a fixed upright. By means of the improvement the inventors are enabled to cast on one slug a portion of each table, and at the same time maintain an alinement of the tables.

PUZZLE.—Herman Schlirf. Ashland, Wis. This puzzle or game consists of a board in which are sunk stalls in the shape of the numerals "1900." These stalls communicate with a circular pathway around a disk, which circular pathway communicates with other pathways. In the pathways large and small balls are adapted to travel, the board being so tilted that one large and one small ball shall roll into each of the stalls constituting the numeral "1900." Owing to the peculiar form of the stalls, the inventor has termed his game "The Nineteenth Century Puzzle."

SEAT FOR MARKET-WAGONS.—George A. Kinsey, Springland, Queens, New York city. A simple, revolving, canopy-top seat has been devised by this inventor, which is especially adapted for use upon market-wagons and which is capable of facing the front or rear, so that when the wagon is at the stand the farmer may face his load and at the same time occupy the seat of the wagon and enjoy the protection of its attached canopy. The seat is pivoted at the transverse center of the body so that it can be readily swung.

PRODUCT FROM BLAST-FURNACE SLAG.—Alexander D. Elbers, Hoboken, N. J. Pulverized blast-furnace slag cannot be desulfurized in a practical manner by roasting it without suitable admixture, or in its crude state, because it is apt to rescorify before the sulfur is fully removed. The roastings are liable to become too dense for the proper admission of air before even the first half of the sulfur has been expelled, and will hence certainly rescorify during the progress of the heating. In order to obviate these and other difficulties, the inventor combines his pulverized desulfurized slag with three-fourths of one per cent and upward of sodium or potassium oxid in the fritted state. The products of this treatment are useful as a flux for the manufacture of glass and pottery, and as an admixture to hydraulic cements.

MEANS FOR DETACHING HARNESS FROM SHAFTS.—Frederick Dickerboom, Mankato, Minn. The attachment comprises a casing having an undercut groove in which a slide having a notch moves. A lock-bar is fitted in the casing and has a shoulder adapted to engage in the notch of the slide, the lock-bar moving bodily toward and from the slide. A bow-spring bears with its ends on the lock-bar and with its intermediate portion on the casing to push the lock-bar toward the slide. An eccentric-pin is mounted in the casing and engages the lock-bar at the side opposite to the spring by which to move the lock-bar against the spring and away from the slide. The attachment is to be applied to the thills and to be connected with the harness.

ATOMIZER.—William E. Whittier, Brooklyn, New York city. An improved atomizer has been provided by this inventor, which is arranged to atomize a liquid and vaporize another in a very simple manner. The device comprises an inner and an outer receptacle. Air-inlet pipes lead to the inner and outer receptacles and are adapted for connection with an air-supply. Separate outlets extend from the inner and outer receptacles, each of the outlets terminating in a separate discharge-nozzle exteriorly of the receptacles, whereby the medicaments contained in the receptacles may be successively applied.

ADVERTISING MEDIUM.—John A. Aniello, New Orleans, La. The medium consists of a wheeled vehicle in the body of which a shaft is arranged to be driven by the movement of the vehicle. Another shaft is provided which, when turned, operates a musical instrument. The various shafts have pulleys and belts to transmit power from one to the other. When the vehicle moves, motion is given to endless advertising bands carried by the vehicle; music is produced to attract attention; and in addition a figure is made to appear periodically to attract still further attention.

CHEMICAL FIRE-EXTINGUISHER.—Abram H. Van Riper and Patrick F. Guthrie, Nutley, N. J. The apparatus comprises a main cylinder connected with a gas-pressure cylinder, an auxiliary cylinder connected by a pipe with the main cylinder, a plunger operating in the auxiliary cylinder, and a hopper containing a chemical cartridge and having a connection with the auxiliary cylinder. The main cylinder, filled with a chemical solution, is charged with gas from the gas-cylinder, the pressure causing the solution to be discharged through a hose. Water is poured into the hopper, and this water, passing through the chemical cartridge will form a solution which can be forced into the main cylinder by means of the plunger.

REVOLVING BLACKBOARD.—Martin W. Tubbs, Portville, N. Y. The revolving blackboard is arranged to carry a number of flexible blackboards normally wound on rollers, but adapted to be singly unwound and extended over and fastened to a fixed support, and used like an ordinary blackboard. The whole arrangement requires wall space for but a single blackboard, with the advantage of having the use of several, and of concealing or exposing work at the pleasure of the teacher.

INCANDESCENT-ELECTRIC-LAMP FIXTURE.—Benjamin F. Rout, Stanford, Ky. The lamp-fixture comprises a support on which a casing-section is rigidly mounted. Another casing-section is mounted to rotate relatively to the fixed section. A drum is secured to the rotatable section and is designed to receive and wind the electric conductors. A spring moves the drum and rotatable section; and a socket on the rotatable section receives the incandescent bulb. The lamp may be used both as a hanging lamp or as a standing lamp. In the former case the lamp, when drawn down, causes the rotating drum to unwind the conductors and to wind up the spring. The lamp upon being released from its position, is drawn up by the spring.

GATE-LATCH.—Oliver E. Potter, Cameron, Miss. This invention provides a gate composed of two parts pivoted to swing toward and from each other. Upon one-half of the gate a double latch is mounted, composed of toothed plates pivoted one upon each side of the gate, the outer or free ends thereof flaring outwardly to form a guide in order properly to register the two halves of the gate. Locking projections upon each side of the other half of the gate are engageable by the toothed plates.

BRACKET-SUPPORT FOR WINDOW-SHADES.—David D. O'Connell, Wallace, Idaho. The bracket-support comprises bars held to slide upon each other, each bar being provided with a series of keyhole-slots. Buttons on the inner end portions of the bars are adapted to enter and to slide in the keyhole-slots. Each bar also has vertical openings near its outer ends. Angular hangers are provided, one member of the hangers being adapted to enter the openings. Clamping devices are located on the outer ends of the bars. The bracket-support is readily adjustable to any width of window and can be secured so as not to injure the window-casing.

HINGE.—Hyman G. Hilzheim, Jackson, Miss. This hinge consists of four leaves or sections, and three pivotal joints or points of articulation, the outer leaves being somewhat narrower than the inner leaves, and having screw-holes and free outer edges for connection with the door and the jamb respectively. The hinge, when the door is closed, is entirely concealed. Hence for safes, whose hinges should be carefully protected, for piano-tops, or for other smooth surfaces, the hinge is of especial service.

HORSE-POWER AND PUMPING-JACK.—Benjamin F. Darlington and Edwin P. Clary, San Antonio, Tex. The present invention provides, in conection with a rotating head or turn-table, a sweep or shaft which rotates with the turn-table or head, being journaled therein, and which has a crank connected with the pumping-devices and a wheel rolling on the ground, or other suitable bearing, and operating to turn the shaft or sweep as the turn-table or head is rotated.

OIL-WELL PACKER.—Joseph Darling, Chicora, Penn. The improvement devised by the inventor provides, in connection with the usual packer and the slips co-operating therewith, detent devices for restraining the slips, which may be set and reset. In connection with the slips a spring is furnished, secured at one end to the slips. A holder at the other end of the spring binds within the well-hole. The detent devices may be automatically readjusted to secure the resetting of the packer at either a higher or a lower level.

AUTOMATIC LUBRICATOR FOR LOOSE PULLEYS.—Karl Widmann, Pattendorf, Austria-Hungary. The lubricator is designed to be used on loose pulleys, and is especially adapted to those pulleys which are driven at very high speeds. On the shaft a sleeve is mounted, which carries a dripping cup. The pulley has a hub formed in two hollow sections. Each section has a ring loosely mounted on the sleeve, which ring forms an oil chamber through which the dripping-cup moves. The oil is thus constantly brought into contact with the revolving parts.

OIL-GAS LAMP.—James A. Yarton, Omaha, Neb. This invention comprises an improved form of generator and shield therefor, together with a method of supporting the lamp so that it may be swung to one side, and thus drawn from under the generator. The invention also comprises an improved construction of controlling-valve and settling-chambers, whereby any sediment in the oil is prevented from entering the generator-tube. A further novel feature is found in the direct contact of the filling wires in the generating-tube with the tip, whereby the tip is more thoroughly heated and condensation of the vapors and consequent clogging of the tip prevented.

Designs.

SHOULDER-GARMENT.—Frank F. Amsden, Malone, N. Y. One of the features of this design consists in forming the shoulder-garment with straight lower edges at back and front, and with curved lines at the sides.

PENCIL-HOLDER.—Malcolm Williams, Pasadena, Cal. The pencil-holder is a tube having a studded exterior surface, the studs serving to prevent the pencil's falling from the pocket.

CHURN-FRAME.—Mattie O. Morrow, Sulphur Springs, Tex. The churn-frame supports the heater and aerating devices entirely from the upper end, so that the latter are maintained in a suspended position in order that any kind of churn-receptacle may be placed on the frame and used in churning the butter. This saves the farmer the expense of buying an entire churn. The frame is built of wood and may be constructed by any carpenter, or farmer familiar with the use of woodworking tools.

Note.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

Marine Iron Works. Chicago. Catalogue free.

For mining engines. J. S. Mundy, Newark, N. J

"U. S." Metal Polish. Indianapolis. Samples free.

Gasoline Brazing Forge, Turner Brass Works. Chicago.

Yankee Notions. Waterbury Button Co., Waterb'y, Ct.

Handle & Spoke Mchy. Ober Lathe Co., Chagrin Falls, O.

"Criterion" Acetylene Generators, Magic Lanterns & accessories. J. B. Colt & Co., Dept. N, 3-7 W. 29th St., N. Y.

Inventions developed and perfected. Designing and machine work. Garvin Machine Co., 141 Varick St., N. Y.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Refrigerating Machine Company. Foot of East 138th Street, New York.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4. Munn & Co., publishers, 361 Broadway, N. Y.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated: correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(7674) G. S. W. writes: I have looked in many books of reference here and have been unable to find a receipt for kalsomining. Will you kindly answer in your inquiry column. A. Prepared kalsomine can be readily purchased at any large paint store, but some of our readers may wish to prepare their own kalsomine. The following rules are given for the purpose of enabling them to do so: Soak 1 pound of white glue over night, then dissolve it in boiling water and add 20 pounds of Paris white, diluting with water until the mixture is of the consistency of rich milk. To this any tint can be given that is desired. Lilac.—Add to the kalsomine 2 parts of Prussian blue and 1 part of vermilion, stirring the mixture thoroughly and taking care to avoid too high a color. Brown.—Burnt umber. Gray.—Raw umber, with a trifling amount of lampblack. Rose.—Three parts of vermilion and 1 part of red lead, added in very small quantities until a delicate shade is produced. Lavender.—Make a light blue and tint it slightly with vermilion. Straw.—Chrome yellow with a touch of Spanish brown. Buff.—Two parts of spruce, or Indian yellow, and one part of burnt sienna. Blue.—A small quantity of Prussian blue will give a soft azure tint. Dark blue is never desirable. Delicate tints in the foregoing varieties of colors are always agreeable and tasteful, and so great care must be taken that they are not too vivid. The tints will always appear brighter than in the kalsomine pot, and this fact must be kept in mind when adding the coloring powders.

(7675) A. R. W. writes: Please send prices of the first books necessary to be studied in taking an electric engineer's course. A. We should advise you to begin with Thompson's "Elementary Lessons in Electricity," price $1.40; Crocker's "Electric Lighting," price $3; Hawkins & Wallis' "Dynamo," price $3; all by mail.

(7676) Subscriber asks: If a stream of water is played on a trolley wire from a 1½-inch nozzle what effect will it have on the man holding the pipe, if any, standing on dry or wet ground? A. We should not expect any effect either agreeable or disagreeable.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending

JUNE 6, 1899.

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Acetylene generator, A. Davis	626,272
Acids, obtaining silicic and hydro-fluo silicic, E. Teisler	626,511
Addition proving device, C. H. Boehl	626,524
Adjustable stand for supporting and displaying purposes, C. P. Hornback	626,541
Air cleansing and cooling device, J. McCreery	626,388
Air cooling and cleansing device, J. McCreery	626,390
Alloy of iron and nickel and articles made therefrom, Guillaume & Dumas	626,655
Alloys, manufacture of, Guillaume & Dumas	626,609
Aluminum from its compounds, reducing, G. Schwahn	626,635
Anchor, I. Crocker	626,224
Aqueduct, C. N. Dutton	626,321
Atmospheric burner, P. G. de Schodt	626,302
Baby jumper, J. Benjamin	626,521
Baling press, S. I. Watkins	626,355
Ball. See Tenpin ball.	
Bath apparatus, vapor, H. Finzel	626,373
Bearing, ball, M. Foidart	626,274
Beer, apparatus for drawing and serving steam, G. A. Friedrich (reissue)	11,745
Belt carrier canvas fastener, Smyser & Taylor	626,572

(Continued on page 399)

© 1899 SCIENTIFIC AMERICAN, INC.

Belt, concentrating, G. Gates 626,461
Bicycle crank, E. D. Peerstone 626,630
Bicycle crank attachment, L. B. Gaylor 626,227
Bicycle driving gear, J. Brough 626,525
Bicycle frame flush joint, tubular, C. S. Smith 626,309
Bicycle handle bar, J. T. Fenton 626,602
Bicycle handle bar grip clamp, J. E. Robinson 626,633
Bicycle lock, C. A. Hall 626,656
Bicycle, motor, J. F. Raders 626,440
Bicycle motor attachment, E. J. Pennington 626,295
Bicycle pump, coin controlled, L. S. Brown 626,268
Bicycle repair link, J. C. Jenkins 626,383
Bicycle running on rails, P. Wagner 626,580
Bicycle saddle, pneumatic, L. Widdershoven 626,644
Bicycle support, E. Lindstrom 626,239
Bicycle variable gear, A. L. Whipple 626,257
Bicycle wheel, D. R. C. Devine 626,411
Blowpipe, M. P. Freddy 626,608
Boiler. See Steam boiler.
Bolt making machine, W. W. Hubbard, Jr 626,234
Boring machine, multiple, W. D. Neville 626,502
Bottle, A. A. French 626,418
Bottle, W. H. Hutton 626,235
Bottle and its stoppering, M. M. J. O. O'Conor 626,557
Bottle handle, glass, H. E. Wright 626,262
Bottle, non-refillable, A. D. Avedisyan 626,516
Bottle, non-refillable, E. Freese 626,417
Bowling alley light and pin indicator, G. Burkhardt 626,590
Box. See Die box. Letter box. Lunch box. Music box.
Box fastener. A. J. Lauer 626,329
Bracket. See Foot rail bracket.
Braid, skirt, Thun & Janssen 626,397
Brake. See Wagon brake.
Brake shoe, R. Walsh (reissue) 11,746
Brick, tile, etc., and construction of walls, etc., Sheppard & Dashwood 626,307
Brush, H. A. Ducat 626,529
Buckle, back band, T. A. Rhodes 626,442
Buckle, clasp, C. W. Rendell 626,393
Buckle, harness, L. B. Comer 626,220
Buffing machines, making abrasive pad covers for, Rogers & Winslow 626,300, 626,301
Bulkhead door, J. S. Muckle 626,551
Bulkhead door, revolving cylindrical, W. Kirkaldy 626,327
Burner. See Atmospheric burner. Hydrocarbon burner. Gas burner. Vapor burner.
Bust pad and chest protector, M. F. Buchner 626,589
Button, C. A. Bryant 626,408
Button, F. G. Neubert 626,392
Button, J. V. Washburne 626,398
Button, cuff, H. A. L. Libaire 626,433
Button eyelet attachment, J. V. Washburne 626,399
Can. See Shipping can.
Can opener, F. C. Smalstig 626,507
Canteen, G. S. Knapp 626,238
Car and train ventilation, railway, J. McCreery 626,389
Car fender, F. E. Bemelmans 626,480
Car fender, G. W. Naylor 626,290
Car fender, W. E. Smith 626,639
Car replacer, W. B. Weiss 626,400
Car transom, M. B. Schaffer 626,443
Car wheel, T. A. Bainbridge 626,517
Cars, double safety guard for open railway passenger, F. Steffens 626,349
Card holder or backing, J. H. Crossingham 626,459
Carpet sweeper, C. King 626,466
Carrier. See Casket carrier.
Cartridge shells, tool for turning heads of, T. H. Rylands 626,634
Case. See Shipping case.
Case, A. J. Kearns 626,430
Cask, veneer, G. Sauter 626,248
Casket carrier, A. Kircher 626,432
Casket lowering device, J. Vail 626,640
Caster socket, B. H. Noelting 626,439
Cattleguard, J. W. Dodd 626,598
Centrifugal machine, F. L. Depew 626,597
Checking and registering accounts, means for, W. N. Simpson 626,637
Checking or unchecking device, Fournier & Winder 626,323
Checkrein hook, A. T. Moore 626,288
Christmas tree stand, A. A. Wagner 626,514
Churn, M. O'Marrow 626,623
Cigarette former, J. H. Bock 626,265
Cleaner. See Fruit cleaner.
Cleat for securing halyards, etc., F. Hawes 626,230
Cleat, supporting, J. W. Atlee 626,359
Clipping hair from skins of fur bearing animals, machine for, P. Young 626,473
Clothes pounder, P. Byrns 626,455
Clothes pounder, A. C. Leigh 626,658
Clothes rack, J. F. Koob 626,618
Clover buncher, J. F. Wheeler 626,471
Coaling station, Honstain & Bird 626,232
Cock boxes, etc., rim and cover for stop, Rietzinger & Kavanagh 626,565
Coin handling device, C. Debremond 626,528
Collar, horse, L. L. Miller 626,549
Column, box, L. L. Calvert 626,365
Compass guide support, R. R. Robinson 626,246
Controller operating mechanism, W. G. Wagenhals 626,643
Conveyer, spiral, R. Commichau 626,409
Cooler for soda water or other aerated liquids, C. Adami 626,450
Copper oxide, producing, C. Luckow 626,547
Copy book and cover, J. A. Ramsey 626,441
Cord, lines, laces, etc., ornamental knob or end piece for, B. J. Fisher 626,374
Corncob kindling, Skiles & Bourne 626,308
Corn cutter, shocker, and binder, C. H. Underwood 626,512
Coupling. See Faucet coupling. Railway carriage coupling. Rod and cable coupling. Shaft coupling. Thill coupling.
Crane or conveyer, traveling, A. R. Goldie 626,276
Crate or case, shipping, J. M. Gilbert 626,419
Crusher. See Ore crusher.
Cultivator attachment, A. G. Perry 626,562
Cultivator fender, adjustable, G. L. Cornell 626,222
Cup. See Dope cup.
Curette, V. May 626,625
Cutter. See Corn cutter.
Cycle driving gear, W. H. Wakfer 626,642
Cycle hanger, E. Gradlmiller 626,535
Die box and check box, combined, J. T. Hicks 626,278
Digger, D. M. Baldwin 626,360
Disinfecting device, automatic, J. Michel 626,242
Dope cup, W. A. Downes 626,489
Draught rigging, Vissering & Hoerr 626,253
Dredge for hard or soft mud, J. T. Ford 626,491
Drill attachment, hand brace, W. H. Ames 626,474
Drilling apparatus, G. E. Diehl 626,488
Dry kiln door or closure, R. B. Andrews 626,475
Drying apparatus, P. V. Viele 626,579
Edger, gang, S. B. Kenfield 626,431
Educational appliance, J. H. Hargens 626,425
Egg testing apparatus, J. Lyons et al 626,284
Elastic compound, P. C. Bell 626,479
Electric meter, coin controlled, Phillips & Tilden 626,298
Electric motor or dynamo electric machine, R Lundell 626,496
Electroplating, method of and apparatus for, A. A. Blackman 626,361
Embossing machine, R. F. Emmerich 626,490
Embroidering and edging machine, E. & R. Cornely 626,367
Emery wheel hood, O. Konrad 626,544
Enameling compound and producing same, W. A. Hall 626,537
Engine. See Locomotive engine. Rotary engine. Vertical engine.
Engine igniter, gas, C. C. Riotte 626,394
Engines, means for starting and regulating oil or gas, Thompson & Monte 626,252
Engines, speed regulator for explosive, J. Froelich 626,275
Engines, steam steering gear for portable, L. Brown 626,484
Eyeglass gage, L. A. Stevenson 626,575
Eyeglasses, W. B. Greene 626,536
Faucet, E. W. Thayer 626,578
Faucet coupling, multiple delivery, T. G. Strater. 626,447
Fence stay, H. W. Dorsett 626,599
Fender. See Car fender. Cultivator fender.
Fifth wheel, T. H. C. Beall 626,215
File, W. L. Smith 626,508
Filter, Cook & Cobocon 626,487
Filter, H. A. Pooler 626,244
Fire alarm instrument, R. G. Callum 626,318
Fire alarm system, automatic, Callum & Fritch 626,364
Firearm, J. Stapf 626,310
Fire hose nozzle, B. C. Crane 626,596
Fireproof floor and ceiling, O'Meara & Calvert 626,560
Fireproof wall studding, A. P. Whittemore 626,583
Flat iron protecting shield, J. B. Miller 626,286
Flower stand, A. F. Varns 626,513
Follower, split, J. F. Collins 626,366
Food warmer, W. & A. Castle 626,219
Foot rail bracket, M. Bast 626,214
Fountain. See Soda fountain.
Fruit cleaner, J. W. Hendrix 626,613
Fuel, apparatus for combustion of, F. Kluge 626,386
Furnace. See Heating furnace. Heating or roasting furnace.
Furnace attachment, ore roasting, J. T. Hutson. 626,281
Furnace, door and deflector plate for steam boiler, Horspool & Kelly 626,280
Furniture, A. J. Kearns 626,429
Fuse removing and replacing device, C. L. Duenkel 626,371
Gage. See Eyeglass gage.
Gaging machine for spherical bodies, G. H. Hathorn 626,539
Game apparatus, Kroscher & Olsen 626,528
Garbage receptacle and closet for same, C. S. Robinson 626,567
Gas burner, L. S. Lawson 626,387
Gas burner heating attachment, L. G. McKam 626,243
Gas generator, acetylene, O. Archambault 626,477
Gas generator, acetylene, Baldwin & Crastin 626,586
Gas generator, acetylene, T. A. Bryan 626,363
Gas generator, acetylene, J. Grand 626,608
Gas generator, acetylene, L. D. Jennings 626,384
Gas generator, acetylene, U. Kesselring 626,237
Gas generator, acetylene, L. O. McLane 626,437
Gas generator and lamp, acetylene, C. K. Harding 626,324
Gas lighting apparatus, E. H. C. Oehlmann 626,558
Gas lighting apparatus, automatic, Rosinski & Ducruix 626,247
Gas producer, G. R. Hislop 626,279
Gate. See Wire gate.
Gate, E. G. Cameron 626,269
Gear, reversing, C. C. Riotte 626,395
Gearing, antifriction, C. Whitney 626,515
Gearing, variable speed, H. Smith 626,444, 626,445
Generator. See Acetylene generator. Gas generator.
Glass vessels, machine for making, R. & R. Good, Jr 626,464
Glove, J. A. Vogan 626,353
Gold tubing, manufacture of silver lined, J. J. Sommer 626,348
Golf club, W. L. Smith 626,347
Governor, engine, H. Lentz 626,546
Grain bundle shocker, automatic, J. E. & O. A. French 626,653
Grate bar, hollow, G. S. Lee 626,657
Grinding machine, E. Mills 626,436
Grinding machine, C. H. Norton 626,337
Gun converter, shot, C. Trossy, femme Granetias 626,351
Gun, magazine target, J. L. McCullough 626,501
Hammer, pneumatic, E. C. Meissner 626,497
Hammock, C. K. Hann 626,610
Handle. See Bottle handle.
Handle for demijohns, etc., B. Boley 626,407
Hanger. See Cycle hanger. Hat hanger.
Hat, coat, and umbrella rack, L. A. McCord 626,335
Hat fastener, W. J. Hayes 626,379
Hat hanger, J. E. Fitzgerald 626,416
Hat pin, safety, E. M. Sleight 626,507
Hay knife, M. H. Bermes 626,522
Heater. See Water heater.
Heating furnace, A. Johnson 626,405
Heating or roasting furnace, W. E. Roberts 626,632
Heddle making machine, F. B. Shuster 626,571
Hobby horse, A. C. Peterson 626,297
Hook. See Checkrein hook. Lifting hook.
Horse controlling apparatus, A. Whelan 626,581
Horse overshoe, J. Ricks 626,245
Horse tail holder, G. T. Elkins 626,600
Horses, device for stopping runaway, A. B. J. Brown 626,317
Horses' heads, storm or sunshade for, S. C. Horn 626,424
Horses' feet, device for treating, C. A. Stuart 626,313
Hose bridge, folding and interlocking, J. Greenhouse 626,421
Household use, combination article for, McLaughlin & Williams 626,553
Hydrocarbon burner, J. E. Bancroft 626,405
Hydrocarbon burner, G. M. Swarthout 626,509
Ice cream mould and measure, F. E. Schmits 626,468
Ice motor, Farr & Nyberg 626,322
Indicator. See Railway indicator.
Indigo, making, B. Heymann 626,231
Inkstand, H. B. Brownell 626,218
Insulator, Carpenter & Tonn 626,592
Ironing board, J. Hovsepian 626,493
Ironing board, C. H. Smith 626,638
Ironing device, G. A. McLane 626,391
Jack, G. B. Gallagher 626,605
Knife. See Hay knife.
Ladder and truck, extension, O. E. Hegstad 626,277
Ladder lock, extension, E. C. Bishop 626,264
Lamp, bicycle, E. D. Middlekauff 626,627
Lamp filament and manufacturing same, incandescent, T. A. Edison 626,460
Lamps, weatherproof socket for incandescent electric, W. C. Bryant 626,588
Latch, M. Duven 626,530
Lead, producing neutral chromate of, C. Luckow. 626,331
Lead, producing peroxide of, C. Luckow 626,330
Lemon squeezer, E. D. Middlekauff 626,626
Letter box, Teevan & Hoyne 626,251
Letter box lock cover, street, C. Bomberger 626,266
Life preserver, K. E. Landau 626,283
Lifter. See Pie plate lifter.
Lifting hooks, stevedore's, C. M. Tiffany 626,350
Liquids from fibrous materials, apparatus for separating, Bodmer & Schwarzenbach 626,523
Lock. See Bicycle lock. Ladder lock. Sash lock. Seal lock.
Lock, J. W. Haglund 626,376
Lock, W. S. Houser 626,616
Lock, B. Phelps ..... 626,338 to 626,344
Locomotive engine, J. E. Roberts 626,566
Loom, A. Morell 626,499
Loom, Wever & Seel 626,314
Loom, box, H. Talks 626,510
Loom warp stop motion detector, G. O. Draper 626,412
Lubricator, G. J. Miller 626,498
Lunch box, folding, R. Rayby 626,563
Lung tester, Beal & Brown 626,659
Manifold pad, H. Whitfield 626,259

(Continued on page 400)

Advertisements.

ORDINARY RATES.

Inside Page, each insertion, - 75 cents a line
Back Page, each insertion, - - $1.00 a line

☞ *For some classes of Advertisements, Special and Higher rates are required.*

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

Star ★ Lathes
Foot power Screw... ...cutting Automatic Cross feed
9 and 11-inch Swing.
New and Original Features
Send for Catalogue B.
Seneca Falls Mfg. Company,
695 Water St., Seneca Falls, N.Y.

AMERICAN PATENTS.—AN INTEResting and valuable table showing the number of patents granted for the various subjects upon which petitions have been filed from the beginning down to December 31, 1894. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1002.** Price 10 cents. To be had at this office and from all newsdealers.

POWER & FOOT LATHES. SHAPERS, PLANERS, DRILLS, MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

Foot Power and TURRET LATHES, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 133 W. 2d St., Cincinnati, O.

TOOLS
Every kind of Tool for Steam, Gas, and Water Fitters. Every Tool has our personal guarantee. We have been the Leading Tool Manufacturers for Fifty Years . . .
WALWORTH MFG. CO.,
20 OLIVER STREET, BOSTON, MASS.



PRESSES, DIES and SPECIAL MACHINERY
For Sheet Metal Workers.
WEST MFG. COMPANY,
Buffalo, N. Y., U. S. A.

A PICTURE OF A TRAP
and when it has the Heintz Trade Mark—and our name—it's the greatest steam-saver in use. We're prepared to prove it. We'll take your plant, send you as many Heintz as you need on approval, tell you how to properly install them, and if you do it right, guarantee steam-saving and fuel economy. If you're at all anxious to know how this proposition has worked with others, let us send you a copy of our little booklet—Vol. "H"—after you've read it, you'll probably pass it around.
Wm. S. Haines Company,
136 S. Fourth St.
Philadelphia, Pa.

ADAMS PAPER COMPANY, WELLS RIVER, VT., say: The Heintz steam-savers have effected a saving of 40 per cent: in coal since we attached them. As this is a water driven mill and we use steam only for drying and cooking our stock, the saving is remarkable.

BARNES' New Friction Disk Drill.
FOR LIGHT WORK.
Has these Great Advantages:
The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. Send for catalogue.
W. F. & JNO. BARNES CO.,
1999 Ruby St., - Rockford, Ill.

can mix paint—and that's one trouble with most homemade mixtures;—it isn't the way to get uniformity of color and wearing properties.
PECORA FLAT STEEL COLOR is a scientific mixture for the particular machine builder. If you're particular, read our booklet.
PECORA PAINT CO.,
PHILADELPHIA.
You would use PECORA BLOW HOLE CEMENT if you read our circular. 119-9.

"American-Hunnings" TELEPHONES.
Transmitters, Magneto Bells and Telephone Switchboards. Over **200,000** of our telephones in successful operation. Used by War and Navy Departments. In ordering state length of line, whether single line or metallic circuit and number of telephones to be used on one line. ☞ *Send for catalogue "S. A."*
AMERICAN ELECTRIC TELEPHONE CO.,
173 South Canal St., Chicago, Ill.

Buy Telephones
THAT ARE GOOD—NOT "CHEAP THINGS."
The difference in cost is little. We guarantee our apparatus and guarantee our customers against loss by patent suits. Our guarantee and instruments are **both good.**
WESTERN TELEPHONE CONSTRUCTION CO.
250-254 South Clinton St., Chicago.
Largest Manufacturers of Telephones exclusively in the United States.



"Universal" Kneading and Mixing Machines
Over 6200 in use. Over 300 varieties in 155 different industries.
Patented in all countries.
WERNER & PFLEIDERER
Saginaw, Mich. Builders of all kinds of Chemical Machinery, also at Cannstatt, London, Vienna, Berlin, Paris and Moscow.
83 *Highest International Awards*



PARALLEL DIVIDERS
with MICROMETER ADJUSTMENT
Excellent for laying out work on a surface as it comes from planer, etc. Will read to 1-1000 of an inch

PRICE, POSTPAID.	
Tool alone,	$2.00
Pump Center,	.25
Pencil Holder,	.50
Long Bar to scribe 24-in. circle,	.50
Needle Point,	.50

Our book entitled "Shop Pointers," is free for the asking. Contains description of our entire line of Tools, Valuable Tables, Recipes, etc.



J. STEVENS ARMS & TOOL COMPANY,
P. O. Box 16,
Chicopee Falls, Mass., U. S. A.

WILLIAMS' SHAVING SOAP

You instantly recognize WILLIAMS' SHAVING SOAP. It is impossible to mistake its thick, creamy, softening lather or its delicate, refreshing odor, for there is nothing else like it. Under its soothing influence shaving becomes a lathery luxury, and a feeling of intense satisfaction takes possession of you.
WILLIAMS' SHAVING SOAPS are used by all first-class barbers, and are for sale all over the world.
The J. B. Williams Co., Glastonbury, Ct.
Depots: London, Paris, Dresden, Sydney.

MACHINES FOR ROLLING SCREW THREADS.
Any size up to 1" diameter, 3" long. Four sizes of machines.
☞ *Send for Circulars.*
BLAKE & JOHNSON,
P. O. Box 7. Waterbury, Conn.



HIGH GRADE WOODWORKING MACHINERY

Single Machines or Complete Equipments for Any Class of Work.
Your Correspondence is Solicited.
☞ Illustrated Matter and Prices on application.
J. A. FAY & CO.
10-30 John St., CINCINNATI, OHIO

CHRISTIANA MACHINE COMPANY,
Christiana, Pa., U. S. A.
Established 1862.
Engineers, Founders, and Machinists,
Manufacturers of
TURBINE WATER WHEELS, adapted to all duties.
Power Transmitting Machinery, Gearing, Rope Wheels, Friction Clutches, Shafting, Pulleys, Hangers, etc. ☞ *Catalogues on application.*

Tools for Fine or Rough Work



Tools that are common and Tools that are rare, costly and cheap Tools, and every other kind of Tool used in any trade you will find described and illustrated in **MONTGOMERY'S TOOL CATALOGUE FOR 1898.** A handsome book containing 510 pages and copious index. Pocket size 6¼ x 4¼ inches, with rounded edges and stitched covers. Every workshop and factory in the country should have one. Sent by mail for 25 cents by
MONTGOMERY & CO.
105 Fulton Street, New York.

MILLING CUTTERS

of all styles and sizes for slitting, slotting, face and side milling, forming, tool making and manufacturing.
Cutters solid, with inserted blades, interlocked, single and in gangs. Reamers, Taps and Dies.
THE PRATT & WHITNEY CO., Hartford, Conn., U. S. A.

NEW BINOCULAR.

(The Trieder.)
Small as an opera glass. More powerful than the largest field glass. *Send for Circulars.*
QUEEN & CO.
Optical and Scientific Instrument Works,
1010 Chestnut Street,
NEW YORK: 59 Fifth Ave. PHILADELPHIA, PA.

The "1898 Patent" Independent Lathe Chuck
Does the heaviest as well as ordinary work. Well proportioned in all parts and extremely strong. Jaws reversible in all sizes. Jaw steps are ground true in the chuck after jaws have been case-hardened. Jaw screws are of large diameter and have a fine pitch thread. Workmanship and materials excellent. This chuck has the strongest grip of any on the market. ☞ *Send for Catalogue.* **SKINNER CHUCK CO., Church St., New Britain, Conn.**



MACHINERY
NEW AND SECOND-HAND,
FOR SALE CHEAP.

Hoisting Engines, Air Compressors, Rock Drills, Crushers, Dump Cars, Steam Shovels, Light Locomotives, Relaying Rail, etc.
Send for printed leaflet just issued.
WILLIS SHAW, 678 N. Y. Life Bldg., CHICAGO.

HARRINGTON & KING PERFORATING Co.
WE CAN DELIVER RAPIDLY PERFORATED SHEET-METALS OF EVERY DESCRIPTION. CUT TO NAME THICKNESS OF METAL, SIZE AND SHAPE OF HOLE.
225 NORTH UNION ST. CHICAGO, ILL. U.S.A.

© 1899 SCIENTIFIC AMERICAN, INC.

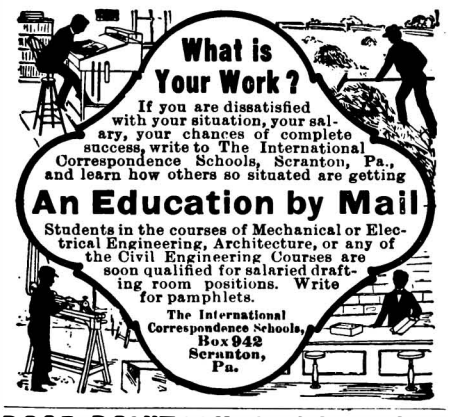

What is Your Work?

If you are dissatisfied with your situation, your salary, your chances of complete success, write to The International Correspondence Schools, Scranton, Pa., and learn how others so situated are getting

An Education by Mail

Students in the courses of Mechanical or Electrical Engineering, Architecture, or any of the Civil Engineering Courses are soon qualified for salaried drafting room positions. Write for pamphlets.

The International Correspondence Schools, Box 942 Scranton, Pa.

ROSE POLYTECHNIC INSTITUTE

A College of Engineering. Mechanical, Electrical, Civil Engineering; Chemical Courses; Architecture. Extensive shops. Modernly equipped laboratories in all departments. Expenses low. 17th year. For catalog address C. L. MEES, President, Terre Haute, Ind.

"Papa says I can be his private secretary now
The Smith Premier Typewriter
is so easily learned and does such clean, perfect work."
The Smith Premier Typewriter Co.
SEND FOR ART CATALOGUE. Syracuse, N.Y., U.S.A.

The Typewriter Exchange

1⅛ Barclay St., NEW YORK
124 La Salle St., CHICAGO
38 Bromfield St., BOSTON
817 Wyandotte St., KANSAS CITY, MO.
209 North 9th St. ST. LOUIS, MO.

We will save you from 10 to 50% on Typewriters of all makes.
☞ *Send for Catalogue*

The Yankee DRILL GRINDER

for grinding both Twist and Flat Drills. Grinds all sized drills from ⅛ to 2¼ in. Can be set for any size in a few seconds. Gives any desired clearance. Fully guaranteed. **"Can't Grind Wrong."** *Catalog free.*
G. T. EAMES COMPANY,
250 Asylum Ave., **Kalamazoo, Mich.**

NO OVERFLOW!



is possible in any refrigerator pan or other receptacle for running water when the pan is fitted with the
Knapp Refrigerator Alarm
Prevents damage to carpets, floors, ceilings, etc. The rising water makes electrical contact which rings bell continuously until stopped. Outfit consists of 1 attachment over pan, 1 bell, 1 dry battery, 12 feet insulated wire. Complete $1.00. Agents wanted. Knapp Electric and Novelty Co., 125 White Street, New York.

PLATING & DYNAMOS.



We manufacture a full line of Plating Dynamos. The accompanying cut represents our smallest size Type M 00, which has an output of 18 amperes at 6 volts. It will plate 15 sq. ft. of nickel per hour. Our larger sizes—multipolar machines—are built with the same thoroughness and attention to details that characterize the construction of our motors and dynamos.
Send for Bulletin No. 104 S.
THE HOLTZER-CABOT ELECTRIC CO., Boston, (Brookline), **Mass.**

MIETZ & WEISS

KEROSENE and GAS Engine

The most economical power known. Absolutely safe and reliable. Runs with common kerosene. Perfectly automatic. Patented 1897, U. S. and European countries.
Send for Catalogues.
128-132 Mott St., New York.

THE ELECTRIC HEATER.—A VALUable paper, with working drawings of various forms of the electrical heaters, including electric soldering iron, electric pad for the sick, etc. 6 illustrations. SCIENTIFIC AMERICAN SUPPLEMENT **1112**. Price 10 cents. For sale by Munn & Co. and all newsdealers.

$1 YEARLY FOR REPAIRS!

It has been found that it costs a trifle less than $1 per year to keep our **HOISTING ENGINES** in repair. That speaks well for their superior make and durability, doesn't it? There is no more economical or serviceable engine made for mines, quarries, docks, etc. Much cheaper than steam. Both friction and geared hoist 6 to 150 H. P. *Send for Catalogue.* **Weber Gas & Gasoline Engine Co.,** 402 S.W. Boulevard, Kansas City, Mo.

Match machine, W. E. Cook	626,457, 626,458
Mechanical device, F. K. Gaff	626,604
Mechanical movement, C. C. Protheroe	626,345
Metal plate shaping machine, J. C. Sotter	626,574
Metal shearing machine, G. B. Tennant	626,448
Metal wheel, W. C. Waterbury	626,254
Meter. See Electric meter. Water meter.	
Milk, preserving, L. Clerc	626,486
Mill. See Pulverizing mill. Windmill.	
Mould. See Ice cream mould.	
Moulding, ornamenting, and graining machine, combined, C. E. Seckford	626,305
Mop wringer, Bomnlender & Herkert	626,267
Motor. See Electric motor. Ice motor.	
Music box with interchangeable music disks, automatic, E. Breslauer	626,482
Musician's wire cutting device, C. W. McCarter	626,334
Nut lock, J. P. Daly	626,271
Nut wrench, M. O. Goodpasture	626,228
Oil and making same, synthetic violet, J. Ziegler	626,585
Oiler, gravity center, W. W. Nugent	626,291
Ore crusher, J. F. Keyton	626,326
Organ, pipe, A. B. Felgemaker	626,415
Organ, pneumatic, M. Clark	626,320
Organ register stop, pipe, A. B. Felgemaker	626,414
Overshoe, A. E. Roberts	626,299
Packing case cushioning pad, H. J. Mark	626,240
Pad. See Manifold pad. Packing case cushioning pad.	
Paper bag machine, J. Doering	626,369
Paper bag machine, C. E. Dulin	626,372
Paper bag making machine, W. Carter	626,319
Paper feeding machine, Philpott & Briggs	626,631
Pharmaceutical compound and making same, A. Eichengrun	626,413
Phonograph cylinder cabinet, E. U. Kinsey	626,543
Photographic burnisher, U. Nehring	626,555
Photographic film roll, C. Whitney	626,356, 626,357
Picture exhibitor, coin controlled, C. T. Hunt	626,425
Pie plate lifter, W. P. Murphy	626,289
Pin. See Hat pin.	
Pipe. See Blowpipe. Tobacco pipe.	
Pipe wrench, S. L. Wiegand	626,401
Pistol and knife, combined, J. C. White	626,472
Piston, expansible lubricating, W. Hay	626,611
Planter and fertilizer distributer, combined cotton seed, A. G. Perry	626,561
Planter, potato, H. Halter	626,229
Planter rein and drawrope attachment, W. Douglas	626,225
Plaster, etc., composition of matter for wall, F. Boas	626,481
Plow seeder attachment, gang, J. E. Beach	626,453
Pole climber, D. A. Jones	626,542
Preservative compound, E. May	626,435
Press. See Baling press.	
Press for expressing liquids from solids, L. Baggett	626,646
Printing form, C. M. Bowman	626,649
Printing in colors, machine for, L. Chambon	626,270
Propelling mechanism, boat, F. Schultz	626,304
Pulverizing mill, centrifugal, F. G. Johnson	626,426
Pump regulator, J. Boylston	626,217
Pump valve actuating mechanism, steam, J. K. Dean	626,652
Pumping apparatus, wave power, J. E. & W. Armstrong	626,452
Punching machine, T. B. Blair	626,362
Rack. See Clothes rack. Hat, coat, and umbrella rack.	
Rail bond, electric, S. H. Harrington	626,377, 626,378
Rail joint fastening, E. L. Arnold	626,358
Railway carriage coupling, K. Zwart	626,263
Railway indicator, M. Morrow	626,467
Railway switch, Taylor & Voynow	626,250
Railway tie, metallic, J. M. Hoon	626,233
Railway tracks, metallic cross tie for, S. Hazard	626,612
Rake attachment, hay, A. F. Martin	626,434
Ribbon, mechanism for periodically displacing flexible, C. Faure	626,532
Rod and cable coupling, W. Connelly	626,527
Roller. See Shade roller.	
Rolling sheet metal cylinders, machine for, Whittle & Layng	626,260
Rolling sheet metal ridge strips, machine for, G. D. Kimberly	626,617
Rotary engine, J. Bodam	626,216
Rotary engine, E. W. Collins	626,595
Rudder locking mechanism, G. H. Doyle, Jr	626,370
Sash lock, window, J. R. Oakley	626,503
Saw grinding machine, Alden & Pratt	626,451
Saw guide, C. Palmleaf	626,293
Saw, hack, E. E. Euchenhofer	626,531
Saws, insertible tooth for diamond, H. Forster	626,533
Sawing machine, H. Schroer	626,303
Scale, price of money weight, A. R. Beal	626,320
Scissors guide, L. A. Noble	626,336
Seal, car, A. P. Miller	626,628
Seal lock, C. H. Connolly	626,650
Seat post, spring, J. N. Smith	626,396
Separator for granular or like materials, W. Settner	626,306
Sewing machine, W. H. Stedman	626,311, 626,312
Sewing machine, H. R. Tracy	626,470
Sewing machine, A. Wood	626,316
Sewing machine work holder, hat, F. W. Cheetham	626,456
Shade roller and lock, combination, H. M. Sturgis	626,577
Shaft coupling, J. C. Cramp	626,223
Shield, built up, J. Zinn	626,402
Shipping can or package, Rowland & Harrison	626,568
Shipping case, J. B. Hopper	626,325
Ships' logs, rotator for, J. L. Bliss	626,406
Shoe fastening, E. Bally	626,404
Shoe plate, H. P. Stoy	626,576
Shutter, window, H. White	626,449
Sign, W. M. Webb	626,256
Signaling, electrical, S. De Jager	626,494
Skirt fastener and supporter, combined, C. M. Durnell	626,273
Smelters, apparatus for catching waste products from lead, silver, or other, W. Sergeant	626,569
Soap holder, F. E. Hoffmann	626,540
Soda fountain, F. W. Williamson	626,315
Spraying plants, etc., device for, J. H. Taylor	626,469
Sprinkling device, J. H. Loomis	626,495
Square, tailor's, J. H. White	626,258
Stacker, straw, A. Van Houweling	626,380
Stand. See Adjustable stand. Christmas tree stand. Flower stand.	
Standard holder, K. Gentner	626,607
Steam boiler, P. W. Burke	626,526
Steam pipes for heating dry kilns, C. M. Cunliffe	626,410
Steering gear, L. Brown	626,483
Stone, wire cable for cutting, L'Hoir & Deham	626,621
Store service apparatus, H. M. Weaver	626,275
Stove attachment, D. Y. Bruneau	626,485
Sugar from beets, manufacturing granulated, Oxnard & Baur	626,292
Switch. See Railway switch.	
Switch card receiver, L. G. Given	626,534
Switches, automatic gravity lock for, J. G. Sorenson	626,573
Table leg clamping device, W. B. McLean	626,554
Tag, dry goods, O. Seyd	626,249
Tap, A. Johnson	626,385
Target gallery and appliance, J. L. McCullough	626,500
Telegraph receiver or relay, J. Gallegos	626,606
Telephone, Payne & Keller	626,629
Telephone call bells, auxiliary electric alarm for, M. M. Humphrey	626,382
Telephone system, W. D. Gharky	626,462, 626,463
Telephones, circuit and apparatus for bridging, C. T. Mason	626,624
Tenpin ball, H. G. Wilmerling	626,584
Thill coupling, O. W. Linstrum	626,622
Thill coupling, L. G. Mayer	626,548
Thill iron, E. R. Reamer	626,564
Thyroid extract and making same, E. Baumann	626,648
Tie. See Railway tie.	
Tire bolt wrench, T. E. Stockford	626,446
Tire cooler, A. C. Schodorf	626,505
Tires, tool for inserting valve stems in pneumatic, A. Whisler	626,582
Tobacco pipe, F. L. Shunk	626,570
Tobacco setter, hand, C. G. Higgins	626,614
Tool, combination, D. M. Humiston	626,381
Tooth and plate, artificial, G. H. Modemann	626,287
Tooth regulating device, E. H. Angle	626,476
Torch, signaling, C. E. Masten	626,241
Transom lifter, W. T. Adams	626,213
Tray and portable tray shelf, convertible, L. Vaughan	626,641
Truck, car, G. C. Murray	626,552
Truck, hand, F. J. Mason	626,332
Typewriter platen, T. R. Nolan	626,556
Typewriting machine, C. D. Wallace	626,354
Typewriting machine attachment, W. Cooper	626,221
Underwaist, L. E. Hacherelle	626,422
Valve, G. F. Godley	626,420
Valve, G. W. Mowry	626,550
Valve and pump governor, reducing, J. L. Chapman	626,594
Valve, boiler check, A. W. Cash	626,593
Valve, dry service, Gray & Cox	626,654
Valve gear for slide valves, S. W. Wilkinson	626,261
Valve, triple, J. H. Farrell	626,601
Vapor burner, self generating, Glud & Nielsen	626,375
Vapor burning apparatus, A. Kitson	626,282
Vehicle, C. H. Barrows	626,587
Vehicle, manually propelled, J. S. Lamar	626,620
Vehicle, self propelled, E. J. Pennington	626,294
Vehicle wheel, C. D. Cannon	626,591

(Continued on page 401)

Summer Suggests "Adlake" Cameras.

Adlake Camera Photography is distinctly the simplest, easiest, most perfect and least expensive for all amateurs. Adlakes are best for every person who does not wish to do professional work. New Adlake Booklet tells you all about them. Free for a postal. We will send Adlakes, express paid, anywhere in the United States upon receipt of price.

Free with all Adlakes—New Adlake Metal Shutter; Portrait Attachment; Device for making Panoramic Pictures. New Multiplex Attachment for taking 2 to 4 pictures of same object in different positions on one plate, $1 extra.

Adlake Regular, 3¼x4¼,	With 12 Metal Light-tight Plate Holders,	**$6.50**
Adlake Regular, 4x5,	With 12 Metal Light-tight Plate Holders,	**$10.00**
Adlake Special, 4x5,	With 12 Aluminum Light-tight Plate Holders,	**$12.00**
Adlake Repeater, 3¼x4¼,	Takes 12 pictures in 10 seconds if you wish,	**$5.50**
Adlake Repeater, 4x5,	Takes 12 pictures without opening the box,	**$8.00**



Glass Plates Cost Half the Price of Films.
The Adams & Westlake Co., 108 Ontario St., Chicago
Makers of Adlake Bicycles. X-Ray Cycle Oil Lamps. Adlake Acetylene Cycle Lamps.

SO SIMPLE A CHILD CAN USE THEM.
SUNART CAMERAS
28 STYLES. PRICES FROM $5.00 TO $50.00
SEND 2¢ STAMP FOR ILLUSTRATED CATALOGUE.
SUNART PHOTO CO. 5 AQUEDUCT ST ROCHESTER N.Y.

ACETYLENE GAS AND CARBIDE OF Calcium.—All about the new illuminant, its qualities, chemistry, pressure of liquefaction, its probable future, experiments performed with it. A most valuable series of articles, giving in complete form the particulars of this subject. Details of furnaces for making the carbide, gas generators, gasometers, burners, etc. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **998, 1004, 1007, 1012, 1014, 1015, 1016, 1022, 1035, 1038, 1057, 1064, 1071, 1072, 1082, 1083, 1084, 1085, 1086, 1104, 1124, 1132, 1149** and **1150**. Price 10 cents each, by mail, from this office, and all newsdealers.

A. W. FABER
Manufactory Established 1761.
LEAD PENCILS, COLORED PENCILS, SLATE PENCILS, WRITING SLATES, STEEL PENS, GOLD PENS, INKS, PENCIL CASES IN SILVER AND IN GOLD, STATIONERS' RUBBER GOODS, RULERS, COLORS AND ARTISTS' MATERIALS.
78 Reade Street. - - - New York, N. Y.
Manufactory Established 1761.

N. Y. CAMERA EXCHANGE.



50% Saved on all makes of Cameras
Headquarters for Buying, Selling and Exchanging Cameras or Lenses. Large assortment always on hand.
Developing, Printing, etc.
Photo supplies of every description at *lowest prices.*
☞ *Send 2c. stamp for bargain list.* Address
N. Y. CAMERA EXCHANGE, 43 Fulton St., NEW YORK

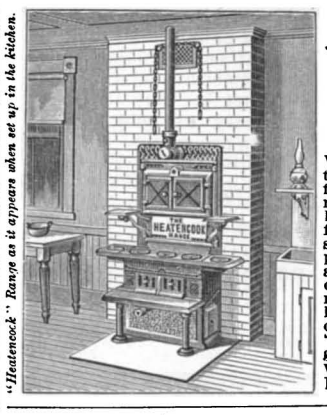

THE "HEATENCOOK" RANGE
HOUSE HEATING FROM THE KITCHEN FIRE BY HOT WATER.

The "Heatencook" Range is a **Combined Cooking Stove** and **Hot Water Heater.** It is unequaled as a cook stove. It bakes, roasts, etc., to perfection. The range is made in the most substantial manner and is finished in first-class style. It is not an ordinary range with an attachment, but is designed especially as a heater and cooking stove combined. It weighs 2000 lbs. and is six feet high. An adjustable fire-pot is provided for summer or winter use. It is perfect in all respects, and is protected by several patents. **The house is heated by hot water.** Radiators are placed in the different rooms and connected to the "Heatencook" by flow and return pipes. In summer time the radiators remain full of water, the circulation of water being stopped by closing valves attached to each radiator, the radiators remaining cold. The "Heatencook" system will heat an entire house of moderate size—only one fire in the house. Plenty of hot water for bath and kitchen sink. Very economical in fuel. The "Heatencook" has been in use for five years. About 1000 ranges are now giving the greatest satisfaction in many most delightful homes. It is just what you want. Send for catalogue and get all particulars. Address
BROOMELL, SCHMIDT & CO., Limited, Box 135, **YORK, PA.**

This boats Wind, Steam, or Hot Power.
We offer the **WEBSTER 2½** actual horse power
GAS ENGINE
for **$150**, less 10 per cent discount for cash. Built on interchangeable plan. Built of best material. Made in lots of 100 therefore we can make the price. Boxed for shipment, weight 800 lbs. Made for Gas or Gasoline. Also Horizontal Engines, 4 to 30 h. p.
WEBSTER MFG. CO., 1074 West 15th St., Chicago.
Eastern Branch: 38-D Dey Street, New York City.
Southern Agents: Boland & Gschwind Co., Ltd., So. Peter and Lafayette Sts., New Orleans, La.
Write for Special Catalogue

OUR MARINE MOTORS are GUARANTEED to GIVE SATISFACTION.
Durable in Construction and Easy and Safe in Operation.
☞ *Send for Catalogue and investigate our claims.*

TRUSCOTT BOAT MFG. CO., St. Joseph, Mich., U. S. A.

WELL DRILLING Machines
Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.
WILLIAMS BROS., Ithaca, N. Y.

"WOLVERINE" GAS & GASOLINE ENGINES
STATIONARY AND MARINE.

The "Wolverine" is the only reversible marine gas engine on the market. It is the lightest engine for its power. Requires no licensed engineer. Absolutely safe. Manufactured by
WOLVERINE MOTOR WORKS,
12 Huron St., Grand Rapids, Mich.

MORAN FLEXIBLE JOINT
for Steam, Air or Liquids.
Made in all sizes to stand any desired pressure. *Send for reduced price list.*
Moran Flexible Steam Joint Co., Inc'd
147 Third Street, LOUISVILLE, KY.

This double-slope causes the expanding ice to slide into the air-dome, taking the strain off the pipe. The air-cushion also prevents "Hammering." Covered by U. S. and Foreign Patents.

Burst Water Pipes a Thing of the Past

You can now make all water pipes as secure from bursting in winter as in summer. This pneumatic system is the only one which successfully prevents the annoying and costly bursting of water pipes. It has solved a great economic problem. Highly endorsed by Architects, Engineers and Municipal Officials. No new house should be completed without this system, and all house owners should avail themselves of this "ounce of prevention" in season.
☞ *Send for Illustrated Booklet, giving full explanation and discount.*
THE PNEUMATIC DOME MANUFACTURING COMPANY,
501 E Street, Northwest, Washington, D. C.

GOLD, SILVER, NICKEL AND METAL PLATING

NEW QUICK PROCESS. MODERN METHODS. PROFITS IMMENSE. **You can positively make $5 to $15 a day,** at home or traveling, doing Plating and selling **Prof. Gray's Plating Outfits, Dynamos, etc. Unequaled for plating watches, jewelry, tableware, bicycles, all metal goods.** Heavy plate. **Warranted. No experience necessary.**
LET US START YOU IN BUSINESS. We do plating ourselves. Have experience. Manufacture the only practical outfits, including dynamos, tools, lathes and materials. **All sizes complete.** Ready for work when received. **Guaranteed.**
WE TEACH YOU the art, furnish recipes, formulas and **trade secrets FREE.** Failure impossible. **THE ROYAL, OUR NEW DIPPING PROCESS.** Quick. Easy. Latest method. Goods dipped in melted metal, taken out instantly with finest, most brilliant plate, ready to deliver. Thick plate every time. **Guaranteed 5 to 10 years. A boy plates from 200 to 300 pieces tableware daily. No polishing, grinding or work necessary. DEMAND FOR PLATING IS ENORMOUS. Every manufacturer, jeweler, storekeeper** and **business man** has goods to plate. **Every family, hotel** and **restaurant** have goods plated instead of buying new. It's cheaper and better. **You will not need to canvass.** Our agents have all the work they can do. People bring it. **You can hire boys cheap to do your plating,** the same as we, and solicitors to gather work for a small per cent. Replating is honest and legitimate. Customers always delighted. **WE ARE AN OLD ESTABLISHED FIRM.** Been in business for years. Know what is required. **Our customers have the benefit of our experience. WE ARE RESPONSIBLE and Guarantee Everything.** Reader, here is a chance of a lifetime to go in business for yourself. **WE START YOU. Now is the time to make money.**
Sample of tableware plated on our machine for two-cent stamp.
WRITE TO-DAY. Our New Plan, Testimonials, and Circulars FREE. Don't wait. Send us your address anyway. Address
D. V. GRAY & CO., PLATING WORKS, 505 Elm St., CINCINNATI, OHIO

© 1899 SCIENTIFIC AMERICAN, INC.

JUST PUBLISHED.

Mechanical Movements

POWERS, DEVICES AND APPLIANCES.

By GARDNER D. HISCOX, M. E.

Author of "Gas, Gasoline and Oil Engines."

Large 8vo. 402 Pages. 1649 Illustrations, with Descriptive Text. PRICE, $3.00.

A dictionary of Mechanical Movements, Powers, Devices, and Appliances, with 1649 illustrations and explanatory text. This is a new work on illustrated mechanics, mechanical movements, devices, and appliances, covering nearly the whole range of the practical and inventive field, for the use of Mechanics, Inventors, Engineers, Draughtsmen, and all others interested in any way in mechanics.

—SECTIONS.—

1. **Mechanical Powers.**—Weights, Revolution of Forces, Pressures, Levers, Pulleys, Tackle, etc.
2. **Transmission of Power.**—Ropes, Belts, Friction Gear, Spur, Bevel, and Screw Gear, etc.
3. **Measurement of Power.**—Speed, Pressure, Weight, Numbers Quantities, and Appliances.
4. **Steam Power—Boilers and Adjuncts.**—Engines, Valves and Valve Gear, Parallel Motion Gear, Governors and Engine Devices, Rotary Engines, Oscillating Engines.
5. **Steam Appliances.**—Injectors, Steam Pumps, Condensers, Separators, Traps and Valves.
6. **Motive Power—Gas and Gasoline Engines.**—Valve Gear and Appliances, Connecting Rods and Heads.
7. **Hydraulic Power and Devices.** Water Wheels, Turbines, Governors, Impact Wheels, Pumps, Rotary Pumps, Siphons, Water Lifts, Ejectors, Water Rams, Meters, Indicators, Pressure Regulators, Valves, Pipe Joints, Filters, etc.
8. **Air Power Appliances.**—Wind Mills, Bellows, Blowers, Air Compressors, Compressed Air Tools, Motors, Air Water Lifts, Blow Pipes, etc.
9. **Electric Power and Construction.**—Generators, Motors, Wiring, Controlling and Measuring, Lighting, Electric Furnaces, Fans, Search Light and Electric Appliances.
10. **Navigation and Roads.**—Vessels, Sails, Rope Knots, Paddle Wheels, Propellers, Road Scraper and Roller, Vehicles, Motor Carriages, Tricycles, Bicycles, and Motor Adjuncts.
11. **Gearing.**—Racks and Pinions, Spiral, Elliptical, and Worm Gear, Differential and Stop Motion Gear, Epicyclical and Planetary Trains, "Ferguson's" Paradox.
12. **Motion and Devices Controlling Motion.**—Ratchets and Pawls, Cams, Cranks, Intermittent and Stop Motions, Wipers, Volute Cams, Variable Cranks, Universal Shaft Couplings, Gyroscope, etc.
13. **Horological.**—Clock and Watch Movements and Devices.
14. **Mining.**—Quarrying, Ventilation, Hoisting, Conveying, Pulverizing, Separating, Roasting, Excavating, and Dredging.
15. **Mill and Factory Appliances.**—Hangers, Shaft Bearings, Ball Bearings, Steps, Couplings, Universal and Flexible Couplings, Clutches, Speed Gears, Shop Tools, Screw Threads, Hoists, Machines, Textile Appliances, etc.
16. **Construction and Devices.**—Mixing, Testing, Stump and Pile Pulling, Tackle Hooks, Pile Driving, Dumping Cars, Stone Grips, Derricks, Conveyor, Timber Splicing, Roof and Bridge Trusses, Suspension Bridges.
17. **Draughting Devices.**—Parallel Rules, Curve Delineators, Trammels, Ellipsographs, Pantographs, etc.
18. **Miscellaneous Devices.**—Animal Power, Sheep Shears, Movements and Devices, Elevators, Cranes, Sewing, Typewriting, and Printing Machines, Railway Devices, Trucks, Brakes, Turntables, Locomotives, Gas, Gas Furnaces, Acetylene Generators, Gasoline Mantel Lamps, Fire Arms, etc.

*** Copies prepaid to any address on receipt of price.

☞ *Send for Descriptive Circular.*

MUNN & CO., Publishers,

SCIENTIFIC AMERICAN OFFICE,

361 BROADWAY, NEW YORK.

Roper's New Engineer's Handy-Book

for STEAM ENGINEERS and ELECTRICIANS.

Thoroughly revised, rewritten and much enlarged by EDWIN R. KELLER, M.E., and CLAYTON W. PIKE, B.S., Ex-President of the Electrical Section of the Franklin Institute. Embracing all the recent improvements in the Steam Engine and giving full instructions for the

CARE and MANAGEMENT of an ELECTRICAL PLANT.

Nearly 900 pages, 325 illustrations, over 700 main subjects, 222 tables, and 645 questions most likely to be asked when under examination before being licensed as an engineer.

Full leather, gilt edges, pocketbook style, **$3.50.**

DAVID McKAY, Publisher,

Send for Circular. 1022 Market St., Philadelphia, Pa.

CUFFS HELD . . .

with the **Improved Washburne Patent Cuff Holders** can be placed just where you want them; will never slip but may be instantly released. Drawers Supporters, easily adjusted or taken off—excellent for holding golf trousers. By mail, 20c. the pair. ☞ *Catalogue showing these and other novelties, free.*

American Ring Co., Box P. Waterbury, Conn.

ACETYLENE APPARATUS

Acetylene number of the SCIENTIFIC AMERICAN SUPPLEMENT, describing, with full illustrations, the most recent, simple or home made and commercial apparatus for generating acetylene on the large and small scale. The gas as made for and used by the microscopist and student; its use in the magic lantern. The new French table lamp making its own acetylene. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1057.** Price 10 cents prepaid by mail. For other numerous valuable articles on this subject we refer you to page 21 of our new 1897 Supplement Catalogue, sent free to any address. MUNN & CO., 361 Broadway New York.



GOOD SALARY

Made selling **BEVERIDGE'S Sanitary Steam Cooker.** Distills the water, purifies the cooking. No burning, no odor. Saves labor and fuel, fits any stove. **Good pay to agents.** 2,385 sold in one town. Write (Box 963)

HOME Mfg. Co., BALTIMORE, MD.

Automobiles

The SCIENTIFIC AMERICAN for May 13, 1899, is devoted mainly to illustrations and detailed descriptions of various types of horseless vehicles. This issue also contains an article on the mechanics of the bicycle and detailed drawings of an automobile tricycle. Price 10 cents.

The following copies of the SCIENTIFIC AMERICAN SUPPLEMENT give many details, of Automobiles of different types, with many illustrations of the vehicles, motors, boilers, etc. The series make a very valuable treatise on the subject. The numbers are: 732, 979, 993, 1053, 1054, 1055, 1056, 1057, 1058, 1059, 1075, 1078, 1080, 1082, 1083, 1099, 1100, 1113, 1122, 1178, 1195, 1199, 1206, 1210. Price 10 cents each. by mail. For sale by all newsdealers or address

MUNN & CO., Publishers,

361 Broadway, New York.

Vehicle wheel, W. C. Jones 626,428
Vehicles, device for steering motor driven, E. J. Pennington 626,296
Vertical engine, W. E. Crane 626,368
Vise, E. H. Jones 626,427
Wagon body angle iron attachment, O. Johnson 626,236
Wagon brake, M. E. Sarvis 626,504
Waistband fastener, C. H. Muehler 626,333
Warping machine, F. L. Atherton 626,478
Washing machine, R. H. Scroggins 626,636
Water closet, L. H. Williams 626,645
Water closet flushing device, D. O. Seaman 626,346
Water column, W. S. Elliott 626,226
Water heater, G. P. Brintnall 626,454
Water meter, G. B. Bassett 626,518, 626,519, 626,647
Water wheel, R. B. Kummer 626,619
Weather strip, P. L. Hedberg 626,491
Welding, apparatus for holding carbons for electric, G. W. De Tunzelmann 626,352
Wheel. See Bicycle wheel. Car wheel. Fifth wheel. Metal wheel. Vehicle wheel. Water wheel.
Whip socket, J. H. Cooper 626,651
Winder, bobbin, D. G. Baker 626,403
Windmill, O. Olsson 626,559
Window, J. C. Hood 626,615
Wire gate, C. C. Korns 626,545
Wire splicing tool, S. F. Nicolai 626,438
Wood, impregnating, F. Hasselmann 626,538
Wrench. See Nut wrench. Pipe wrench. Tire bolt wrench.
Wrench attachment for combination tools, A. Metzger 626,285
Wringer. See Mop wringer.

DESIGNS.

Ash receiver or similar article, D. McMillan 30,936
Badge, J. T. Bailey 30,931
Badge, H. E. Oyer 30,932
Bandage, suspensor, E. A. E. Meyer 30,952
Bicycle frame, H. H. Baker, Jr. 30,970
Bicycle frame, Crowther & Timm 30,969
Bicycle handle bar, C. H. Metz 30,971
Box blank, paper, D. Heston 30,944, 30,945
Box lid clasp, L. Diesterweg 30,947
Button hooks, etc., handle for, Crees & Court 30,933
Car seat stand, A. M. Kittredge 30,957
Casket cover, C. M. Drennan 30,965
Clasp member, Lewis & Mixer 30,948, 30,949
Clip, paper, G. P. Farmer 30,946
Clock dial, M. M. Gillam 30,937
Communion cup filler, E. W. Ryan 30,935
Counter wall fixture, W. C. Huss 30,960
Cream separator bottom, C. F. Hawkins 30,962
Envelop blank, R. A. Byrne 30,943
Exercising machine terminal member, E. R. Goodridge 30,972
Eyeglass case, H. E. Guyer 30,934
Fabric, plaited, G. H. Taylor 30,974
Fence post, J. W. Brooks 30,959
Hinge, W. Taylor 30,954
Hinge guard arm, J. H. Pineo 30,953
Hook for waistband fastenings, W. I. Everson 30,950
Horseshoe, D. Howe 30,966
Hose nozzle, E. Cliff 30,956
Lamp body, P. C. Avery 30,941
Lamp hanger, incandescent, H. N. Qualey 30,942
Nut lock washer, Chapman & Gelatt 30,955
Rail, J. P. Johnson 30,958
Sad iron cross bar, O. W. Sabold 30,961
Scale, F. Taylor 30,938, 30,939
Scale frame, J. W. Culmer 30,940
Sole, shoe, C. H. Wiley 30,973
Stove, heating, E. H. Huenefeld 30,963
Surgical instruments, suction cup for, E. D. Saint Cyr, Jr. 30,951
Vehicle motor casing, H. S. Baldwin 30,968
Wheel, H. C. Clay 30,967
Window light, C. N. Schmitt 30,964

TRADE MARKS.

Accordions, Lyon & Healy 33,013
Ammunition, certain named, Peters Cartridge Company 33,053
Antiseptics, C. Prevet & Cie 33,046
Antiseptics and disinfectants, La Societe Chimique des Usines du Rhone, Anciennement Gillard, P. Monnet et Cartier 33,047
Baking powder, J. P. Dieter Company 33,038
Bearings for vehicle wheels, roller, J. R. Richardson 33,054
Boots and shoes, Witte & Danner 33,020
Bronces, brocades, and bronce colors, Eiermann & Tabor ..... 33,023 to 33,025
Candies, M. S. Cutting 33,031
Canned and preserved goods and food condiments, certain, Erie Preserving Company 33,036
Carpet sweepers, Grand Rapids School Furniture Company 33,055
Cereals, certain named, Texas Star Flour Mills 33,044
Cigars, cheroots, stogies, and cigarettes, L. A. Schaeffer & Company 33,026
Coffee, roasted, Oliver-Finnie Grocer Company 33,033
Cotton fabrics, Bernheimer & Walter 33,022
Electricity from the human system, instrument for removing, J. W. Shryock 33,051
Flour, meal, and peanuts, W. A. Whitehead & Son 33,043
Flour, self raising, Sleepy Eye Milling Company 33,039
Flour, wheat, Donmeyer, Gardner & Company, 33,040, 33,041
Flour, wheat, J. G. White & Company 33,042
Groceries, certain named, S. Hamill Company 33,037
Hams, F. P. Garrettson & Company 33,034
Pen, steel, Ormiston & Glass 33,014
Perfumes, toilet waters, and colognes, Ladd & Coffin 33,027
Phonographs and phonographic supplies, National Phonograph Company 33,015
Photographic developers, J. Hauff & Company, Gesellschaft mit Beschrankter Haftung, 33,016, 33,017
Plasters for corns and bunions, Probus Remedy Company 33,049
Salves and ointments, H. R. Gault 33,048
Sensitizing material, Haller-Kemper Company 33,018
Sheet metal and articles manufactured therefrom, nickelized, American Nickeloid Company 33,052
Shoes, ladies', Krippendorf-Dittmann Company 33,019
Soup stocks and flour made from cooked grain or seeds, McMorran & Company 33,035
Sulphur for use in baths, preparations for production of mascent, Ballard & Herman 33,050
Tea, coffee, and cocoa, Peek, Frean & Company 33,032
Tea, herb, I. Caldwell 33,045
Toilet preparations, certain named, Ladd & Coffin 33,028
Twine, Portland Cordage Company 33,021
Umbrella handles, composition for, United States Chemico-Wood Company 33,030
Washing fluid, H. Blum 33,029

LABELS.

"Adirondack Green," for chrome green in oil, Cawley, Clark & Company 6,952
"Aunt Edith's Liniment," for a liniment, E. A. Davis 6,959
"Benedict," for cigars, cheroots, and cigarettes, L. A. Schaeffer & Company 6,948
"Burnham's Cream Custard," for a food preparation, E. S. Burnham Company 6,950
"Dr. Bailey's Catarrh Cure," for a catarrh cure, Bailey Remedy Company 6,954
"Dr. Bean's Guaranteed Toothache Cure," for a medical compound, W. G. Bean & Company 6,956
"Dr. Robinson's Vegetable Compound Vita-Vin," for a medical compound, E. P. Robinson 6,957
"Faceline," for a face cream, W. H. Lotz 6,947
"Gobel's Rose Bud Gum," for chewing gum, W. H. Gobel 6,949
"Khasan's & Rosenweig's Emulsio Hypophosphatis Creosoti Comp." for a medical compound, Khasan & Rosensweig 6,958
"L. A. W. Headache Cure," for a medicine, H. H. Bulger 6,955
"Sure Death," for insect paste, C. V. Eckert 6,960
"Tiger Brand," for Portland cement, Castalia Portland Cement Company 6,953
"Urban and Suburban Mixed Paint," for mixed paint, Cawley, Clark & Company 6,951

PRINTS.

"Eddy Valves," for valves, Mohawk & Hudson Manufacturing Company 144
"The Gait that Sets the Pace," for valves, Mohawk & Hudson Manufacturing Company 145

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York. Special rates will be given where a large number of copies are desired at one time.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Sent on Ten Days Trial to Responsible Parties.

Sanitary Water Cooler

CONNECTED WITH CITY WATER PIPES.

Water does not come in contact with ice or outside air, thus keeping it pure and free from contamination.

Designed for Private Dining Rooms, Stores, Hotels, Offices, Restaurants, Factories, Schools, Public Institutions, Streets, Parks, Docks, Ferry Houses and everywhere where pure, cold drinking water is desired.

COLD WATER CAN BE DRAWN CONTINUOUSLY.

We placed one in Senate Wing of the Capitol at Washington in 1896. Read the following letter from the Chief Engineer:

SIRS:—It gives me pleasure to bear unqualified testimony in approval of the BARRON WATER COOLER, one of the largest of which has been in use in the Senate Wing of the U. S. Capitol for some time. It is always ready and easily fed and cleaned, and will pay for itself over and over comparatively in saving of ice.

Very respectfully,

THOS. A. JONES, Chief Engineer, Senate Wing, U. S. Capitol.

SAVES FULLY ONE-HALF THE ICE.

☞ *Send For Circular and Price List.*

THE BARRON COOLER CO., PALMYRA, N. Y., U. S. A.

50 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &c.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. Handbook on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**

Branch Office, 625 F St., Washington, D. C.

CLUTCH PULLEYS.
ROAD MOTOR ENGINES. WHEELS & TIRES.
EXPERIMENTAL AUTO-CAR WORK.
SINCLAIR-SCOTT CO. BALTIMORE, MD.

EVERYBODY HAS SOMETHING TO MEND

MENDSALL

Mends everything—china, glass, marble, bric-a-brac, etc. Requires no brush. Colorless, odorless, and will stand hot water. Sample bottle sent prepaid on receipt of **25c.**

AGENTS WANTED in every town and locality. Good agents can make big money. Write us about your locality.

GEM CHEMICAL CO.,

No. 8 S. Howard Street, BALTIMORE, MD.

PROPOSALS.

SEALED PROPOSALS WILL BE RECEIVED AT the Office of Lighthouse Engineer, Tompkinsville, N. Y., until 12 o'clock M., June 28, 1899, and then opened, for furnishing three Fourth Order Lanterns. Information furnished on application to

Lieut. Col. D. P. HEAP, Corps of Engineers, U. S. A.

MODELS for inventors. Estab. 1867. Catalogue. J. C. SEYL, 181 Madison St., Chicago.

ANN ARBOR MFG. CO. Ann Arbor, Mich. Desires Patented Specialties to Manufacture. *Correspondence Solicited.*

ICE MACHINES, Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton Street, Milwaukee, Wis.

ACETYLENE DEALERS' HAND BOOK Information net. 42 pp. 10 cts. F. CORTEZ WILSON & Co., Chicago

TYPE WHEELS, MODELS & EXPERIMENTAL WORK, SMALL MACHINERY NOVELTIES & ETC. NEW YORK STENCIL WORKS 100 NASSAU ST N.Y.

TURBINES ☞ Send for Circular "M." JAS. LEFFEL & CO. Springfield, Ohio, U. S. A.

WANTED 1050 ft. 3 inch cast iron pipe, lead, etc. Same amount of wrought pipe. The Winnsboro Bank, Winnsboro, S. C.

ESTIMATES WANTED

For manufacture for us of New Patent Door Lock. Single size and pattern only; universal tumbler design. Exclusive contracts. Addr., Segal & Co., 721 B'way, N.Y.

FOR SALE.—Canadian patent No. 61,119 (1898), English patent No. 27,368 (1898) and French patent on same invention. Address, L. M. Campau, 94 Fort St., W., Detroit, Mich.

PATENT RIGHTS FOR DISPOSAL.

A United States Patent issued December 20, 1898, also a Canadian Patent issued March 13, 1899, for Treble Sluice Boxes and Bridges, for drawing off Lakes, Ponds or any large body of water, wholly or partially as may be required. Drawings with specifications will be forwarded on application to **H. Hickmott, Weald Park, Brentwood, England,** the Patentee.



BEST BICYCLE BRAKE

All cyclists, whatever wheel they ride, should have attached the **Latest and Best Automatic Coaster and Brake.**

THE TREBERT BRAKE

is composed of a friction disk secured to the hub of rear wheel, a clutch on the disk and a clutch on the rear sprocket wheel. Both clutches have inclined surfaces upon which balls roll. When the bike chain is pulled forward, the balls also move forward and ride up their incline. Back pressure to pedals produces reverse motion. Free booklet of particulars.

Made only by the **Trebert Automatic Coaster and Brake Co.** SYRACUSE, N. Y.

Planning the New Home

Anyone contemplating the building of a new home will find the

Building Edition of the Scientific American

of peculiar and absorbing interest. This beautiful publication is issued monthly, and contains practical articles and suggestions on modern house building, together with a series of splendid plates, showing perspective views and floor plans of the most up-to-date modern dwellings, estimated cost, etc. A single issue of this handsome periodical is often worth the year's subscription price to the intending builder. Write to-day and send 25 cents for a single copy, or $2.50 for annual subscription.

MUNN & CO., Publishers, 361 Broadway, New York.

FOR SALE.

Patent Right No. 615537. The most complete Street Sweeper ever invented. Gathers and selects the fine from the coarse. Dustless, simple and durable. A fortune for the right man or a company. Address A. C. A. DUPUY, 1702 La Harpe St., New Orleans, La.



SAW HAMMERING

Instructions on approval to men of experience *only.*

MINER, LUMBERTON, MISS.

Big Reductions in Brass Band Instruments,

Drums and Uniforms. Write for catalog, 445 illustrations, **FREE;** it gives Band Music & Instructions for Amateur Bands.

LYON & HEALY 38 Adams St., Chicago.

GAS AND GASOLINE ENGINES
WATER MOTORS
BACKUS WATER MOTOR CO. NEWARK N. J. U. S. A.

THE BICYCLE: ITS INFLUENCE IN Health and Disease.—By G. M. Hammond, M.D. A valuable and interesting paper in which the subject is exhaustively treated from the following standpoints: 1. The use of the cycle by persons in health. 2. The use of the cycle by persons diseased. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **1002.** Price 10 cents. To be had at this office and from all newsdealers.

DUNLOP DETACHABLE TIRES

can be had on any well-known bicycle They cost the maker more, and the rider less.

The Repair Outfit.

Get our Booklet of any dealer or of us

THE AMERICAN DUNLOP TIRE CO., Belleville, N. J. Chicago, Ill.

YOU CAN MAKE $100. A WEEK!
OWN YOUR OWN SHOW, COMPLETE OUTFIT—$100.
LIFE MOTION FILMS & MACHINES.
GREAT PASSION PLAY & 500 OTHER SUBJECTS
ILLUSTR. CATALOGUES FREE.
S. LUBIN, LARGEST MFR. PHILADELPHIA P.A.

BICYCLE CHAINS

Kept Clean and Oiled. Our chain or sh does the business. Works automatically. Attaches to rear stay, has top and bottom brushes. Can't get out of order, keeps chain free from dust, mud, and always oiled. Postpaid 50 cents, in stamps. Every purchaser becomes agent.

HUTCHES & CO., 620 Isabella Bldg., CHICAGO, ILL.

COASTING WITH COMFORT.

No Danger. No Risk whatever when you have your machine **UNDER PERFECT CONTROL** at all times, as is the case with the

ECLIPSE BICYCLE with Morrow Automatic COASTER and BRAKE

You can regulate your speed at will with a **Backward or Forward Pressure on the Pedals.** The Simplest, Safest, Surest of devices. Write at once for particulars and prices to

ECLIPSE BICYCLE COMPANY, Box X, ELMIRA, N. Y.



© 1899 SCIENTIFIC AMERICAN, INC.

THOROUGH INSPECTIONS

HARTFORD STEAM BOILER INSPECTION AND INSURANCE CO. HARTFORD, CONN.

AND INSURANCE AGAINST LOSS OR DAMAGE TO PROPERTY AND LOSS OF LIFE AND INJURY TO PERSONS CAUSED BY

STEAM BOILER EXPLOSIONS

J. M. ALLEN, PRESIDENT · W. B. FRANKLIN, VICE PRESIDENT
J. B. PIERCE, SECRETARY · F. B. ALLEN, 2D VICE PRESIDENT
L. B. BRAINERD, ASST TREAS. · L. F. MIDDLEBROOK, ASST SEC'Y

FROM CLEVELAND TO NEW YORK.
A Winton Motor Phaeton

Made the run from Cleveland to New York City May 22d to 26th. Distance traveled, 707·4 miles. Actual running time, 47 hrs. and 34 min. Average speed per hour 15 miles. A convincing demonstration and a record that will stand. Hydro-Carbon System. ☞ *Write us for particulars.*

THE WINTON MOTOR CARRIAGE CO.,
472-478 Belden St., Cleveland, O.

NOEL'S SAFETY OAR-LOCK Patented in United States and Canada, of absolute superiority to any in use. These patents FOR SALE outright. Circulars and models will be sent to intending purchasers. Address all communications to: A. NOEL, Father Point, County Rimous 1, Province Quebec, Canada.

The "MOSSBERG" Tire Bell

No springs nor clockwork to operate its striking mechanism. TWO HAMMERS stand upright inside the bells. They strike the bells a sharp, quick blow, and immediately drop down, leaving the bells to vibrate freely, thus producing the loudest, clearest, most musical tones possible. Operated by means of a slight cord connecting with the handle bar.

The Slightest Touch Rings the Bell.

Nothing to get out of order. Never rattles. Prices: No. 1, Mossberg Chime, 75c. No. 2, Single Gong, 50c. *Sent postpaid direct from factory at these prices.*

FRANK MOSSBERG CO.,
P. O. Box 802, Attleboro, Mass.

HELMET OIL LUBRICATES ANYTHING. IF YOU HAVE A HOT BOX TRY IT. C. H. BESLY & CO. CHICAGO, ILL. U.S.A.

ACCOUNTANTS
who use the Comptometer
have no trouble with their trial balance. Has it ever occurred to you that by getting one you might save lots of time, avoid mistakes and not ruin your nerves?
Write for Pamphlet.
FELT & TARRANT MFG CO.
52-56 ILLINOIS ST., CHICAGO.

"PEGAMOID" TRADE MARK
ALUMINUM PAINT.

Latest application of Aluminum. Looks like Frosted Silver. Washable. Untarnishable. Water, Oil and Weatherproof. Durable. Easily Applied. Bicycles, Yachts, Radiators, Pipes, Metal Work, Machinery, Dynamos, Motors, Apparatus, Arc Lamps, Sockets, Brackets, Cars, Stations, General Decoration, etc. Sample bottle, by mail, for 25 cents.

THE AMERICAN PEGAMOID CO., 346 B'way, New York.

CHARTER Gasoline Engine

USED ANY PLACE BY ANYONE FOR ANY PURPOSE
Stationaries, Portables, Engines and Pumps.
☞ State your Power Needs.
CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

It's in the Demonstration

There has been a gigantic lot of theorizing on the feeding of fuel in a gas engine. In the Lozier Engine the best method is demonstrated. The last drop of gasoline in the tank will develop as much power as the first drop from a full one.

No tinkering with the valves necessary to maintain the efficiency. It may rain, snow or blow, but the Lozier Mixer prepares the gas for consumption, as though the fairest day in June was abroad in the land. It is in the demonstration that the Lozier Engine proves that it will run the same in foul as in fair weather.

Another fact, the piston is sprayed with oil at every stroke. Then there is the controlling throttle. The Lozier Engine is especially adapted to marine purposes. Let us communicate with you on the subject of launches or engines.

H. A. LOZIER & CO.
Maker Cleveland Bicycles,
Dept "A" Gas Engine Dept. CLEVELAND, O.

THE LOZIER ENGINE

WALTHAM WATCHES

The best and most reliable timekeepers made in this country or in any other.

The "Riverside" (trade-mark) movement is jeweled throughout with rubies and sapphires.

For sale by all jewelers.

STORAGE BATTERY BICYCLE LAMP.



U. S. B. Electric Bicycle Lamp

Follow our simple instructions, and we guarantee that
"IT WORKS."
Doesn't Blow Out or Jar Out.
SIMPLE, COMPACT, RELIABLE.
☞ We also manufacture Electric House and Carriage Lamps.

Recharger.

Recharge Batteries Yourself.
Cheaper than Oil or Gas.
If you want the best, buy the U. S. B.
It is without a match.
We Mail Catalogues.

UNITED STATES BATTERY COMPANY, 255 Broadway, New York. 258 Dearborn St., Chicago, Ill.

CRESCENT BICYCLES

Revelations of Beauty and Worth.

There is no variation in Crescent quality. The Crescent you buy has the same beauty, strength and ease of running as the Crescent your neighbor rides. The experience of both will be the same in rare cycling pleasure.

When you buy your '99 bicycle buy the Popular Wheel—The Crescent—sold at FAIR, FIXED Prices.

Catalogue No. 3 containing "Care of the Wheel," Free.

WESTERN WHEEL WORKS,
MAKERS
CHICAGO. NEW YORK.

Adults' Chain Models, $35
Bevel Gear Chainless Models, $60

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago Ill.

PHOTOGRAPHY IN COLORS – FORmulas for producing photographs in colors by the Chassagne process. SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 1114 and 1125. Price 10 cents each, by mail, from this office and from all newsdealers.

"THE LIGHT OF AMERICA"
for wheelmen is that given by the far-famed
MAJESTIC LAMP

Is the nearest approach to the sun as an artificial light. Always steady, clear and white. Easy to charge, easy to operate, always dependable. All parts metallic and easy to reach for cleaning purposes. A perfect searchlight for 100 feet ahead. Strongly, durably, neatly made. Best reflectors. Convex front glass. 2½ in. thick. Height of lamp 7½ inches. Burns 4 hours. Brass fittings, hanger of tough steel. Uses regular commercial carbide of any kind. ☞ *Send for free illustrated catalog "S.A."*

EDWARD MILLER & CO. Factories and Salesrooms, Meriden, Conn.
STORES: 28 & 30 West Broadway, NEW YORK. 63 Pearl St., BOSTON.
Manufacturers of "Royal" Bells and "Everlit" Oil Lamps.

Columbia Bevel-Gear Chainless

$60 to $75

$60 to $75

No power is lost at any point in the crank revolution, giving the Chainless a seeming activity and life of its own. This advantage over chain-driven wheels is apparent the moment you mount the machine. We have yet to hear of a rider of the Columbia Bevel-Gear Chainless who would willingly give it up for any other wheel.

CHAIN WHEELS.

COLUMBIAS, HARTFORDS and VEDETTES

Prices $25 to $50.

POPE MANUFACTURING COMPANY, Hartford, Conn.

Acetylene Bicycle Lamp.

Acetylene Lantern.

The Light is Right.
The BUNDY LAMPS
THE ONLY PERFECT
ACETYLENE GAS LAMPS

For Bicycle, Carriage, Physicians, Fire Departments, and Headlights. Efficient, easily charged and operated. Water absolutely controlled. Gives pure, dry gas. Manufactured by

The Frank E. Bundy Lamp Co.,
Elmira, N. Y., U. S. A.

(See illustrated editorial in SCIENTIFIC AMERICAN, April 15, 1899.)



Weight, 9½ ounces. Acetylene Gas Operating Lamp, for Physicians and Surgeons.

HIGH GRADE FOOT POWER LATHES
W. P. DAVIS, ROCHESTER, N. Y.

Tribune Bicycles
for 1899.
The Best Wheels in the World.



☞ *Write for large New Catalogue illustrating our full line of twenty-three models.*
The Black Mfg. Co., Erie, Pa.

No Bicycle is perfect without "THOR" FITTINGS

hubs, crank hangers, seat post expanders and handle bar expanders. The "Thor" crank hanger consists of patented two piece crank possessing the advantages of perfect simplicity, rigidity and security, removable at will without disturbing bearing parts or adjustment; the whole making the neatest, simplest and most perfect mechanism of a crank hanger ever produced. Any bicycle maker will put them on the wheel you order if you insist upon having them. See that the trade mark "THOR" is on Cranks, Hubs and Expanders. Write for Catalogue.

AURORA AUTOMATIC MACHINERY CO., Aurora, Ill.

CARBORUNDUM
GRINDING MATERIALS IN ALL FORMS.
THE CARBORUNDUM CO., - NIAGARA FALLS, N. Y.

THE RIGHT KIND OF VOLT-AMMETER

No inaccurate readings. Scale and binding posts being in different colors, prevent confusion in connections and readings. The finest instrument is our Direct Reading Volt-Ammeter. Thoroughly accurate and reliable. Range 20 volts and 15 amperes. Bearings are of hardened steel. Mirrored scale prevents errors of parallax. Aluminum cased and mahogany based. Carefully standardized. Express prepaid anywhere in U. S. for $6.50.

☞ *Send for our new physical catalogue.*
ZIEGLER ELECTRIC CO., Boston, Mass.

HERE IS SOMETHING NEW

OUR "RELIABLE JR."
A 50-ft. Steel Measuring Tape that weighs only 5 ounces complete.
For vest pocket. Leather case, ¼-in. tape; our patent flush handle, nickeled trimmings; guaranteed accurate; is practical, durable, convenient, and elegant; outside dimensions of case 2¾ in. diameter and ½ in. thick; made in 10ths or 12ths. Mailed upon receipt of $4.00. If not entirely satisfactory, return and will refund money.
☞ Send for our Measuring Tape Catalogue B.
LUFKIN RULE CO., Prescott Avenue, Saginaw, Mich.

TANKS, TOWERS and WINDMILLS.
For Manufacturing Plants, Hotels, Railroads, Waterworks Systems for Small Towns and Private Grounds.
Send for Illustrated Catalogue.
W. E. Caldwell Co., 221 E. Main St., Louisville, Ky.

HIRES Rootbeer
One package of Extract Fills Forty Pint Bottles.

Bottled Fun

Cut the string
And let it run;
Nothing like it
Under the sun.

There's delight in the flavor, there's health in the purity of HIRES Rootbeer. The great temperance drink. When the day is hot there is no drink so satisfying; when the vitality is low no drink is so beneficial; when you are over heated no drink is so cooling as

HIRES Rootbeer

A temperance drink for everybody.

Make it yourself at home. A package of Extract makes five gallons. **Hires Rootbeer, Carbonated** ready for drinking. Sold everywhere by the bottle and case. Write to THE CHARLES E. HIRES COMPANY, Philadelphia, and ask how a boy can make from 40 cents to $4.50 per day.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM JESSOP & SONS LTD 91 JOHN ST. NEW YORK

PRINTING INKS

The SCIENTIFIC AMERICAN is printed with CHAS ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York

© 1899 SCIENTIFIC AMERICAN, INC.